



Air₍₄₎ Catalogue

Vers. 4.0

EN

- II-III** Air₄ Remotes
- IV** Air₄ Plus Remotes
- V** Easy Scan Plus and Software
- VI** Support Material
- VII** Customized Air₄
 - 1** Residential Remotes Guide
 - 88** Residential Remotes Procedures
- 111** Contents



IT

- II-III** Radiocomandi Air₄
- IV** Radiocomandi Air₄ Plus
- V** Easy Scan Plus e Software
- VI** Materiale di Supporto
- VII** Air₄ Personalizzati
 - 1** Guida ai Radiocomandi
 - 88** Procedure Radiocomandi
- 111** Indice

DE

- II-III** Funkfernbedienungen Air₄
- IV** Funkfernbedienungen Air₄ Plus
- V** Easy Scan Plus und Software
- VI** Werbematerialen
- VII** Air₄ Personalisiert
 - 1** Führer für Funkfernbedienungen
 - 88** Funkfernbedienungen Vorgehenweise
- 111** Inhalt

FR

- II-III** Télécommandes Air₄
- IV** Télécommandes Air₄ Plus
- V** Easy Scan Plus et Software
- VI** Matériel de Dupport
- VII** Air₄ Personalisées
 - 1** Guide Télécommandes
 - 88** Procédures Télécommandes
- 111** Sommaire

ES

- II-III** Mandos a distancia Air₄
- IV** Mandos a distancia Air₄ Plus
- V** Easy Scan Plus y Software
- VI** Materiale di Supporto
- VII** Air₄ Personalizados
 - 1** Guía Radiocomandos
 - 88** Procedimiento dos Radiocomandos
- 111** Sumario

PT

- II-III** Rádio Controlos Air₄
- IV** Rádio Controlos Air₄ Plus
- V** Easy Scan Plus e Software
- VI** Materiales Informativos
- VII** Air₄ Personalizados
 - 1** Guia Rádio Controlos
 - 88** Procedimento Rádio Controlos
- 111** Sumário

NL

- II-III** Afstandsbedieningen Air₄
- IV** Afstandsbedieningen Air₄ Plus
- V** Easy Scan Plus en Software
- VI** Ondersteunende Materialen
- VII** Air₄ Persoonlijke
 - 1** Gids Afstandsbedieningen
 - 88** Procedure Afstandsbedieningen
- 111** Inhoud

Index



Air4 Residential Remotes



Residential Remotes Air4

Silca Air4 is the ideal way to duplicate remote controls for automatic garage doors, gates, barriers and awnings.

Air4 comes in 4 different versions:

- **Air4 Plus V:** for frequencies 433.92 and 868.35 MHz (AM/FM), fixed and rolling codes. Compatible with Easy Scan Plus and "Air4 Plus Remotes Programming Software" to offer a range of advanced features. Updateable with latest applications developed by Silca.

- **Air4 V:** For remotes with frequencies ranging from 433.92 to 868.35* MHz (AM/FM, fixed and rolling codes).

* Frequency not available in Australia.

- **Air4 L:** for remotes using a fixed frequency of 433.92 MHz AM plus many of the most popular remotes using rolling codes.

- **Air4 Q:** for quartz remotes with frequencies ranging from 27 to 40.685 MHz.

Radiocomandi Residenziali Air4

Air4 è la soluzione ideale per duplicare radiocomandi per l'apertura di portoni basculanti, cancelli, sbarre e tende da sole.

La gamma Air4 è disponibile in 4 versioni:

- **Air4 Plus V:** per radiocomandi a frequenza 433.92 e 868.35 MHz (AM/FM) a codice fisso e rolling. Compatibile con Easy Scan Plus e "Air4 Remotes Programming Software", offre la possibilità di utilizzare una serie di funzioni avanzate. I radiocomandi Air4 Plus sono sempre aggiornabili con nuovi modelli e nuove funzioni.

- **Air4 V:** per radiocomandi con frequenze 433.92 e 868.35* MHz (AM/FM) (codice fisso e rolling).

* Frequenza non valida in Australia.

- **Air4 L:** per radiocomandi a codice fisso e rolling con frequenza 433.92 MHz (AM) tra i più utilizzati e conosciuti nel mercato.

- **Air4 Q:** per radiocomandi quarzati con frequenza compresa tra 27 e 40.685 MHz.

Funkfernbedienung Air4

Air4 die Qualitätslösung für die Kopie von Funkfernbedienungen im Wohnbereich, die der automatisierten Öffnung von Schranken, Gitter-, Schwing- und Sektionaltoren, Markisen dienen.

Die Air4-Linie ist in 4 Versionen:

- **Air4 Plus V:** für Funkfernbedienung mit Frequenz 433.92 und 868.35 MHz (AM/FM) mit Festcode und Rolling Code. Mit Easy Scan Plus und "Air4 Programming Software" kompatibel, bietet sie die Möglichkeit, mehrere erweiterte Funktionen zu nutzen. Air4 Plus- Funkfernbedienung immer mit neuen Modellen und neuen Funktionen aktualisiert werden.

- **Air4 V:** für Funkfernbedienung mit den Frequenzen 433.92 und 868.35* MHz (AM/FM) (Festcode und Rolling Code).

* In Australien ungültige Frequenz.

- **Air4 L:** für Funkfernbedienung mit Festcode und Rolling Code mit Frequenz 433.92 MHz (AM), die zu den bekanntesten und meistverwendeten auf dem Markt gehören.

- **Air4 Q:** für Quarz- Funkfernbedienung mit Frequenz zwischen 27 und 40.685 MHz.

Télécommandes Air4

Air4 est la solution de premier choix pour les télécommandes à usage domestique adaptées aux barrières, aux portails, aux portes de garage et aux auvents.

La gamme Air4 est proposée en 4 versions:

- **Air4 Plus V:** pour les télécommandes de 433.92 et 868.35 MHz (AM/FM) à code fixe et à codes variables. Compatibile avec l'Easy Scan Plus et "Air4 Programming Software", l'Air4 Plus vous permettra d'utiliser toute une série de fonctions avancées. Les télécommandes Air4 Plus peuvent toujours être mises à jour sur les nouveaux modèles et les nouvelles fonctions.

- **Air4 V:** pour télécommandes de fréquences 433.92 et 868.35* MHz (AM/FM) (code fixe et codes variables).

* Fréquence non valable en Australie.

- **Air4 L:** pour télécommandes à code fixe et à codes variables de fréquence 433.92 MHz (AM) couvrant ainsi les modèles les plus utilisés et connus sur le marché.

- **Air4 Q:** pour les télécommandes quartz ayant une fréquence comprise entre 27 et 40.685 MHz.

Air4 Residential Remotes



Telemandos a distancia Air4

Air4 es la primera solución para mandos a distancia residenciales para barreras, puertas, garajes y cortinas solares.

La gama Air4 iste en 4 versiones:

- **Air4 Plus V:** para telemandos con frecuencia 433.92 y 868.35 MHz (AM/FM) con código fijo y rolling. Compatible con Easy Scan Plus y "Air4 Programming Software", permite usar una serie de funciones avanzadas. Los telemandos Air4 se actualizan siempre con nuevos modelos y funciones.

- **Air4 V:** pour télécommandes de fréquences 433.92 et 868.35* MHz (AM/FM) (code fixe et codes variables).

* Fréquence non valable en Australie.

- **Air4 L:** pour télécommandes à code fixe et à codes variables de fréquence 433.92 MHz (AM) couvrant ainsi les modèles les plus utilisés et connus sur le marché.

- **Air4 Q:** pour les télécommandes quartz ayant une fréquence comprise entre 27 et 40.685 MHz.

Afstandsbedieningen Air4

Air4 is de eersteklas oplossing voor afstandsbedieningen geschikt voor poorten, slagbomen, garagedeuren en Luifels.

De Air4 is beschikbaar in 4 verschillende versies:

- **Air4 Plus V:** voor frequenties 433.92 en 868.35 MHz (AM/FM) met vaste en variabele codes. Compatibel met de Easy Scan Plus en de "Air4 Programming Software" voor afstandsbedieningen om een reeks geavanceerde functies aan te bieden. Dat afstandsbedieningen kunnen worden bijgewerkt met de nieuwste applicaties ontwikkeld door Silca.

- **Air4 V:** voor afstandsbedieningen met vaste en variabele codes met frequenties tussen 433.92 en 8.35* MHz (AM/FM).

* Frequentie niet beschikbaar in Australië.

- **Air4 L:** voor afstandsbedieningen met vaste codes met een frequentie van 433.92 MHz (AM) en voor veel populaire afstandsbedieningen met variabele codes.

- **Air4 Q:** voor kwartsafstandsbedieningen met frequenties tussen 27 en 40.685 MHz.

Rádio Controlos Air4

Air4 é a solução de qualidade para duplicar rádio controlos para uso residencial para a abertura automatizada de barreiras, grades, portões basculantes e seccionados, cortinas de sol.

A gama Air4 está disponível em 4 versões:

- **Air4 Plus V:** para rádio controlos de frequência 433.92 e 868.35 MHz (AM/FM) de código fixo e rolling. Compatível com Easy Scan Plus e "Air4 Programming Software", dá a possibilidade de utilizar uma série de funções avançadas. Os rádio controlos Air4 Plus são sempre actualizáveis com novos modelos e novas funções.

- **Air4 V:** para rádio controlos com frequências 433.92 e 868.35* MHz (AM/FM) (código fixo e rolling).

* Frequência não válida na Austrália.

- **Air4 L:** para rádio controlos de código fixo e rolling com frequência 433.92 MHz (AM) entre os mais utilizados e conhecidos no mercado.

- **Air4 Q:** para rádio controlos quarzados com frequência incluída entre 27 e 40.685 MHz.

Available in 5 colours



Air4 is a CE Certified Product



Air4 Plus Residential Remote



Residential Remote Air4 Plus

Air4 Plus is the Silca remote that together with Easy Scan Plus and the "Air4 Plus Programming Software" offers a range of advanced features necessary to offer a complete residential remotes duplication service.

Thanks to the use of NFC technology Air4 Plus remotes are always updateable with the latest original remote applications developed by Silca.

Télécommande Air4 Plus

Air4 Plus est la radiocommande Silca qui, avec le dispositif Easy Scan Plus et "Air4 Plus Programming Software", offre la possibilité d'exploiter une série de fonctions avancées.

Grâce à l'application de la technologie NFC, les télécommandes Air4 Plus peuvent toujours être mises à jour sur les nouveaux modèles et les nouvelles fonctions.

Afstandsbedieningen Air4 Plus

Air4 Plus is de Silca afstandsbediening die in combinatie met het Easy Scan Plus toestel en de "Air4 Plus Programming Software" de mogelijkheid biedt een reeks geavanceerde functies te benutten.

Gebruik van NFC-technologie betekent dat afstands-bedieningen kunnen worden bijgewerkt met de nieuwste applicaties ontwikkeld door Silca.

Radiocomando Residenziale Air4 Plus

Air4 Plus è il radiocomando Silca che, unitamente al dispositivo Easy Scan Plus e "Air4 Plus Programming Software", offre la possibilità di utilizzare una serie di funzioni avanzate.

Grazie all'applicazione della tecnologia NFC i radiocomandi Air4 Plus sono sempre aggiornabili con nuovi modelli e nuove funzioni.

Telemando a distancia Air4 Plus

Air4 Plus es el radiomando Silca que, junto al dispositivo Easy Scan Plus y "Air4 Plus Programming Software", ofrece la posibilidad de usar una serie de funciones avanzadas.

Mediante la aplicación de la tecnología NFC, los telemandos Air4 se actualizan siempre con nuevos modelos y funciones.

Funkfernbedienung Air4 Plus

Air4 Plus ist die Silca-Fernbedienung, die zusammen mit Easy Scan Plus und der "Air4 Plus Programming Software" die Möglichkeit bietet, mehrere erweiterte Funktionen zu nutzen.

Dank der NFC-Technologie können Air4 Plus- Funkfernbedienung immer mit neuen Modellen und neuen Funktionen aktualisiert werden.

Rádio Controlo Air4 Plus

Air4 Plus é o rádio controlo Silca que, juntamente com o dispositivo Easy Scan Plus e "Air4 Plus Programming Software", possibilita a utilização de uma série de funções avançadas.

Gracias à aplicação da tecnologia NFC, os rádio controlos Air4 Plus são sempre actualizáveis com novos modelos e novas funções.

Easy Scan Plus Software Activation Kit



Easy Scan Plus and Software



Easy Scan Plus and Air⁴ Plus Programming Software

Easy Scan Plus guides you through the entire duplication process; identifying the original remote, advising which Silca remote is needed and copying the new remote. The software database of remotes means that a duplicate can be generated even in the absence of the original.

Push button functions can easily be customized using the 'drag and drop' feature.

Easy Scan Plus et Air⁴ Plus Programming Software

L'Easy Scan Plus vous guidera à travers tout le processus de reproduction et vous indiquera si la télécommande originale est reproductible tout en indiquant quel Air⁴ Silca utiliser. La base de données du logiciel vous permettra de reproduire la télécommande sans avoir besoin de l'original.

Avec ce logiciel, les boutons d'Air⁴ peuvent être personnalisés via la fonction 'drag and drop'.

Easy Scan Plus en Air⁴ Plus Programming Software

De Easy Scan Plus begeleidt u doorheen het hele duplicatieproces: het toestel identificeert de originele afstandsbediening, adviseert welke afstandsbediening van Silca nodig is en kopieert de nieuwe afstandsbediening. Dankzij de softwaredatabank van afstandsbedieningen kan een dupliaat worden gegenereerd zonder dat het origineel nodig is.

De knoppen van de Air⁴ kunnen bij gebruik van de software volgens de persoonlijke voorkeur van de gebruiker worden ingesteld via de 'drag and drop' functie.

Easy Scan Plus e Air⁴ Plus Programming Software

Easy Scan Plus ti guida attraverso l'intero processo di duplicazione, determinando se il radiocomando originale è duplicabile e indicando quale Air⁴ Plus utilizzare. Il database del software ti permette di duplicare il radiocomando senza bisogno dell'originale.

Con l'utilizzo del software, i pulsanti di Air⁴ possono essere personalizzati utilizzando la funzione 'drag and drop'.

Easy Scan Plus und Air⁴ Plus Programming Software

Easy Scan Plus und Air⁴ Plus Programming Software


Easy Scan Plus führt Sie durch den gesamten Kopiervorgang und gibt an, ob die Original-Fernbedienung kopiert werden kann und welches Silca Air⁴-Modell verwendet werden muss. Die Software-Datenbank bietet Ihnen die Möglichkeit, die Funkfernbedienung zu kopieren.

Mit der Software können die Air⁴-Tasten mit der Drag and Drop-Funktion personalisiert werden.

Easy Scan Plus und Air⁴ Plus Programming Software


Easy Scan Plus acompanha-o ao longo do inteiro procedimento de duplicação, determinando se o rádio controlo original pode ser duplicado e indicando qual Air⁴ utilizar. O banco de dados do software permite duplicar o rádio controlo sem precisar do original.

Através do software, os botões de Air⁴ podem ser personalizados utilizando a função 'drag and drop'.

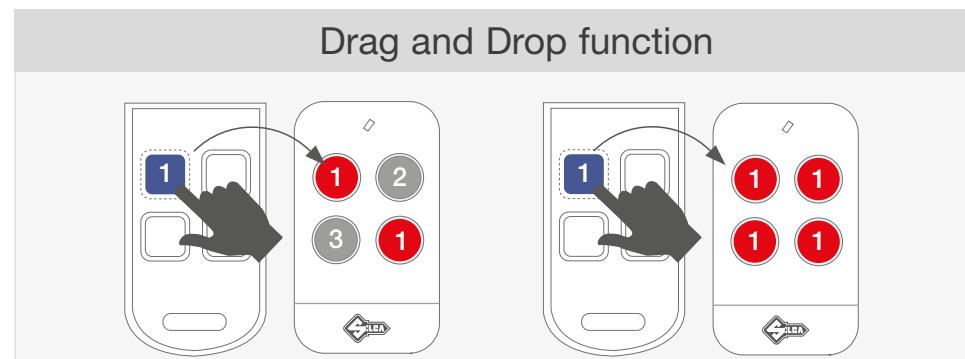



Air4 Support Material

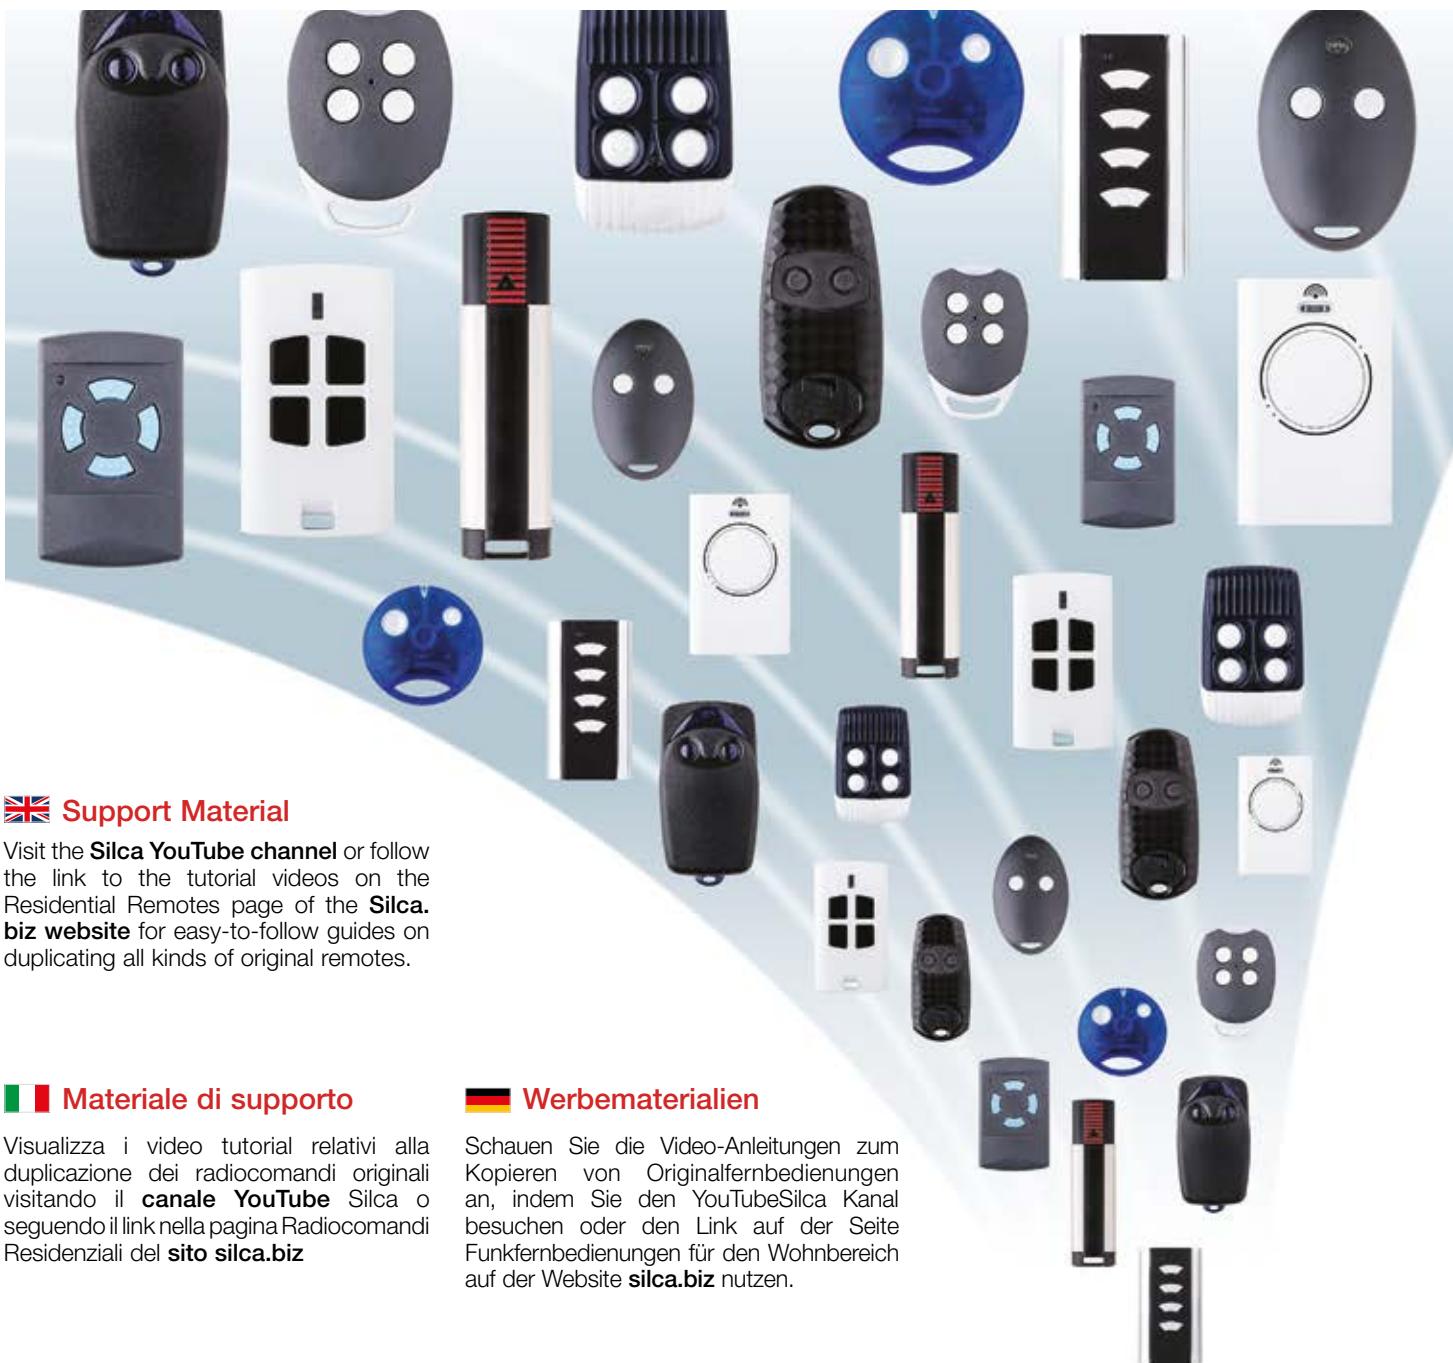

🇬🇧 Support Material

Visit the **Silca YouTube channel** or follow the link to the tutorial videos on the Residential Remotes page of the **Silca.biz website** for easy-to-follow guides on duplicating all kinds of original remotes.

🇮🇹 Materiale di supporto

Visualizza i video tutorial relativi alla duplicazione dei radiocomandi originali visitando il **canale YouTube Silca** o seguendo il link nella pagina Radiocomandi Residenziali del **sito silca.biz**

🇩🇪 Werbematerialien

Schauen Sie die Video-Anleitungen zum Kopieren von Originalfernbedienungen an, indem Sie den YouTubeSilca Kanal besuchen oder den Link auf der Seite Funkfernbedienungen für den Wohnbereich auf der Website **silca.biz** nutzen.

🇫🇷 Matériel de support

Visualisation des vidéos tutorielles relatives à la reproduction des radiocommandes originales **via YouTube Silca** ou via le lien de la page Radiocommandes Résidentielles du **sito silca.biz**

🇪🇸 Materiales informativos

Mira los vídeos tutoriales sobre la duplicación de los radiomandos originales en el **canal YouTube Silca** o en el enlace de la página Radiomandos Residenciales del **sito silca.biz**

🇵🇹 Materiais de suporte

Visualize os vídeo tutoriais relativos à duplicação dos rádio controlos originais visitando o **canal YouTube Silca** ou seguindo o link na página Rádio controlos Residenciais do **sito silca.biz**

🇳🇱 Ondersteunende materialen

Bekijk de tutorial filmpjes op het You-tube-kanal van Silca voor de duplicatie van de originele afstandsbediening of via de link op de pagina Afstandsbedieningen voor Residentieel Gebruik op de website **silca.biz**



Customized Air4



UK Customized Air4

With Silca it's possible to make your Air4 residential remotes unique by customizing the shell. Two areas are available for printing your brand, your logo, the address or telephone number of your shop, your website, or any other message or image of your choice. Contact your Silca representative or distributor for further information.

IT Air4 Personalizzati

Silca ti offre la possibilità di rendere unici i tuoi radiocomandi residenziali Air4 personalizzandone il retro. Due le aree a tua disposizione per stampare il tuo logo o marchio, l'indirizzo o il numero di telefono del tuo negozio, il tuo sito internet, o qualsiasi altra scritta e immagine a tua scelta.

Contatta il tuo rappresentante di fiducia per maggiori informazioni.

DE Air4 Personalisiert

Mit Silca können Sie Ihre Funkfernbedienung Air4 für den Wohnbereich durch die Individualisierung auf der Rückseite einzigartig machen. Sie haben zwei Bereiche für den Aufdruck Ihres Logos oder Ihrer Marke, der Adresse oder Telefonnummer Ihres Geschäfts oder sonstiger Bilder und Schriftzüge zur Verfügung.

Kontaktieren Sie Ihren Vertreter für weitere Infos.

FR Air4 Personnalisées

Silca vous offre la possibilité de rendre vos télécommandes résidentielles Air4 uniques en les personnalisant au verso. Vous aurez deux espaces à disposition pour imprimer votre logo ou votre marque, l'adresse ou le numéro de téléphone de votre magasin, votre site Internet, ou tout autre inscription et image de votre choix.

Contact your Silca representative or distributor for further information.

ES Air4 Personalizados

Silca te permite convertir tus radiomandos residenciales Air4 en dispositivos únicos mediante la personalización de la tapa trasera. Dos son las áreas disponibles para que puedas imprimir tu logotipo o marca, la dirección o el número de teléfono de tu tienda, tu sitio Internet u otros mensajes e imágenes a tu elección.

Póngase en contacto con su representante para obtener más información.

PT Air4 Personalizados

A Silca dá-lhe a possibilidade de tornar únicos os seus rádio controlos residenciais Air4 personalizando a parte traseira. São duas as áreas à disposição para imprimir o seu logotipo ou a sua marca, o endereço ou o número de telefone da sua loja, o seu site Internet, ou qualquer outra frase ou imagem que deseje.

Contacte o seu representante para obter mais informações.

NL Air4 Persoonlijke

Silca geeft u de mogelijkheid om uw afstandsbedieningen voor residentieel gebruik Air4 uniek te maken door de achtergrond een persoonlijke tint te geven. Er zijn twee zones waarop u uw logo, merk, adres, het telefoonnummer van uw winkel, uw website of gelijke welke andere informatie of afbeelding naar wens kan drukken.

Neem contact op met uw vertegenwoordiger voor meer informatie.





Remotes Guide

Guida ai Radiocomandi
Führer für Funkfernbedienungen
Guide télécommande
Guía radiocomandos
Guia rádio controlos
Gids Afstandsbedieningen

Air⁴ Remotes

| COLORS | GRAPHITE | POWDER BLUE | RED | DOVE GREY | IVORY |
|-------------------------|----------|-------------|----------|-----------|----------|
| | | | | | |
| Air4 L | RKE10021 | RKE10022 | RKE10023 | RKE10024 | RKE10025 |
| Air4 L (IB) | RKE10121 | RKE10122 | RKE10123 | RKE10124 | RKE10125 |
| Air4 V | RKE15021 | RKE15022 | RKE15023 | RKE15024 | RKE15025 |
| Air4 V Plus (EU) | RKE25021 | RKE25022 | RKE25023 | RKE25024 | RKE25025 |
| Air4 V Plus (IB) | RKE25121 | RKE25122 | RKE25123 | RKE25124 | RKE25125 |

EU = Europe · IB = Spain and Portugal

| Air4 Q | | |
|---------------|----------|----------|
| | | |
| RKE20007 | RKE20008 | RKE20009 |

Box of 5 pcs, one per color

| | |
|-------------------------|-----------|
| Air4 L | ARKE10000 |
| Air4 L (IB) | ARKE10100 |
| Air4 L2 | ARKE30000 |
| Air4 V | ARKE15000 |
| Air4 V Plus (EU) | ARKE25000 |

2016 design and F Type can be programmed as per this catalogue indications.



Air⁴ Residential Remotes



Air⁴ Remotes

A

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe • IB = Spain and Portugal



FOR ACM®

| | |
|----------------------------|------------------------------------|
| MODEL | TX2 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.9 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR ACM®

| | |
|----------------------------|------------------------------------|
| MODEL | TX4 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.9 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR ADYX®

| | |
|----------------------------|--|
| MODEL | 433-HG BRAVO |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR ADYX®

| | |
|----------------------------|--|
| MODEL | TE4433H BLUE |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR ADYX®

| | |
|----------------------------|--|
| MODEL | TM-433 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR AERF®

| | |
|----------------------------|--|
| MODEL | BT |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR AERF®

| | |
|----------------------------|---------------------------------------|
| MODEL | COMPACT |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | F, V, V PLUS (EU), V PLUS (IB) |



FOR AERF®

| | |
|----------------------------|--|
| MODEL | HY-DOM |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L (IB), F, V, V PLUS (EU), V PLUS (IB) |



FOR AERF®

| | |
|----------------------------|--|
| MODEL | MARS |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L (IB), F, V, V PLUS (EU), V PLUS (IB) |



FOR AERF®

| | |
|----------------------------|------------------------------------|
| MODEL | MARS |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 868.3 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |

Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue et MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatiblen Silca Air4-Fernbedienungen zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiocomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.



Air4 Residential Remotes

Air₄ Remotes

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe · IB = Spain and Portugal



| FOR AERF® | |
|----------------------------|---|
| MODEL | MERCURY B |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L (IB), F, V, V PLUS (EU), V PLUS (IB) |



| FOR AERF® | |
|----------------------------|-----------------------------|
| MODEL | MERCURY B |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 868.3 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



| FOR AERF® | |
|----------------------------|---|
| MODEL | MERCURY C |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L (IB), F, V, V PLUS (EU), V PLUS (IB) |



| FOR AERF® | |
|----------------------------|-----------------------------|
| MODEL | MERCURY C |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 868.3 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



| FOR AERF® | |
|----------------------------|--------------------------------|
| MODEL | SABUTON |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | F, V, V PLUS (EU), V PLUS (IB) |



| FOR AERF® | |
|----------------------------|---|
| MODEL | SATURN |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L (IB), F, V, V PLUS (EU), V PLUS (IB) |



| FOR AERF® | |
|----------------------------|--------------------------------|
| MODEL | ST3/N |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | F, V, V PLUS (EU), V PLUS (IB) |



| FOR AERF® | |
|----------------------------|--------------------------------|
| MODEL | TERRA |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | F, V, V PLUS (EU), V PLUS (IB) |



| FOR AERF® | |
|----------------------------|--------------------------------|
| MODEL | TMP-1 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | F, V, V PLUS (EU), V PLUS (IB) |



| FOR AERF® | |
|----------------------------|--------------------------------|
| MODEL | TMP-2 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | F, V, V PLUS (EU), V PLUS (IB) |

Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue e MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatiblen Silca Air4-Fernbedienungen zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.

Air⁴ Residential Remotes



Air⁴ Remotes

A

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe • IB = Spain and Portugal



FOR AERF®

| | |
|----------------------------|--|
| MODEL | TTS |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR AERF®

| | |
|----------------------------|---------------------------------------|
| MODEL | UNITECH |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | F, V, V PLUS (EU), V PLUS (IB) |



FOR ALBANO®

| | |
|----------------------------|------------------------|
| MODEL | MICRO TRINARY-B |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 30.875 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | Q |



FOR ALBANO®

| | |
|----------------------------|------------------------|
| MODEL | TX-MICROTRINARY |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 30.545 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR ALBANO®

| | |
|----------------------------|-------------------|
| MODEL | TX-PLC |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 33.1 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR ALBANO®

| | |
|----------------------------|-------------------|
| MODEL | TX-PR |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 33.1 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR ALBANO®

| | |
|----------------------------|-------------------|
| MODEL | TX-TRINARY |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 30.875 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR ALFA TORRES®

| | |
|----------------------------|--|
| MODEL | RT1 - RT2 ALFA |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR ALFA TORRES®

| | |
|----------------------------|-----------------------|
| MODEL | TP2 MINI |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 868.3 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (IB) |



FOR ALLMATIC®

| | |
|----------------------------|-------------------|
| MODEL | AKMX |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 40 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |

Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue et MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatible Silca Air4-Fernbedienung zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiocomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.



Air4 Residential Remotes

Air₄ Remotes

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe · IB = Spain and Portugal



| FOR ALLMATIC® | |
|----------------------------|-------------------|
| MODEL | AKMX |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 30.9 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



| FOR ALLMATIC® | |
|----------------------------|-------------------|
| MODEL | AKMY |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 40.665 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



| FOR ALLMATIC® | |
|----------------------------|-------------------|
| MODEL | AKMY |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 30.875 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



| FOR ALLMATIC® | |
|----------------------------|------------------------------------|
| MODEL | ASMX2 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



| FOR ALLMATIC® | |
|----------------------------|------------------------------------|
| MODEL | ASMY |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



| FOR ALLMATIC® | |
|----------------------------|--|
| MODEL | B.RO 2WN |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



| FOR ALLMATIC® | |
|----------------------------|--|
| MODEL | B.RO 3WN |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



| FOR ALLMATIC® | |
|----------------------------|--|
| MODEL | B.RO 4WN |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



| FOR ALLMATIC® | |
|----------------------------|--|
| MODEL | B.RO OVER |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



| FOR ALLMATIC® | |
|----------------------------|--|
| MODEL | B.RO WN RED |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |

Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue et MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatiblen Silca Air4-Fernbedienungen zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.

Air⁴ Residential Remotes



Air⁴ Remotes

A

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe • IB = Spain and Portugal



FOR ALLMATIC®

| | |
|----------------------------|--|
| MODEL | MINIPASS |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR ALLMATIC®

| | |
|----------------------------|--|
| MODEL | PASS |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR ALLMATIC®

| | |
|----------------------------|--|
| MODEL | TECH3 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR ALLTRONIK®

| | |
|----------------------------|-------------------|
| MODEL | S206 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 27.015 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR ALLTRONIK®

| | |
|----------------------------|-------------------|
| MODEL | S215 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 27.015 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR ALLTRONIK®

| | |
|----------------------------|-------------------|
| MODEL | S235 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 27.015 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR ALLTRONIK®

| | |
|----------------------------|-------------------|
| MODEL | S406 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 40.685 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR ALLTRONIK®

| | |
|----------------------------|-------------------|
| MODEL | S406 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 27.015 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR ALLTRONIK®

| | |
|----------------------------|-------------------|
| MODEL | S415 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 40.685 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR ALLTRONIK®

| | |
|----------------------------|-------------------|
| MODEL | S415 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 27.015 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |

Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue et MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatiblen Silca Air4-Fernbedienungen zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiocomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.



Air4 Residential Remotes

Air₄ Remotes

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe • IB = Spain and Portugal



| FOR ALLTRONIK® | |
|----------------------------|--|
| MODEL | S425 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



| FOR ALLTRONIK® | |
|----------------------------|-------------------|
| MODEL | S435 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 40.685 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



| FOR ALLTRONIK® | |
|----------------------------|-------------------|
| MODEL | S435 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 27.015 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



| FOR ALLTRONIK® | |
|----------------------------|-------------------|
| MODEL | S435-B |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 40.685 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



| FOR ALLTRONIK® | |
|----------------------------|-------------------|
| MODEL | S435-B |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 27.015 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |

Image
not
available



| FOR ALUKON® | |
|----------------------------|------------------------------------|
| MODEL | MT87A1 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 868.5 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



| FOR ALUKON® | |
|----------------------------|------------------------------------|
| MODEL | COMFORT 220 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 868.3 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



| FOR ALULUX® | |
|----------------------------|------------------------------------|
| MODEL | DIGITAL 302 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 868.3 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



| FOR ALULUX® | |
|----------------------------|-------------------|
| MODEL | H-S40 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 40.685 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |

Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue e MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatiblen Silca Air4-Fernbedienungen zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiocomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.

Air⁴ Residential Remotes



Air⁴ Remotes

A

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe • IB = Spain and Portugal



FOR ALULUX®

| | |
|----------------------------|-------------------|
| MODEL | MS 40 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 40.685 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |




FOR ALULUX®

| | |
|----------------------------|-------------------|
| MODEL | MT 40A |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 40.685 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR ALULUX®

| | |
|----------------------------|------------------------------------|
| MODEL | MT87A1 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 868.5 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR ALULUX®

| | |
|----------------------------|-------------------|
| MODEL | RATOR 40 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 40.685 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |

Image
not
available

FOR ALUTEC®

| | |
|----------------------------|-------------------|
| MODEL | RFKCO-40-5 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 40.685 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |

Image
not
available

FOR ALUTEC®

| | |
|----------------------------|---------------------|
| MODEL | T102497-40-5 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 40.685 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |

Image
not
available

FOR ALUTEC®

| | |
|----------------------------|-------------------|
| MODEL | T397-40-2 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 40.685 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR ANSONIC®

| | |
|----------------------------|-------------------|
| MODEL | SA40 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 40.685 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR ANSONIC®

| | |
|----------------------------|--|
| MODEL | SA43 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR ANSONIC®

| | |
|----------------------------|-------------------|
| MODEL | SF40 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 40.665 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |

Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue et MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatiblen Silca Air4-Fernbedienungen zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiocomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.



Air4 Residential Remotes

Air₄ Remotes

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe • IB = Spain and Portugal



FOR ANSONIC®

| | |
|----------------------------|------------------------------------|
| MODEL | SF433 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.075 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR APERTO®

| | |
|----------------------------|--|
| MODEL | CPS |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |

FOR APERTO®

| | |
|----------------------------|-------------------|
| MODEL | RFKCO-40-5 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 40 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |

FOR APERTO®

| | |
|----------------------------|---------------------|
| MODEL | T102497-27-5 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 27.045 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |

FOR APERTO®

| | |
|----------------------------|---------------------|
| MODEL | T102497-40-5 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 40.685 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |

FOR APERTO®

| | |
|----------------------------|-------------------|
| MODEL | T397-40-2 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 40.685 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |

Image
not
available

Image
not
available

Image
not
available

Image
not
available



FOR APERTO (SOMMER)®

| | |
|----------------------------|------------------------------------|
| MODEL | 4020-TX03-434 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 FM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR APERTO (SOMMER)®

| | |
|----------------------------|------------------------------------|
| MODEL | TX02-434-2 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 FM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR APERTO (SOMMER)®

| | |
|----------------------------|------------------------------------|
| MODEL | TX02-434-2 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 868.3 FM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR APRIMATIC®

| | |
|----------------------------|--|
| MODEL | TM |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |

Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue et MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatiblen Silca Air4-Fernbedienungen zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.

Air⁴ Residential Remotes



Air⁴ Remotes

A

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe • IB = Spain and Portugal



FOR APRIMATIC®

| | |
|----------------------------|--|
| MODEL | TR2 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR APRIMATIC®

| | |
|----------------------------|--|
| MODEL | TR4 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR APRIMATIC®

| | |
|----------------------------|--|
| MODEL | TXM |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR ATA®

| | |
|----------------------------|---------------------|
| MODEL | PTX4 BLU |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | F, V |



FOR ATA®

| | |
|----------------------------|---------------------|
| MODEL | PTX4 PINK |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | F, V |

Image
not
available

FOR ATODOR®

| | |
|----------------------------|--|
| MODEL | G4330 E |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |

Image
not
available

FOR ATODOR®

| | |
|----------------------------|--|
| MODEL | G4332 E |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |

Image
not
available

FOR ATODOR®

| | |
|----------------------------|--|
| MODEL | G4333 E |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |

Image
not
available

FOR ATODOR®

| | |
|----------------------------|--|
| MODEL | G4335 E |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |

Image
not
available

FOR ATODOR®

| | |
|----------------------------|-------------------|
| MODEL | G750 EML |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 27.145 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |

Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue et MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatiblen Silca Air4-Fernbedienungen zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiocomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.



Air4 Residential Remotes

Air₄ Remotes

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe · IB = Spain and Portugal



FOR ATTAS / DICKERT®

| | |
|----------------------------|-------------------|
| MODEL | HS DX27 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 27.015 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |




FOR AUTELCO®

| | |
|----------------------------|------------------------------------|
| MODEL | TX300 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR AUTELCO®

| | |
|----------------------------|------------------------------------|
| MODEL | EMB |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR AUTODOOR®

| | |
|----------------------------|-------------------|
| MODEL | 1A4443-2 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 27.045 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |

Image
not
available



FOR AVIDSEN®

| | |
|----------------------------|---|
| MODEL | 104250 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | L (IB), F, V, V PLUS (EU), V PLUS (IB) |



FOR AVIDSEN®

| | |
|----------------------------|---|
| MODEL | 104250 OLD2 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | L (IB), F, V, V PLUS (EU), V PLUS (IB) |



FOR AVIDSEN®

| | |
|----------------------------|---|
| MODEL | 104250 RED |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | L (IB), F, V, V PLUS (EU), V PLUS (IB) |



FOR AVIDSEN®

| | |
|----------------------------|---|
| MODEL | 104251 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | L (IB), F, V, V PLUS (EU), V PLUS (IB) |



FOR AVIDSEN®

| | |
|----------------------------|---|
| MODEL | 104257 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | L (IB), F, V, V PLUS (EU), V PLUS (IB) |

Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue e MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatiblen Silca Air4-Fernbedienungen zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiocomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.

Air⁴ Residential Remotes



Air⁴ Remotes

A

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe • IB = Spain and Portugal



FOR AVIDSEN®

| | |
|----------------------------|---|
| MODEL | 104350 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | L (IB), F, V, V PLUS (EU), V PLUS (IB) |



FOR AVIDSEN®

| | |
|----------------------------|---|
| MODEL | 654250 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | L (IB), F, V, V PLUS (EU), V PLUS (IB) |



FOR B&B®

| | |
|----------------------------|--|
| MODEL | EMY N |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR B&B®

| | |
|----------------------------|-------------------|
| MODEL | QTE |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 30.875 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR B&D®

| | |
|----------------------------|--|
| MODEL | 62170 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR B&D®

| | |
|----------------------------|--|
| MODEL | PTX4 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR BALLAN®

| | |
|----------------------------|-----------------------|
| MODEL | FM402 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 FM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | V, V PLUS (EU) |



FOR BALLAN®

| | |
|----------------------------|-----------------------|
| MODEL | FM402E |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 FM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | V, V PLUS (EU) |



FOR BALLAN®

| | |
|----------------------------|-----------------------|
| MODEL | FM404 (FM) |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 FM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | V, V PLUS (EU) |



FOR BALLAN®

| | |
|----------------------------|-----------------------|
| MODEL | FM404B |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 FM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | V, V PLUS (EU) |

Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue et MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatiblen Silca Air4-Fernbedienungen zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiocomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.



Air4 Residential Remotes

B

Air₄ Remotes

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe • IB = Spain and Portugal



FOR BALLAN®

| | |
|----------------------------|-----------------------|
| MODEL | FM404E |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 FM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | V, V PLUS (EU) |

Image
not
available

FOR BECKER®

| | |
|----------------------------|------------------------|
| MODEL | 4K MINI OR MAXI |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 40.685 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |

Image
not
available

FOR BECKER®

| | |
|----------------------------|-------------------|
| MODEL | K |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 40.685 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |

Image
not
available



FOR BECKER®

| | |
|----------------------------|-------------------|
| MODEL | 4K |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 40.685 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |

FOR BECKER®

| | |
|----------------------------|-------------------|
| MODEL | K |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 27.015 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR BECKER®

| | |
|----------------------------|-------------------|
| MODEL | MAXI |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 40.685 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR BECKER®

| | |
|----------------------------|-------------------|
| MODEL | MINI |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 40.685 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR BELFOX®

| | |
|----------------------------|-------------------|
| MODEL | 712 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 27.015 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR BELFOX®

| | |
|----------------------------|-------------------|
| MODEL | 712 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 40.685 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |

Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue et MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatiblen Silca Air4-Fernbedienungen zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiocomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.

Air⁴ Residential Remotes



Air⁴ Remotes

B

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe • IB = Spain and Portugal



| FOR BELFOX® | |
|----------------------------|-------------------|
| MODEL | 713 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 27.015 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



| FOR BELFOX® | |
|----------------------------|-------------------|
| MODEL | 723 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 40.685 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |

Image
not
available

| FOR BELFOX® | |
|----------------------------|-------------------|
| MODEL | 733 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 27.015 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |

Image
not
available

| FOR BELFOX® | |
|----------------------------|-------------------|
| MODEL | 735 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 27.015 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |

Image
not
available

| FOR BELFOX® | |
|----------------------------|-------------------|
| MODEL | 743 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 40.685 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |

Image
not
available

| FOR BELFOX® | |
|----------------------------|-------------------|
| MODEL | 745 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 40.685 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



| FOR BELFOX® | |
|----------------------------|--|
| MODEL | 773 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



| FOR BELFOX® | |
|----------------------------|------------------------------------|
| MODEL | 783 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 868.3 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



| FOR BELFOX® | |
|----------------------------|------------------------------------|
| MODEL | 7834-MINI |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 868.3 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



| FOR BELFOX® | |
|----------------------------|-------------------|
| MODEL | DHS 7 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 40.685 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |

Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue et MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatiblen Silca Air4-Fernbedienungen zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiocomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.



Air4 Residential Remotes

B Air₄ Remotes

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe · IB = Spain and Portugal



| FOR BELFOX® | |
|----------------------------|------------|
| MODEL | DHS 7 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 27.015 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



| FOR BELFOX® | |
|----------------------------|---|
| MODEL | DHS 7 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



| FOR BELFOX® | |
|----------------------------|------------|
| MODEL | DX |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 27.015 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



| FOR BELFOX® | |
|----------------------------|------------|
| MODEL | DX |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 40.685 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



| FOR BENINCA® | |
|----------------------------|---|
| MODEL | APPLE |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



| FOR BENINCA® | |
|----------------------------|---|
| MODEL | CUPIDO 2/4 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



| FOR BENINCA® | |
|----------------------------|---|
| MODEL | 10.2WV BLUE |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



| FOR BENINCA® | |
|----------------------------|---|
| MODEL | 10.2WV ORANGE |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



| FOR BENINCA® | |
|----------------------------|-----------------------------|
| MODEL | LOT A |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



| FOR BENINCA® | |
|----------------------------|------------|
| MODEL | LOT E |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 30.875 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |

Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue et MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatiblen Silca Air4-Fernbedienungen zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiocomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.

Air⁴ Residential Remotes



Air⁴ Remotes

B

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe • IB = Spain and Portugal



FOR BENINCA®

| | |
|----------------------------|--|
| MODEL | LOT W |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR BENINCA®

| | |
|----------------------------|--|
| MODEL | LOT WMS |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR BENINCA®

| | |
|----------------------------|------------------------------------|
| MODEL | LOT X |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR BENINCA®

| | |
|----------------------------|------------------------------------|
| MODEL | LOT XPS |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR BENINCA®

| | |
|----------------------------|--|
| MODEL | LOT XW |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR BENINCA®

| | |
|----------------------------|--|
| MODEL | LOT2WCV |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR BENINCA®

| | |
|----------------------------|--|
| MODEL | ROLLKEY |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR BENINCA®

| | |
|----------------------------|--|
| MODEL | T4 WV |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR BENINCA®

| | |
|----------------------------|--|
| MODEL | TO.G02 WV |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR BENINCA®

| | |
|----------------------------|--|
| MODEL | TO.G04 WV |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |

Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue et MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatiblen Silca Air4-Fernbedienungen zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiocomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.



Air4 Residential Remotes

B

Air₄ Remotes

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe • IB = Spain and Portugal



| FOR BENINCA® | |
|----------------------------|------------------------------------|
| MODEL | TO.GOQV |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 868.5 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



| FOR BENINCA® | |
|----------------------------|--|
| MODEL | TO.GOWP |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



| FOR BENINCA® | |
|----------------------------|--|
| MODEL | TW4 K |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



| FOR BENINCA® | |
|----------------------------|-------------------|
| MODEL | TX4 BLUE |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 30.875 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |

Image
not
available

| FOR BERNAL® | |
|----------------------------|-------------------|
| MODEL | 36527 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 27.015 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



| FOR BERNAL® | |
|----------------------------|-------------------|
| MODEL | BE27L |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 27.015 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |

Image
not
available

| FOR BERNAL® | |
|----------------------------|-------------------|
| MODEL | BS40L |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 40.685 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |

Image
not
available

| FOR BERNAL® | |
|----------------------------|------------------------------------|
| MODEL | RCBE |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 868.3 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |

Image
not
available

| FOR BERNAL® | |
|----------------------------|-------------------|
| MODEL | S521 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 40.685 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



| FOR BERNAL® | |
|----------------------------|-------------------|
| MODEL | SERIE N |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 27.015 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |

Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue et MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatiblen Silca Air4-Fernbedienungen zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiocomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.

Air⁴ Residential Remotes



Air⁴ Remotes

B

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe • IB = Spain and Portugal

Image
not
available

FOR BERNAL®

| | |
|----------------------------|--|
| MODEL | SKJ |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |

Image
not
available

FOR BERNAL®

| | |
|----------------------------|--|
| MODEL | SKX MD |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |

Image
not
available

FOR BERNER TORANTRIEBE®

| | |
|----------------------------|-------------------|
| MODEL | S27L |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 27.015 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR BERNER TORANTRIEBE®

| | |
|----------------------------|-------------------|
| MODEL | S40L |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 40.685 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR BERNER TORANTRIEBE®

| | |
|----------------------------|--|
| MODEL | SKX MD |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR BFT®

| | |
|----------------------------|--|
| MODEL | KLEIO |
| ROLLING TYPE | ROLLING SECURE LEARNING |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |




FOR BFT®

| | |
|----------------------------|--|
| MODEL | MITTO 2/4A |
| ROLLING TYPE | ROLLING SECURE LEARNING |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR BFT®

| | |
|----------------------------|--|
| MODEL | MITTO 2 |
| ROLLING TYPE | ROLLING SECURE LEARNING |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue et MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatiblen Silca Air4-Fernbedienungen zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiocomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.



Air4 Residential Remotes

B Air₄ Remotes

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe · IB = Spain and Portugal



| FOR BFT® | |
|----------------------------|--|
| MODEL | MITTO 4 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



| FOR BFT® | |
|----------------------------|--|
| MODEL | MITTO RCB02 |
| ROLLING TYPE | ROLLING SECURE LEARNING |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



| FOR BFT® | |
|----------------------------|--|
| MODEL | MITTO RCB04 |
| ROLLING TYPE | ROLLING SECURE LEARNING |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



| FOR BFT® | |
|----------------------------|--|
| MODEL | RB MURALE |
| ROLLING TYPE | ROLLING SECURE LEARNING |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



| FOR BFT® | |
|----------------------------|--|
| MODEL | TE01 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



| FOR BFT® | |
|----------------------------|------------------------------------|
| MODEL | TE02 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.2 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



| FOR BFT® | |
|----------------------------|--|
| MODEL | TE04 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



| FOR BFT® | |
|----------------------------|------------------------------------|
| MODEL | TFQ |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



| FOR BFT® | |
|----------------------------|-------------------|
| MODEL | TO |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 30.875 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



| FOR BFT® | |
|----------------------------|--|
| MODEL | TRC 2/4 |
| ROLLING TYPE | ROLLING SECURE LEARNING |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |

Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue et MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatiblen Silca Air4-Fernbedienungen zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.

Air⁴ Residential Remotes



Air⁴ Remotes

B

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe • IB = Spain and Portugal



| FOR BFT® | |
|----------------------------|------------------------------------|
| MODEL | TX2 306 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



| FOR BFT® | |
|----------------------------|-------------------|
| MODEL | TZSP |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 30.155 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



| FOR BFT® | |
|----------------------------|------------------------------------|
| MODEL | VTM |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



| FOR CAME® | |
|----------------------------|-------------------|
| MODEL | MT |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 30.9 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | Q |



| FOR CAME® | |
|----------------------------|-------------------|
| MODEL | TCH |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 40.685 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



| FOR CAME® | |
|----------------------------|-------------------|
| MODEL | TOP302M |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 30.9 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



| FOR CAME® | |
|----------------------------|--|
| MODEL | TOP432EV |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



| FOR CAME® | |
|----------------------------|--|
| MODEL | TOP432NA |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



| FOR CAME® | |
|----------------------------|--|
| MODEL | TOP432S |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



| FOR CAME® | |
|----------------------------|--|
| MODEL | TOP432SA |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |

Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue et MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatiblen Silca Air4-Fernbedienungen zu finden. Silca The Catalogue und MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiocomando Silca Air4 compatible. Silca The Catalogue y MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.



Air4 Residential Remotes

C Air₄ Remotes

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe · IB = Spain and Portugal



| FOR CAME® | |
|----------------------------|--|
| MODEL | TOP434A |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



| FOR CAME® | |
|----------------------------|--|
| MODEL | TOP434M |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



| FOR CAME® | |
|----------------------------|------------------------------------|
| MODEL | TOP862NA |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 868.3 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



| FOR CAME® | |
|----------------------------|--|
| MODEL | TWIN |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



| FOR CARDALE DOORS® | |
|----------------------------|--|
| MODEL | 433 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



| FOR CARDALE DOORS® | |
|----------------------------|--|
| MODEL | 433 II |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |

Image
not
available

| FOR CARDALE DOORS® | |
|----------------------------|--|
| MODEL | 433-M |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



| FOR CARDALE DOORS® | |
|----------------------------|------------------------------------|
| MODEL | 868-4C |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 868.3 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



| FOR CARDIN® | |
|----------------------------|------------------------------------|
| MODEL | S437 TX |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 FM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



| FOR CARDIN® | |
|----------------------------|--|
| MODEL | S438 TX |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |

Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue et MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatiblen Silca Air4-Fernbedienungen zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiocomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.

Air⁴ Residential Remotes



C



Air⁴ Remotes

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe • IB = Spain and Portugal



FOR CARDIN®

| | |
|----------------------------|------------------------------------|
| MODEL | S449 QZ1 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 FM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR CARDIN®

| | |
|----------------------------|------------------------------------|
| MODEL | S449 QZ2 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 FM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR CARDIN®

| | |
|----------------------------|------------------------------------|
| MODEL | S449 QZ3 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 FM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR CARDIN®

| | |
|----------------------------|------------------------------------|
| MODEL | S449 QZ4 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 FM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR CARDIN®

| | |
|----------------------------|-------------------|
| MODEL | S466 PROG |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 27.195 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR CARDIN®

| | |
|----------------------------|-------------------|
| MODEL | S466 TX |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 27.195 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR CARDIN®

| | |
|----------------------------|---------------------|
| MODEL | S466 TX29875 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 29.875 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR CARDIN®

| | |
|----------------------------|-------------------|
| MODEL | S466 TX4 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 27.195 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR CARDIN®

| | |
|----------------------------|------------------------------------|
| MODEL | S486 QZ1 OLD |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 868.3 FM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR CARDIN®

| | |
|----------------------------|------------------------------------|
| MODEL | S486 QZ2 OLD |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 868.3 FM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |

Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue et MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatiblen Silca Air4-Fernbedienungen zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiocomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.



Air4 Residential Remotes

C Air₄ Remotes

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe · IB = Spain and Portugal



FOR CARDIN®

| | |
|----------------------------|------------------------------------|
| MODEL | S486 QZ3 OLD |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 868.3 FM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR CARDIN®

| | |
|----------------------------|-------------------|
| MODEL | S738 TX |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 30.875 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR CARDIN®

| | |
|----------------------------|------------------------------------|
| MODEL | TXQ 486 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 868.3 FM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR CARDIN®

| | |
|----------------------------|------------------------------------|
| MODEL | TXQ S449 GREEN |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 FM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR CASALI®

| | |
|----------------------------|------------------------------------|
| MODEL | JA332 AMIGO 868 |
| ROLLING TYPE | ROLLING SECURE LEARNING |
| FREQUENCY | 868.3 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR CARDIN®

| | |
|----------------------------|------------------------------------|
| MODEL | S486 QZ4 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 868.3 FM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR CARDIN®

| | |
|----------------------------|---------------------|
| MODEL | S738 TX27195 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 27.195 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR CARDIN®

| | |
|----------------------------|------------------------------------|
| MODEL | TXQ 486 NEW |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 868.3 FM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR CASALI®

| | |
|----------------------------|--------------------------|
| MODEL | 433RC A252 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | F, V, V PLUS (EU) |



FOR CASALI®

| | |
|----------------------------|--|
| MODEL | BE HAPPY S 1P |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |

Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue et MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatiblen Silca Air4-Fernbedienungen zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiocomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.

Air⁴ Residential Remotes



Air⁴ Remotes

C

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe • IB = Spain and Portugal



FOR CASIT®

| | |
|----------------------------|--|
| MODEL | BE HAPPY S 2P |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR CASIT®

| | |
|----------------------------|--|
| MODEL | BE HAPPY S 3P |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR CASIT®

| | |
|----------------------------|--|
| MODEL | BE HAPPY S AZUL 1P |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR CASIT®

| | |
|----------------------------|--|
| MODEL | BE HAPPY S AZUL 2P |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR CASIT®

| | |
|----------------------------|--|
| MODEL | BE HAPPY S AZUL 3P |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR CASIT®

| | |
|----------------------------|--|
| MODEL | ERTS4C |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR CASIT®

| | |
|----------------------------|---------------------------------------|
| MODEL | MPSTFRC |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | F, V, V PLUS (EU), V PLUS (IB) |



FOR CASIT®

| | |
|----------------------------|---------------------------------------|
| MODEL | MTE |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | F, V, V PLUS (EU), V PLUS (IB) |



FOR CASIT®

| | |
|----------------------------|---------------------------------------|
| MODEL | VTM |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | F, V, V PLUS (EU), V PLUS (IB) |



FOR CDS®

| | |
|----------------------------|-------------------|
| MODEL | 801016F27 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 40.685 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |

Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue et MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatiblen Silca Air4-Fernbedienungen zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiocomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.



Air4 Residential Remotes

C Air₄ Remotes

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe • IB = Spain and Portugal



| FOR CDS® | |
|----------------------------|-------------------|
| MODEL | 807117D |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 40.685 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



| FOR CELINSA® | |
|----------------------------|-------------------|
| MODEL | AK |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 30.035 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



| FOR CELINSA® | |
|----------------------------|-------------------|
| MODEL | AK-B |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 30.035 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



| FOR CELINSA® | |
|----------------------------|-------------------|
| MODEL | AK-C |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 30.035 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



| FOR CELINSA® | |
|----------------------------|-------------------|
| MODEL | AK-D |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 30.035 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



| FOR CELINSA® | |
|----------------------------|-------------------|
| MODEL | AK-G |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 30.035 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



| FOR CELINSA® | |
|----------------------------|-------------------|
| MODEL | AK-L |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 30.035 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



| FOR CELINSA® | |
|----------------------------|-------------------|
| MODEL | AK-P |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 30.035 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



| FOR CELINSA® | |
|----------------------------|------------------------------------|
| MODEL | C-2 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



| FOR CELINSA® | |
|----------------------------|------------------------------------|
| MODEL | DR-2 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 440 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |

Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue et MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatiblen Silca Air4-Fernbedienungen zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.

Air⁴ Residential Remotes



Air⁴ Remotes

C

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe • IB = Spain and Portugal



FOR CELINSA®

| | |
|----------------------------|--|
| MODEL | DW-2 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR CELINSA®

| | |
|----------------------------|-------------------|
| MODEL | EK |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 29.91 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR CELINSA®

| | |
|----------------------------|-------------------|
| MODEL | K |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 29.99 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR CELINSA®

| | |
|----------------------------|-------------------|
| MODEL | K-B |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 29.99 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR CELINSA®

| | |
|----------------------------|-------------------|
| MODEL | KG |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 29.99 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR CELINSA®

| | |
|----------------------------|------------------------------------|
| MODEL | ME-B |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR CELINSA®

| | |
|----------------------------|------------------------------------|
| MODEL | ME-B |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 29.99 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR CELINSA®

| | |
|----------------------------|-------------------|
| MODEL | MK |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 29.99 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR CELINSA®

| | |
|----------------------------|---|
| MODEL | MOVICODE |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L (IB), L2, F, V, V PLUS (IB) |



FOR CELINSA®

| | |
|----------------------------|--|
| MODEL | RW-2 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |

Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue et MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatiblen Silca Air4-Fernbedienungen zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiocomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.



Air4 Residential Remotes

C Air₄ Remotes

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe • IB = Spain and Portugal



FOR CELINSA®

| | |
|----------------------------|--|
| MODEL | SAW |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR CELINSA®

| | |
|----------------------------|------------------------------------|
| MODEL | SE |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR CELINSA®

| | |
|----------------------------|------------------------------------|
| MODEL | SE-1 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR CELINSA®

| | |
|----------------------------|------------------------------------|
| MODEL | SE-1B |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR CELINSA®

| | |
|----------------------------|------------------------------------|
| MODEL | SE-B |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR CELINSA®

| | |
|----------------------------|---|
| MODEL | X-2 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L (IB), L2, F, V, V PLUS (IB) |



FOR CELINSA®

| | |
|----------------------------|-----------------------|
| MODEL | Z-2 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 868.3 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | V, V PLUS (IB) |



FOR CHAMBERLAIN/LIFT MASTER/MOTOR LIFT®

| | |
|----------------------------|--------------------------|
| MODEL | 132B2372 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | F, V, V PLUS (IB) |



FOR CHAMBERLAIN/LIFT MASTER/MOTOR LIFT®

| | |
|----------------------------|--------------------------|
| MODEL | 1A5477 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | F, V, V PLUS (IB) |



FOR CHAMBERLAIN/LIFT MASTER/MOTOR LIFT®

| | |
|----------------------------|--------------------------|
| MODEL | 1A5639-7 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | F, V, V PLUS (IB) |

Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue et MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatiblen Silca Air4-Fernbedienungen zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.

Air⁴ Residential Remotes



Air⁴ Remotes

C

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe • IB = Spain and Portugal




| FOR CHAMBERLAIN/LIFT MASTER/MOTOR LIFT® | |
|---|--------------------------|
| MODEL | 1A6487 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | F, V, V PLUS (IB) |



| FOR CHAMBERLAIN/LIFT MASTER/MOTOR LIFT® | |
|---|-----------------------|
| MODEL | 371 LM |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | V, V PLUS (IB) |



| FOR CHAMBERLAIN/LIFT MASTER/MOTOR LIFT® | |
|---|--|
| MODEL | 433EML |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



| FOR CHAMBERLAIN/LIFT MASTER/MOTOR LIFT® | |
|---|--|
| MODEL | 433EML |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



| FOR CHAMBERLAIN/LIFT MASTER/MOTOR LIFT® | |
|---|--------------------------|
| MODEL | 84330E |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | F, V, V PLUS (IB) |



| FOR CHAMBERLAIN/LIFT MASTER/MOTOR LIFT® | |
|---|-----------------------------------|
| MODEL | 84330EML/84333EML/84335EML |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | F, V, V PLUS (IB) |



| FOR CHAMBERLAIN/LIFT MASTER/MOTOR LIFT® | |
|---|--------------------------|
| MODEL | 8747EML |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | F, V, V PLUS (IB) |



| FOR CHAMBERLAIN/LIFT MASTER/MOTOR LIFT® | |
|---|-----------------------------------|
| MODEL | 94330EML/94333EML/94335EML |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | F, V, V PLUS (IB) |



| FOR CHAMBERLAIN/LIFT MASTER/MOTOR LIFT® | |
|---|--------------------------|
| MODEL | 94334CE |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | F, V, V PLUS (IB) |



| FOR CHAMBERLAIN/LIFT MASTER/MOTOR LIFT® | |
|---|--------------------------|
| MODEL | 94334E |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | F, V, V PLUS (IB) |

Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue et MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatiblen Silca Air4-Fernbedienungen zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiocomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.



Air4 Residential Remotes

C Air₄ Remotes

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe • IB = Spain and Portugal



| FOR CHAMBERLAIN/LIFT MASTER/MOTOR LIFT® | |
|---|--------------------------|
| MODEL | 94335E |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | F, V, V PLUS (IB) |



| FOR CHAMBERLAIN/LIFT MASTER/MOTOR LIFT® | |
|---|-----------------------|
| MODEL | 953ESTD |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | V, V PLUS (IB) |



| FOR CHAMBERLAIN/LIFT MASTER/MOTOR LIFT® | |
|---|-----------------------|
| MODEL | 953ESTD |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | V, V PLUS (IB) |



| FOR CHAMBERLAIN/LIFT MASTER/MOTOR LIFT® | |
|---|-----------------------|
| MODEL | 953ESTD |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | V, V PLUS (IB) |



| FOR CHAMBERLAIN/LIFT MASTER/MOTOR LIFT® | |
|---|-----------------------|
| MODEL | 971 LM |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | V, V PLUS (IB) |



| FOR CHAMBERLAIN/LIFT MASTER/MOTOR LIFT® | |
|---|--------------------------|
| MODEL | 974TE |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | F, V, V PLUS (IB) |



| FOR CHAMBERLAIN/LIFT MASTER/MOTOR LIFT® | |
|---|--|
| MODEL | G4330E |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



| FOR CIMESA® | |
|----------------------------|------------------------------------|
| MODEL | EM |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



| FOR CLEMSA® | |
|----------------------------|------------------------------------|
| MODEL | D |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



| FOR CLEMSA® | |
|----------------------------|--|
| MODEL | DIGICODE MH |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |

Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue e MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatiblen Silca Air4-Fernbedienungen zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.

Air⁴ Residential Remotes



Air⁴ Remotes

C

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe • IB = Spain and Portugal



FOR CLEMSA®

| | |
|----------------------------|------------------------------------|
| MODEL | E |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR CLEMSA®

| | |
|----------------------------|------------------------------------|
| MODEL | E-300 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR CLEMSA®

| | |
|----------------------------|------------------------------------|
| MODEL | E-600 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR CLEMSA®

| | |
|----------------------------|-----------------------|
| MODEL | E-CODE N |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 868.3 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | V, V PLUS (IB) |



FOR CLEMSA®

| | |
|----------------------------|-----------------------|
| MODEL | E20 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | V, V PLUS (IB) |



FOR CLEMSA®

| | |
|----------------------------|------------------------------------|
| MODEL | EM |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR CLEMSA®

| | |
|----------------------------|-------------------|
| MODEL | F/C |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 30.035 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR CLEMSA®

| | |
|----------------------------|------------------------------------|
| MODEL | FA |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR CLEMSA®

| | |
|----------------------------|------------------------------------|
| MODEL | M-60 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR CLEMSA®

| | |
|----------------------------|----------------------------------|
| MODEL | MASTERCODE |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | L (IB), F, V, V PLUS (IB) |

Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue et MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatiblen Silca Air4-Fernbedienungen zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiocomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.



Air4 Residential Remotes

C Air₄ Remotes

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe · IB = Spain and Portugal



| FOR CLEMSA® | |
|----------------------------|---|
| MODEL | MH |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



| FOR CLEMSA® | |
|----------------------------|---|
| MODEL | MH-E |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



| FOR CLEMSA® | |
|----------------------------|-----------------------------|
| MODEL | MT |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



| FOR CLEMSA® | |
|----------------------------|-----------------------------|
| MODEL | MT-X |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



| FOR CLEMSA® | |
|----------------------------|-----------------------------|
| MODEL | MT-Y |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



| FOR CLEMSA® | |
|----------------------------|-----------------------------|
| MODEL | MT-Z |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



| FOR CLEMSA® | |
|----------------------------|---------------------------|
| MODEL | MUTANCODE T2 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | L (IB), F, V, V PLUS (IB) |



| FOR CLEMSA® | |
|----------------------------|---------------------------|
| MODEL | T |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | L (IB), F, V, V PLUS (IB) |



| FOR CLEMSA® | |
|----------------------------|----------------|
| MODEL | T-8 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 868.3 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | V, V PLUS (IB) |



| FOR CLEMSA® | |
|----------------------------|------------|
| MODEL | TX-K |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 30.035 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |

Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue e MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatiblen Silca Air4-Fernbedienungen zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiocomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.

Air⁴ Residential Remotes



Air⁴ Remotes

C

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe • IB = Spain and Portugal



FOR CLEMSA®

| | |
|----------------------------|-------------------|
| MODEL | TX-L |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 30.035 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR CLEMSA®

| | |
|----------------------------|-------------------|
| MODEL | TX-M |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 30.035 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR CLEMSA®

| | |
|----------------------------|-------------------|
| MODEL | TX-ML |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 29.99 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR CLEMSA®

| | |
|----------------------------|-------------------|
| MODEL | TX-P |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 30.035 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR CYACSA®

| | |
|----------------------------|-----------------------|
| MODEL | MINI GO |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 868.3 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | V, V PLUS (IB) |



FOR CYACSA®

| | |
|----------------------------|---|
| MODEL | NEO |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | L, L (IB), L2, F, V, V PLUS (IB) |



FOR CYACSA®

| | |
|----------------------------|---|
| MODEL | TWIN |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | L, L (IB), L2, F, V, V PLUS (IB) |



FOR DASPI®

| | |
|----------------------------|--|
| MODEL | ZERO 2 RC |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR DASPI®

| | |
|----------------------------|--|
| MODEL | ZERO 4 RC |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR DEA SYSTEM®

| | |
|----------------------------|------------------------------------|
| MODEL | 306 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |

Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue et MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatiblen Silca Air4-Fernbedienungen zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiocomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.



Air4 Residential Remotes

D Air₄ Remotes

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe · IB = Spain and Portugal



FOR DEA SYSTEM®

| | |
|----------------------------|-------------------|
| MODEL | DEA31 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 30.875 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR DEA SYSTEM®

| | |
|----------------------------|--|
| MODEL | GENIE R 273 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR DEA SYSTEM®

| | |
|----------------------------|--|
| MODEL | GENIE S |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR DEA SYSTEM®

| | |
|----------------------------|--|
| MODEL | GENIE S 263L |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR DEA SYSTEM®

| | |
|----------------------------|--|
| MODEL | GOLD 238 S1 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR DEA SYSTEM®

| | |
|----------------------------|--|
| MODEL | GOLD 238 S2 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR DEA SYSTEM®

| | |
|----------------------------|--|
| MODEL | GOLD 239 S4 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR DEA SYSTEM®

| | |
|----------------------------|------------------------------------|
| MODEL | GOLD 306 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR DEA SYSTEM®

| | |
|----------------------------|--|
| MODEL | GOLD R |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR DEA SYSTEM®

| | |
|----------------------------|--|
| MODEL | MIO TD |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |

Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue et MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatiblen Silca Air4-Fernbedienung zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.

Air⁴ Residential Remotes



Air⁴ Remotes

D

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe • IB = Spain and Portugal



FOR DEA SYSTEM®

| | |
|----------------------------|--|
| MODEL | PUNTO 268 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR DEA SYSTEM®

| | |
|----------------------------|--|
| MODEL | PUNTO 278 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR DEA SYSTEM®

| | |
|----------------------------|--|
| MODEL | TR2/4 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR DELMA®

| | |
|----------------------------|------------------------------------|
| MODEL | APOLLO-300-4 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR DELMA®

| | |
|----------------------------|--|
| MODEL | APOLLO-433-4 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR DELMA®

| | |
|----------------------------|--|
| MODEL | APOLLO-433-4 NEW |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR DELMA®

| | |
|----------------------------|-------------------|
| MODEL | KING-40 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 40.685 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR DELMA®

| | |
|----------------------------|--|
| MODEL | KING-433 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR DELMA®

| | |
|----------------------------|------------------------------------|
| MODEL | MIZ-300 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR DELMA®

| | |
|----------------------------|--|
| MODEL | MIZ-433 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |

Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue et MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatiblen Silca Air4-Fernbedienungen zu finden. Silca The Catalogue und MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiocomando Silca Air4 compatible. Silca The Catalogue y MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.



Air4 Residential Remotes

D Air₄ Remotes

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe • IB = Spain and Portugal



FOR DETUMANDO®

| | |
|----------------------------|----------------------------------|
| MODEL | DTM ROLL |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | L (IB), F, V, V PLUS (IB) |



FOR DICKERT®

| | |
|----------------------------|-------------------|
| MODEL | AHS27 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 27.015 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR DICKERT®

| | |
|----------------------------|-------------------|
| MODEL | AHS40 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 40.685 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR DICKERT®

| | |
|----------------------------|-------------------|
| MODEL | DX27 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 27.015 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR DICKERT®

| | |
|----------------------------|-------------------|
| MODEL | DX40 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 40.685 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR DICKERT®

| | |
|----------------------------|-------------------|
| MODEL | FHS10-B |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 40.685 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR DICKERT®

| | |
|----------------------------|------------------------------------|
| MODEL | HS-868 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 868.3 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR DICKERT®

| | |
|----------------------------|------------------------------------|
| MODEL | HS-868 GREY |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 868.3 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR DICKERT®

| | |
|----------------------------|-------------------|
| MODEL | IAMS 40 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 40.685 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR DICKERT®

| | |
|----------------------------|--|
| MODEL | IAMS 433 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |

Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue et MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatiblen Silca Air4-Fernbedienungen zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiocomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.

Air⁴ Residential Remotes



Air⁴ Remotes

D

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe • IB = Spain and Portugal

FOR DICKERT®

| | |
|----------------------------|-------------------|
| MODEL | IFMS20 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 40.685 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



Image
not
available

FOR DICKERT®

| | |
|----------------------------|------------------------------------|
| MODEL | IS-868 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 868.3 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |

Image
not
available



FOR DICKERT®

| | |
|----------------------------|-------------------|
| MODEL | MAHS40 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 40.685 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR DICKERT®

| | |
|----------------------------|--|
| MODEL | S10 -433-AL |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR DICKERT®

| | |
|----------------------------|--|
| MODEL | S10 AL |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR DICKERT®

| | |
|----------------------------|--|
| MODEL | S20-433-AL |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue et MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatiblen Silca Air4-Fernbedienungen zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiocomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.



Air4 Residential Remotes

D Air₄ Remotes

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe • IB = Spain and Portugal



FOR DICKERT®

| | |
|----------------------------|------------------------------------|
| MODEL | S20-868-AL |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 868.3 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR DICKERT®

| | |
|----------------------------|------------------------------------|
| MODEL | S5-868-AL |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 868.3 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR DITEC®

| | |
|----------------------------|---------------------------------------|
| MODEL | BIX LP2 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | F, V, V PLUS (EU), V PLUS (IB) |



FOR DITEC®

| | |
|----------------------------|---------------------------------------|
| MODEL | GOL4 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | F, V, V PLUS (EU), V PLUS (IB) |



FOR DICKERT®

| | |
|----------------------------|--|
| MODEL | S5-433-AL |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR DITEC®

| | |
|----------------------------|---------------------------------------|
| MODEL | BIX LG4 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | F, V, V PLUS (EU), V PLUS (IB) |



FOR DITEC®

| | |
|----------------------------|--|
| MODEL | BIX LS2 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR DITEC®

| | |
|----------------------------|--|
| MODEL | GOL4C |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR DMIL®

| | |
|----------------------------|-----------------------|
| MODEL | GO |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 868.3 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | V, V PLUS (IB) |



FOR DMIL®

| | |
|----------------------------|---|
| MODEL | NEO10 DMIL |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L (IB), L2, F, V, V PLUS (IB) |

Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue et MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatiblen Silca Air4-Fernbedienungen zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiocomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.

Air⁴ Residential Remotes



Air⁴ Remotes

D

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe • IB = Spain and Portugal



FOR DMIL®

| | |
|----------------------------|---|
| MODEL | TWIN |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L (IB), L2, F, V, V PLUS (IB) |



FOR DOORHAN®

| | |
|----------------------------|--------------------------|
| MODEL | TRANSMITTER 2 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | F, V, V PLUS (EU) |



FOR DOORHAN®

| | |
|----------------------------|--------------------------|
| MODEL | TRANSMITTER 4 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | F, V, V PLUS (EU) |



FOR DOORMATIC®

| | |
|----------------------------|------------------------------------|
| MODEL | AM-300 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR DOORMATIC®

| | |
|----------------------------|--|
| MODEL | AZ-433 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR DOORMATIC®

| | |
|----------------------------|--|
| MODEL | EURO |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR DOORMATIC®

| | |
|----------------------------|-------------------------------|
| MODEL | MILENY |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L (IB), V, V PLUS (IB) |



FOR DORMA®

| | |
|----------------------------|-------------------|
| MODEL | MS41-2 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 40.685 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR DORMA®

| | |
|----------------------------|-------------------|
| MODEL | S41-1 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 40.685 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR DUCATI®

| | |
|----------------------------|--|
| MODEL | TE2 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |

Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue et MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatiblen Silca Air4-Fernbedienungen zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiocomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.



Air4 Residential Remotes

D Air₄ Remotes

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe • IB = Spain and Portugal



FOR DUCATI®

| | |
|----------------------------|--|
| MODEL | TPR |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR DUCATI®

| | |
|----------------------------|--|
| MODEL | TSAW |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR E-KING®

| | |
|----------------------------|--|
| MODEL | 433 II |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR E-KING®

| | |
|----------------------------|------------------------------------|
| MODEL | 868-4C |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 868.3 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR DUCATI®

| | |
|----------------------------|--|
| MODEL | 433 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR E-KING®

| | |
|----------------------------|--|
| MODEL | 433-M |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |

Image
not
available

Image
not
available



FOR E-KING®

| | |
|----------------------------|------------------------------------|
| MODEL | TX433 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 FM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |

Image
not
available



FOR ECE®

| | |
|----------------------------|--|
| MODEL | 433 TX4 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |

Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue et MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatiblen Silca Air4-Fernbedienung zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiocomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.

Air⁴ Residential Remotes



Air⁴ Remotes

E

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe • IB = Spain and Portugal



| FOR ECE® | |
|----------------------------|--|
| MODEL | ECE 433 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



| FOR ECOSTAR® | |
|----------------------------|--|
| MODEL | 40 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



| FOR ECOSTAR® | |
|----------------------------|-------------------|
| MODEL | ECOSTAR |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 40.685 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



| FOR ECOSTAR® | |
|----------------------------|-----------------------|
| MODEL | RSC |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | V, V PLUS (EU) |



| FOR ECOSTAR® | |
|----------------------------|-----------------------|
| MODEL | RSE |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | V, V PLUS (EU) |



| FOR ECOSTAR® | |
|----------------------------|-----------------------|
| MODEL | RSZ |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | V, V PLUS (EU) |



| FOR EINHELL® | |
|----------------------------|--|
| MODEL | HS433 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



| FOR ELBE® | |
|----------------------------|--|
| MODEL | 50 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



| FOR ELEMAT® | |
|----------------------------|----------------------------------|
| MODEL | EL2 PLUS |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L (IB), F, V, V PLUS (IB) |



| FOR ELEMAT® | |
|----------------------------|-------------------|
| MODEL | K30 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 30.9 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |

Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue et MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatiblen Silca Air4-Fernbedienungen zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiocomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.



Air4 Residential Remotes

E Air₄ Remotes

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe • IB = Spain and Portugal



| FOR ELEMAT® | |
|----------------------------|----------------|
| MODEL | MINI TEC 2C |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 868.3 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | V, V PLUS (IB) |



| FOR ELEMAT® | |
|----------------------------|------------|
| MODEL | QUARTZ |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 30.035 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



| FOR ELEMAT® | |
|----------------------------|-----------------------------|
| MODEL | TRINARY |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |

Image
not
available

| FOR ELERO® | |
|----------------------------|------------|
| MODEL | RFKCO-40-5 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 40.685 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |

Image
not
available

| FOR ELERO® | |
|----------------------------|--------------|
| MODEL | T102497-40-5 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 40.685 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |

Image
not
available

| FOR ELERO® | |
|----------------------------|------------|
| MODEL | T397-40-2 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 40.685 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |

Image
not
available

| FOR ELKA® | |
|----------------------------|-----------------------------|
| MODEL | SK |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 434 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



| FOR ELKA® | |
|----------------------------|---|
| MODEL | SKX |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



| FOR ELKA® | |
|----------------------------|-----------------------------|
| MODEL | SKX1LC |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.975 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



| FOR ELKA® | |
|----------------------------|-----------------------------|
| MODEL | SKX2LC |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.975 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |

Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue e MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatiblen Silca Air4-Fernbedienungen zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiocomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.

Air⁴ Residential Remotes



Air⁴ Remotes

E

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe • IB = Spain and Portugal

Image
not
available

FOR ELKA®

| | |
|----------------------------|------------------------------------|
| MODEL | SKX3LC |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.975 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |

Image
not
available

FOR ELKA®

| | |
|----------------------------|------------------------------------|
| MODEL | SKX4LC |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.975 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR ELKA®

| | |
|----------------------------|-------------------|
| MODEL | SLX |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 40.685 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR EMFA®

| | |
|----------------------------|------------------------------------|
| MODEL | BINARY |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR ELKA®

| | |
|----------------------------|-------------------|
| MODEL | SM |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 29.985 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR EMFA®

| | |
|----------------------------|-----------------------|
| MODEL | MA0868 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 868.3 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | V, V PLUS (IB) |



FOR EMFA®

| | |
|----------------------------|---|
| MODEL | MAP433 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L (IB), L2, F, V, V PLUS (IB) |



FOR EMFA®

| | |
|----------------------------|---|
| MODEL | NEO |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L (IB), L2, F, V, V PLUS (IB) |



FOR EMFA®

| | |
|----------------------------|-------------------|
| MODEL | QUARTZ |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 30.035 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR EMFA®

| | |
|----------------------------|-----------------------|
| MODEL | TE3 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 868.3 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | V, V PLUS (IB) |

Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue et MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatiblen Silca Air4-Fernbedienungen zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiocomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.



Air4 Residential Remotes

E Air₄ Remotes

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe • IB = Spain and Portugal



| FOR EMFA® | |
|----------------------------|------------------------------------|
| MODEL | TRINARY |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



| FOR EMFA® | |
|----------------------------|---|
| MODEL | TWIN |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L (IB), L2, F, V, V PLUS (IB) |



| FOR ERONE® | |
|----------------------------|--|
| MODEL | OVALI |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



| FOR ERONE® | |
|----------------------------|------------------------|
| MODEL | OVALI QUARTZ 27 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 27.195 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



| FOR ERONE® | |
|----------------------------|------------------------|
| MODEL | OVALI QUARTZ 30 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 30.875 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



| FOR ERREKA® | |
|----------------------------|------------------------------------|
| MODEL | BARR |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



| FOR ERREKA® | |
|----------------------------|------------------------------------|
| MODEL | CEME |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



| FOR ERREKA® | |
|----------------------------|------------------------------------|
| MODEL | CLMX |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



| FOR ERREKA® | |
|----------------------------|------------------------------------|
| MODEL | BM |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



| FOR ERREKA® | |
|----------------------------|------------------------------------|
| MODEL | CLEM |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |

Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue et MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatiblen Silca Air4-Fernbedienungen zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiocomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.

Air⁴ Residential Remotes



Air⁴ Remotes

E

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe • IB = Spain and Portugal



FOR ERREKA®

| | |
|----------------------------|------------------------------------|
| MODEL | CLMY |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR ERREKA®

| | |
|----------------------------|------------------------------------|
| MODEL | CYJC |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR ERREKA®

| | |
|----------------------------|-------------------|
| MODEL | EL |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 30.035 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR ERREKA®

| | |
|----------------------------|----------------------------------|
| MODEL | IRIS 2/4 433 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L (IB), F, V, V PLUS (IB) |



FOR ERREKA®

| | |
|----------------------------|-----------------------|
| MODEL | IRIS 2/4 868 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 868.3 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | V, V PLUS (IB) |



FOR ERREKA®

| | |
|----------------------------|------------------------------------|
| MODEL | JJM |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR ERREKA®

| | |
|----------------------------|----------------------------------|
| MODEL | LIRA 433 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L (IB), F, V, V PLUS (IB) |



FOR ERREKA®

| | |
|----------------------------|----------------------------------|
| MODEL | LIRA 868 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 868.3 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L (IB), F, V, V PLUS (IB) |



FOR ERREKA®

| | |
|----------------------------|--|
| MODEL | LUNA |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR ERREKA®

| | |
|----------------------------|--|
| MODEL | LUNA |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |

Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue et MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatiblen Silca Air4-Fernbedienungen zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiocomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.



Air4 Residential Remotes

E Air₄ Remotes

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe • IB = Spain and Portugal



| FOR ERREKA® | |
|----------------------------|-----------------------------|
| MODEL | MATZ |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



| FOR ERREKA® | |
|----------------------------|-----------------------------|
| MODEL | MATZ AZUL |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



| FOR ERREKA® | |
|----------------------------|---|
| MODEL | MC |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



| FOR ERREKA® | |
|----------------------------|-----------------------------|
| MODEL | MT |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



| FOR ERREKA® | |
|----------------------------|---|
| MODEL | RESON 2 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



| FOR ERREKA® | |
|----------------------------|---|
| MODEL | RESON 4 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |




| FOR ERREKA® | |
|----------------------------|-----------------------------|
| MODEL | RLT |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



| FOR ERREKA® | |
|----------------------------|---------------------------|
| MODEL | ROLLER 2 433 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L (IB), F, V, V PLUS (IB) |



| FOR ERREKA® | |
|----------------------------|----------------|
| MODEL | ROLLER 2 868 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 868.3 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | V, V PLUS (IB) |



| FOR ERREKA® | |
|----------------------------|----------------|
| MODEL | ROLLER 4 868 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 868.3 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | V, V PLUS (IB) |

Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue e MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatiblen Silca Air4-Fernbedienungen zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.

Air⁴ Residential Remotes



Air⁴ Remotes

E

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe • IB = Spain and Portugal



FOR ERREKA®

| | |
|----------------------------|--|
| MODEL | SGOX |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR ERREKA®

| | |
|----------------------------|--|
| MODEL | SMAT |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR ERREKA®

| | |
|----------------------------|----------------------------------|
| MODEL | SOL 2R/4R 433 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L (IB), F, V, V PLUS (IB) |



FOR ERREKA®

| | |
|----------------------------|-----------------------|
| MODEL | SOL 2R/4R 868 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 868.3 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | V, V PLUS (IB) |

FOR ERREKA®

| | |
|----------------------------|------------------------------------|
| MODEL | TEMI |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |

Image
not
available

FOR ERREKA®

| | |
|----------------------------|----------------------------------|
| MODEL | VEGA 2/4 433 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L (IB), F, V, V PLUS (IB) |



FOR ERREKA®

| | |
|----------------------------|-----------------------|
| MODEL | VEGA 2/4 868 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 868.3 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | V, V PLUS (IB) |



FOR FAAC®

| | |
|----------------------------|------------------------------------|
| MODEL | 418 SL |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR FAAC®

| | |
|----------------------------|------------------------------------|
| MODEL | DL 2/4 868 SLH |
| ROLLING TYPE | ROLLING SECURE LEARNING |
| FREQUENCY | 868.3 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue et MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatible Silca Air4-Fernbedienung zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiocomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.



Air4 Residential Remotes

F Air₄ Remotes

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe • IB = Spain and Portugal



| FOR FAAC® | |
|----------------------------|-----------------------------|
| MODEL | R40 330 NEW |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



| FOR FAAC® | |
|----------------------------|-----------------------------|
| MODEL | R40 330 OLD |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



| FOR FAAC® | |
|----------------------------|------------------------------------|
| MODEL | T433 SLH |
| ROLLING TYPE | ROLLING SECURE LEARNING |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L2, F, V, V PLUS (EU), V PLUS (IB) |



| FOR FAAC® | |
|----------------------------|-----------------------------|
| MODEL | T868 SLH |
| ROLLING TYPE | ROLLING SECURE LEARNING |
| FREQUENCY | 868.3 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



| FOR FAAC® | |
|----------------------------|---|
| MODEL | TE433 HG |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



| FOR FAAC® | |
|----------------------------|-----------------------------|
| MODEL | TM 315 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



| FOR FAAC® | |
|----------------------------|-----------------------------|
| MODEL | TM1 300 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



| FOR FAAC® | |
|----------------------------|-----------------------------|
| MODEL | TM1 868 DS |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 868.4 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



| FOR FAAC® | |
|----------------------------|-----------------------------|
| MODEL | TM2 300 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



| FOR FAAC® | |
|----------------------------|-----------------------------|
| MODEL | TM2 300S |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |

Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue e MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original Modell starten, um die kompatiblen Silca Air4-Fernbedienung zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.

Air⁴ Residential Remotes



Air⁴ Remotes

F

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe • IB = Spain and Portugal



FOR FAAC®

| | |
|----------------------------|---|
| MODEL | TML 433 SLH |
| ROLLING TYPE | ROLLING SECURE LEARNING |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR FAAC®

| | |
|----------------------------|--|
| MODEL | TML4 433 SLR |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR FAAC®

| | |
|----------------------------|-------------------|
| MODEL | TMN |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 30.875 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR FAAC®

| | |
|----------------------------|--|
| MODEL | TML2 433 SLR |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR FAAC®

| | |
|----------------------------|-------------------|
| MODEL | TMN |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 30.875 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR FAAC®

| | |
|----------------------------|-------------------|
| MODEL | TMN |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 30.065 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR FAAC®

| | |
|----------------------------|---|
| MODEL | XT4 433 SLH |
| ROLLING TYPE | ROLLING SECURE LEARNING |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR FAAC®

| | |
|----------------------------|--|
| MODEL | XT4 433RC-BE |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR FAAC®

| | |
|----------------------------|------------------------------------|
| MODEL | XT4 868 SLH |
| ROLLING TYPE | ROLLING SECURE LEARNING |
| FREQUENCY | 868.3 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR FADINI®

| | |
|----------------------------|--|
| MODEL | ASTRO 433 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR FADINI®

| | |
|----------------------------|--|
| MODEL | ASTRO 433M |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |

Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue et MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatiblen Silca Air4-Fernbedienungen zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiocomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.



Air4 Residential Remotes

F Air₄ Remotes

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe • IB = Spain and Portugal



| FOR FADINI® | |
|----------------------------|---|
| MODEL | JUBI 433 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



| FOR FADINI® | |
|----------------------------|---|
| MODEL | JUBI SMALL |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



| FOR FOCEBAT® | |
|----------------------------|------------|
| MODEL | FORC 141 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 30.875 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



| FOR FADINI® | |
|----------------------------|---|
| MODEL | JUBI 433/2 TR |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



| FOR FERPORT® | |
|----------------------------|-----------------------------|
| MODEL | TAC 80 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 868.3 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |




| FOR FOCEBAT® | |
|----------------------------|------------|
| MODEL | FORC 441 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 30.875 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |




| FOR FORSA® | |
|----------------------------|---|
| MODEL | BUTTERFLY |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



| FOR FORSA® | |
|----------------------------|----------------|
| MODEL | MINI GO |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 868.3 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | V, V PLUS (IB) |



| FOR FORSA® | |
|----------------------------|------------|
| MODEL | GAMMA27 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 27.195 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



| FOR FORSA® | |
|----------------------------|---------------------------------------|
| MODEL | RT1 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L2, F, V, V PLUS (EU), V PLUS (IB) |

Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue et MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatiblen Silca Air4-Fernbedienungen zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiocomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.

Air⁴ Residential Remotes



Air⁴ Remotes

F

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe • IB = Spain and Portugal



FOR FORSA®

| | |
|----------------------------|------------------------------------|
| MODEL | RT2 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 432.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |




FOR FORSA®

| | |
|----------------------------|--|
| MODEL | RT4 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR FORSA®

| | |
|----------------------------|-------------------|
| MODEL | S27M |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 27.095 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR FORSA®

| | |
|----------------------------|-------------------|
| MODEL | STX |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 27.195 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR FORSA®

| | |
|----------------------------|------------------------------------|
| MODEL | TRIEME |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR FORSA®

| | |
|----------------------------|--|
| MODEL | TWIN |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR FORSA®

| | |
|----------------------------|------------------------------------|
| MODEL | TX26 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR FORSA®

| | |
|----------------------------|--|
| MODEL | TXE |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR GENIUS®

| | |
|----------------------------|--------------------------|
| MODEL | A252 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | F, V, V PLUS (EU) |



FOR GENIUS®

| | |
|----------------------------|------------------------------------|
| MODEL | AMIGO 868 |
| ROLLING TYPE | ROLLING SECURE LEARNING |
| FREQUENCY | 868.3 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |

Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue et MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatiblen Silca Air4-Fernbedienungen zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiocomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.



Air4 Residential Remotes

G Air₄ Remotes

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe • IB = Spain and Portugal



FOR GENIUS®

| | |
|----------------------------|------------------------------------|
| MODEL | AMIGOLD 2-4 868 |
| ROLLING TYPE | ROLLING SECURE LEARNING |
| FREQUENCY | 868.3 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR GENIUS®

| | |
|----------------------------|--|
| MODEL | ECHO |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR GENIUS®

| | |
|----------------------------|------------------------------------|
| MODEL | KILO 868 |
| ROLLING TYPE | ROLLING SECURE LEARNING |
| FREQUENCY | 868.3 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR GIBIDI®

| | |
|----------------------------|--|
| MODEL | AU1600 WOOD |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |

FOR GIBIDI®

| | |
|----------------------------|--|
| MODEL | AU1680 WOOD |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |

Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue et MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatiblen Silca Air4-Fernbedienungen zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.

Air⁴ Residential Remotes



Air⁴ Remotes

G

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe • IB = Spain and Portugal



FOR GIBIDI®

| | |
|----------------------------|--|
| MODEL | AU01590 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |

Image
not
available

FOR GIBIDI/OPEN OUT®

| | |
|----------------------------|--------------------|
| MODEL | ARM AU01530 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 30.875 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |

Image
not
available

FOR GIBIDI/OPEN OUT®

| | |
|----------------------------|--------------------|
| MODEL | ARM AU01540 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 30.875 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR GIBIDI/OPEN OUT®

| | |
|----------------------------|------------------------------------|
| MODEL | L110 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR GIBIDI/OPEN OUT®

| | |
|----------------------------|-------------------|
| MODEL | MTQ 30-8 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 30.8 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR GIBIDI/OPEN OUT®

| | |
|----------------------------|-------------------|
| MODEL | MTQ 40 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 40.685 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR GIBIDI/OPEN OUT®

| | |
|----------------------------|--|
| MODEL | TMB |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR GIBIDI/OPEN OUT®

| | |
|----------------------------|------------------------------------|
| MODEL | TSM |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |

Image
not
available

FOR GOBBATO®

| | |
|----------------------------|--|
| MODEL | RAD/B2S |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR GR®

| | |
|----------------------------|-------------------|
| MODEL | GR 30-875 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 30.875 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |

Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue et MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatiblen Silca Air4-Fernbedienungen zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiocomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.



Air4 Residential Remotes

G Air₄ Remotes

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe • IB = Spain and Portugal



| FOR GR® | |
|----------------------------|--|
| MODEL | GR 433 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



| FOR GULLIVER® | |
|----------------------------|-------------------|
| MODEL | MDRQ |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 30.875 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



| FOR GULLIVER® | |
|----------------------------|------------------------------------|
| MODEL | MDRS |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



| FOR GULLIVER® | |
|----------------------------|--|
| MODEL | MDW2 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



| FOR HORMANN® | |
|----------------------------|------------------------------------|
| MODEL | HS4 868 BS |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 868.3 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



| FOR HORMANN® | |
|----------------------------|-------------------|
| MODEL | HS40 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 40.685 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



| FOR HORMANN® | |
|----------------------------|------------------------------------|
| MODEL | HS868 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 868.3 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



| FOR HORMANN® | |
|----------------------------|------------------------------------|
| MODEL | HSE 433 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 FM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



| FOR HORMANN® | |
|----------------------------|------------------------------------|
| MODEL | HSE2 868 BS |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 868.3 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



| FOR HORMANN® | |
|----------------------------|------------------------------------|
| MODEL | HSM 433 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 FM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |

Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue et MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatiblen Silca Air4-Fernbedienungen zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.

Air⁴ Residential Remotes



Air⁴ Remotes

H

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe • IB = Spain and Portugal



| FOR HORMANN® | |
|----------------------------|------------------------------------|
| MODEL | HSM4 868 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 868.32 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



| FOR HORMANN® | |
|----------------------------|------------------------------------|
| MODEL | HSP4-868 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 868.3 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



| FOR JCM® | |
|----------------------------|------------------------------------|
| MODEL | BINARY |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



| FOR JCM® | |
|----------------------------|-----------------------|
| MODEL | CYACSA GO |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 868.3 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | V, V PLUS (IB) |



| FOR JCM® | |
|----------------------------|-----------------------|
| MODEL | DMIL GO |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 868.3 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | V, V PLUS (IB) |



| FOR JCM® | |
|----------------------------|------------------------------------|
| MODEL | EB |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



| FOR JCM® | |
|----------------------------|------------------------------------|
| MODEL | EF |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



| FOR JCM® | |
|----------------------------|------------------------------------|
| MODEL | EM |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



| FOR JCM® | |
|----------------------------|------------------------------------|
| MODEL | ET |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



| FOR JCM® | |
|----------------------------|-----------------------|
| MODEL | FORSO GO |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 868.3 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | V, V PLUS (IB) |

Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue et MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatiblen Silca Air4-Fernbedienungen zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiocomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.



Air4 Residential Remotes

J Air₄ Remotes

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe · IB = Spain and Portugal



| FOR JCM® | |
|----------------------------|-----------------------|
| MODEL | FORSA GO |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 868.3 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | V, V PLUS (IB) |



| FOR JCM® | |
|----------------------------|------------------------------------|
| MODEL | GO |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 868.3 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



| FOR JCM® | |
|----------------------------|------------------------------------|
| MODEL | GO CUBELLS |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 868.3 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



| FOR JCM® | |
|----------------------------|-----------------------|
| MODEL | GO MINI-NTN |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 868.3 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | V, V PLUS (IB) |



| FOR JCM® | |
|----------------------------|---------------------------|
| MODEL | GO-2 ANTONIO ONECA |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 868.3 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | V, V PLUS (IB) |



| FOR JCM® | |
|----------------------------|-----------------------|
| MODEL | GO2 EMFA |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 868.3 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | V, V PLUS (IB) |



| FOR JCM® | |
|----------------------------|-----------------------|
| MODEL | HYDOM GO |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 868.3 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | V, V PLUS (IB) |

Image
not
available

| FOR JCM® | |
|----------------------------|------------------------------------|
| MODEL | MINI GO2 NTN |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 868.3 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



| FOR JCM® | |
|----------------------------|---|
| MODEL | NEO DMIL |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | L, L (IB), L2, F, V, V PLUS (IB) |

Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue et MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatiblen Silca Air4-Fernbedienungen zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.

Air⁴ Residential Remotes



Air⁴ Remotes

J

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe • IB = Spain and Portugal



| FOR JCM® | |
|----------------------------|---|
| MODEL | NEO EMFA |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | L, L (IB), L2, F, V, V PLUS (IB) |



| FOR JCM® | |
|----------------------------|--|
| MODEL | NEO FORSTA |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | L, L2, F, V, V PLUS (EU), V PLUS (IB) |



| FOR JCM® | |
|----------------------------|--|
| MODEL | NEO PUYOL |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



| FOR JCM® | |
|----------------------------|--|
| MODEL | NEO SERVIPARKING |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



| FOR JCM® | |
|----------------------------|-----------------------|
| MODEL | NEO10+KOM |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 434 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | V, V PLUS (IB) |



| FOR JCM® | |
|----------------------------|--|
| MODEL | NEO20 SEC |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |

Image
not
available

| FOR JCM® | |
|----------------------------|-----------------------|
| MODEL | NORTON GO |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 868.3 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | V, V PLUS (IB) |



| FOR JCM® | |
|----------------------------|-------------------|
| MODEL | P115 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 30.035 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



| FOR JCM® | |
|----------------------------|-----------------------|
| MODEL | TECHGO2 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 868.3 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | V, V PLUS (IB) |



| FOR JCM® | |
|----------------------------|-----------------------|
| MODEL | TECHGO4 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 868.3 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | V, V PLUS (IB) |

Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue et MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatiblen Silca Air4-Fernbedienungen zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiocomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.



Air4 Residential Remotes

J Air₄ Remotes

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe • IB = Spain and Portugal



| FOR JCM® | |
|----------------------------|-----------------------------|
| MODEL | TRIEME |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



| FOR JCM® | |
|----------------------------|---|
| MODEL | TWIN |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



| FOR KEY® | |
|----------------------------|---|
| MODEL | 900SUB 44WR |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



| FOR KEY® | |
|----------------------------|---|
| MODEL | 900TXB-42R |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



| FOR KEY® | |
|----------------------------|---|
| MODEL | TXB 44R |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



| FOR KEY® | |
|----------------------------|---|
| MODEL | TXG 44R |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



| FOR KING GATES® | |
|----------------------------|--------------------------------|
| MODEL | CLIPPER |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | F, V, V PLUS (EU), V PLUS (IB) |



| FOR KING GATES® | |
|----------------------------|--------------------------------|
| MODEL | STYLO 4 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | F, V, V PLUS (EU), V PLUS (IB) |



| FOR KLING® | |
|----------------------------|-------------------|
| MODEL | KUA2 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | F, V, V PLUS (EU) |



| FOR LABEL® | |
|----------------------------|---|
| MODEL | SPYCO-1 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |

Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue et MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatiblen Silca Air4-Fernbedienungen zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiocomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.

Air⁴ Residential Remotes



Air⁴ Remotes

L

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe • IB = Spain and Portugal



| FOR LABEL® | |
|----------------------------|--|
| MODEL | SPYCO-3 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



| FOR LEB® | |
|----------------------------|--|
| MODEL | TCP 2 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



| FOR LEB® | |
|----------------------------|--|
| MODEL | TCP 3 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



| FOR LEB® | |
|----------------------------|--|
| MODEL | TMW |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



| FOR LEB® | |
|----------------------------|--|
| MODEL | TMW |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



| FOR LEB® | |
|----------------------------|-------------------|
| MODEL | TMW |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 30.875 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



| FOR LIFE® | |
|----------------------------|---------------------------------------|
| MODEL | FID02 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | F, V, V PLUS (EU), V PLUS (IB) |



| FOR LIFE® | |
|----------------------------|---------------------------------------|
| MODEL | FID04 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | F, V, V PLUS (EU), V PLUS (IB) |



| FOR LIFE® | |
|----------------------------|---------------------------------------|
| MODEL | VIP2 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | F, V, V PLUS (EU), V PLUS (IB) |



| FOR LIFE® | |
|----------------------------|---------------------------------------|
| MODEL | VIP2 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | F, V, V PLUS (EU), V PLUS (IB) |

Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue et MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatiblen Silca Air4-Fernbedienungen zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiocomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.



Air4 Residential Remotes

L Air₄ Remotes

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe · IB = Spain and Portugal



| FOR LIFE® | |
|----------------------------|--------------------------------|
| MODEL | VIP4 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | F, V, V PLUS (EU), V PLUS (IB) |



| FOR LIFE® | |
|----------------------------|--------------------------------|
| MODEL | VIP4R |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | F, V, V PLUS (EU), V PLUS (IB) |



| FOR LINEAR® | |
|----------------------------|-----------------------------|
| MODEL | LINEAR |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



| FOR LINEAR® | |
|----------------------------|------------|
| MODEL | MEGACODE |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | V |



| FOR LINEAR-HCS® | |
|----------------------------|------------|
| MODEL | MULTICODE |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 40.685 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



| FOR LINEAR-HCS® | |
|----------------------------|--------------|
| MODEL | TX2T-A |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.9 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | V |



| FOR LINEAR-HCS® | |
|----------------------------|--------------|
| MODEL | TX3T-A |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.9 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | V |



| FOR LINEAR-HCS® | |
|----------------------------|--------------|
| MODEL | TX4T-A |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.9 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | V |



| FOR LUTEC® | |
|----------------------------|--------------------------|
| MODEL | TRC4 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | L, L2, F, V, V PLUS (EU) |



| FOR MARANTEC® | |
|----------------------------|---|
| MODEL | 21R |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |

Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue e MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatiblen Silca Air4-Fernbedienungen zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.

Air⁴ Residential Remotes



Air⁴ Remotes

M

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe • IB = Spain and Portugal



FOR MARANTEC®

| | |
|----------------------------|--|
| MODEL | D23 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR MARANTEC®

| | |
|----------------------------|------------------------------------|
| MODEL | D384-868 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 868.3 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR MARANTEC®

| | |
|----------------------------|--|
| MODEL | DIGITAL 21 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR MARANTEC®

| | |
|----------------------------|-------------------|
| MODEL | DIGITAL 21 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 40.685 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR MARANTEC®

| | |
|----------------------------|--|
| MODEL | DIGITAL 30 868 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR MARANTEC®

| | |
|----------------------------|------------------------------------|
| MODEL | DIGITAL 313 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 868.6 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR MARANTEC®

| | |
|----------------------------|------------------------------------|
| MODEL | DIGITAL 32 868 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 868.3 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR MEDVA®

| | |
|----------------------------|--|
| MODEL | UNITECH-3E |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L (IB), F, V, V PLUS (EU), V PLUS (IB) |



FOR MERLIN 2.0®

| | |
|----------------------------|-----------------------|
| MODEL | E940M |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 434.54 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | V, V PLUS (IB) |



FOR MERLIN 2.0®

| | |
|----------------------------|-----------------------|
| MODEL | E943M |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 434.54 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | V, V PLUS (IB) |

Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue et MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatible Silca Air4-Fernbedienung zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiocomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.



Air4 Residential Remotes

M Air₄ Remotes

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe · IB = Spain and Portugal



FOR MERLIN 2.0®

| | |
|----------------------------|-----------------------|
| MODEL | E945M |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 434.54 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | V, V PLUS (IB) |



FOR MERLIN/PROLIFT®

| | |
|----------------------------|-----------------------|
| MODEL | C943 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 434.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | V, V PLUS (IB) |



FOR MERLIN/PROLIFT®

| | |
|----------------------------|-----------------------|
| MODEL | C940 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 434.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | V, V PLUS (IB) |



FOR MERLIN/PROLIFT®

| | |
|----------------------------|-----------------------|
| MODEL | C945 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 434.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | V, V PLUS (IB) |




FOR MERLIN/PROLIFT®

| | |
|----------------------------|-----------------------|
| MODEL | M842 (GREEN) |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 434.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | V, V PLUS (IB) |



FOR MERLIN/PROLIFT®

| | |
|----------------------------|-----------------------|
| MODEL | M844 (GREEN) |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 434.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | V, V PLUS (IB) |



FOR MHOUSE®

| | |
|----------------------------|--|
| MODEL | GTX4 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR MHOUSE®

| | |
|----------------------------|--|
| MODEL | TX-3-4 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR MHOUSE®

| | |
|----------------------------|--|
| MODEL | TX3 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR MOOVO®

| | |
|----------------------------|--|
| MODEL | MT4 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |

Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue et MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatiblen Silca Air4-Fernbedienungen zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.

Air⁴ Residential Remotes



Air⁴ Remotes

M

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe • IB = Spain and Portugal



FOR MOTORSTAR®

| | |
|----------------------------|--|
| MODEL | CLIKSTAR 53 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR NEW GATE®

| | |
|----------------------------|---------------------------------------|
| MODEL | NOV03 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | F, V, V PLUS (EU), V PLUS (IB) |



FOR NICE®

| | |
|----------------------------|----------------------|
| MODEL | BIO BTK 27120 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 27.12 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR NICE®

| | |
|----------------------------|----------------------|
| MODEL | BIO BTK 30875 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 30.875 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR NICE®

| | |
|----------------------------|----------------------|
| MODEL | BIO BTK 40685 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 40.685 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR NICE®

| | |
|----------------------------|------------------------------------|
| MODEL | EASY S |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR NICE®

| | |
|----------------------------|---------------------|
| MODEL | EASY-K 30875 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 30.875 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR NICE®

| | |
|----------------------------|-------------------|
| MODEL | EASY-KM |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 40.685 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR NICE®

| | |
|----------------------------|----------------------|
| MODEL | EASY-KM 27120 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 27.12 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR NICE®

| | |
|----------------------------|----------------------|
| MODEL | EASY-KM 30875 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 30.875 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |

Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue et MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatiblen Silca Air4-Fernbedienungen zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiocomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.



Air4 Residential Remotes

N

Air₄ Remotes

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe • IB = Spain and Portugal



| FOR NICE® | |
|----------------------------|----------------------|
| MODEL | EASY-KM 40685 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 40.685 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | Q |



| FOR NICE® | |
|----------------------------|---------------------------------------|
| MODEL | ERA ON1E |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | F, V, V PLUS (EU), V PLUS (IB) |



| FOR NICE® | |
|----------------------------|------------------------------------|
| MODEL | ERA ON1E FM |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 868.46 FM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



| FOR NICE® | |
|----------------------------|---------------------------------------|
| MODEL | ERA ON2E |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | F, V, V PLUS (EU), V PLUS (IB) |



| FOR NICE® | |
|----------------------------|------------------------------------|
| MODEL | ERA ON2E FM |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 868.46 FM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



| FOR NICE® | |
|----------------------------|---------------------------------------|
| MODEL | ERA ON4E |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 868.46 FM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | F, V, V PLUS (EU), V PLUS (IB) |



| FOR NICE® | |
|----------------------------|------------------------------------|
| MODEL | ERA ON4E FM |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 868.46 FM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



| FOR NICE® | |
|----------------------------|------------------------------------|
| MODEL | ERA ON9E FM |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 868.46 FM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



| FOR NICE® | |
|----------------------------|--|
| MODEL | ERA-FLO1R |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L (IB), F, V, V PLUS (EU), V PLUS (IB) |



| FOR NICE® | |
|----------------------------|--|
| MODEL | ERA-FLO2R |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L (IB), F, V, V PLUS (EU), V PLUS (IB) |

Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue et MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatiblen Silca Air4-Fernbedienungen zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.

Air⁴ Residential Remotes



N



Air⁴ Remotes

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe • IB = Spain and Portugal



FOR NICE®

| | |
|----------------------------|--|
| MODEL | ERA-FLO4R |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L (IB), F, V, V PLUS (EU), V PLUS (IB) |



FOR NICE®

| | |
|----------------------------|--|
| MODEL | ERGO |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L (IB), F, V, V PLUS (EU), V PLUS (IB) |



FOR NICE®

| | |
|----------------------------|--|
| MODEL | FL01 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR NICE®

| | |
|----------------------------|--|
| MODEL | FL01R-S |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L (IB), F, V, V PLUS (EU), V PLUS (IB) |



FOR NICE®

| | |
|----------------------------|--|
| MODEL | FL02 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR NICE®

| | |
|----------------------------|--|
| MODEL | FL02R-S |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L (IB), F, V, V PLUS (EU), V PLUS (IB) |



FOR NICE®

| | |
|----------------------------|--|
| MODEL | FL04 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR NICE®

| | |
|----------------------------|--|
| MODEL | FL04R-S |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L (IB), F, V, V PLUS (EU), V PLUS (IB) |



FOR NICE®

| | |
|----------------------------|---------------------------------------|
| MODEL | INTI |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | F, V, V PLUS (EU), V PLUS (IB) |



FOR NICE®

| | |
|----------------------------|---------------------------------------|
| MODEL | ON4 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | F, V, V PLUS (EU), V PLUS (IB) |

Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue et MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatiblen Silca Air4-Fernbedienungen zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiocomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.



Air4 Residential Remotes

N

Air₄ Remotes

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe • IB = Spain and Portugal



| FOR NICE® | |
|----------------------------|--|
| MODEL | SMILO SM2 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



| FOR NICE® | |
|----------------------------|--|
| MODEL | SMILO SM4 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



| FOR NICE® | |
|----------------------------|--|
| MODEL | VERY VR |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



| FOR NOLOGO® | |
|----------------------------|---|
| MODEL | SMILE-R |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU) |



| FOR NORMSTAHL® | |
|----------------------------|---------------------|
| MODEL | EA433-K |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | NO / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | V PLUS (EU) |



| FOR NORMSTAHL® | |
|----------------------------|---------------------|
| MODEL | EA433-KM |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | NO / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | V PLUS (EU) |



| FOR NORMSTAHL® | |
|----------------------------|---------------------|
| MODEL | RCU 4332K |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | NO / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | V PLUS (EU) |



| FOR NORMSTAHL® | |
|----------------------------|---------------------|
| MODEL | RCU433 4K |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | NO / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | V PLUS (EU) |

Image
not
available

| FOR NORMSTAHL® | |
|----------------------------|-------------------|
| MODEL | T12018 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 40.685 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | Q |
| AIR4 | |

Image
not
available

| FOR NORMSTAHL® | |
|----------------------------|-------------------|
| MODEL | T12030 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 40.685 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | Q |
| AIR4 | |

Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue et MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatiblen Silca Air4-Fernbedienungen zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.

Air⁴ Residential Remotes



Air⁴ Remotes

N

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe • IB = Spain and Portugal



FOR NORMSTAHL®

| | |
|----------------------------|-------------------|
| MODEL | T40 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 40.685 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR NORTON®

| | |
|----------------------------|---|
| MODEL | NEO40-NTN |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (IB) |



FOR NORTON®

| | |
|----------------------------|---|
| MODEL | TXCD |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (IB) |



FOR NORTON®

| | |
|----------------------------|--|
| MODEL | TXE |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |

Image
not
available

FOR NOVOFERM®

| | |
|----------------------------|--|
| MODEL | HS 43-1E |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR NOVOFERM®

| | |
|----------------------------|--|
| MODEL | M512 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR NOVOFERM®

| | |
|----------------------------|--|
| MODEL | MCHS |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR NOVOFERM®

| | |
|----------------------------|--|
| MODEL | MICRO-NOVOTRON 312 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR NOVOFERM®

| | |
|----------------------------|--|
| MODEL | MICRO-NOVOTRON 512 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR NOVOFERM®

| | |
|----------------------------|--|
| MODEL | MINI-NOVOTRON 302 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |

Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue et MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatiblen Silca Air4-Fernbedienungen zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiocomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.



Air4 Residential Remotes

N Air₄ Remotes

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe • IB = Spain and Portugal



FOR NOVOFERM®

| | |
|----------------------------|--|
| MODEL | MINI-NOVOTRON 402 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR NOVOFERM®

| | |
|----------------------------|--|
| MODEL | MINI-NOVOTRON 504 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR NOVOFERM®

| | |
|----------------------------|-------------------|
| MODEL | MS41 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 40.685 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR NOVOFERM®

| | |
|----------------------------|--|
| MODEL | MINI-NOVOTRON 502 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR NOVOFERM®

| | |
|----------------------------|--|
| MODEL | MNHS |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |

Image
not
available



FOR NOVOFERM®

| | |
|----------------------------|--|
| MODEL | NOVOTRON 202 MB |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR NOVOFERM®

| | |
|----------------------------|--|
| MODEL | NOVOTRON 502 MAX 43-2 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR NOVOFERM®

| | |
|----------------------------|--|
| MODEL | NOVOTRON 504 MAX 43-4 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR NOVOFERM®

| | |
|----------------------------|-------------------|
| MODEL | S41 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 40.685 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |

Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue et MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatiblen Silca Air4-Fernbedienungen zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiocomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.

Air⁴ Residential Remotes



Air⁴ Remotes

N

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe • IB = Spain and Portugal

Image
not
available

FOR NOVOFERM®

| | |
|----------------------------|---------------------|
| MODEL | T102497-40-5 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 40.685 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR NOVOTECNIA®

| | |
|----------------------------|-------------------|
| MODEL | BITV |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 30.9 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR NOVOTECNIA®

| | |
|----------------------------|-------------------|
| MODEL | BIX |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 40.685 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR O&O®

| | |
|----------------------------|--|
| MODEL | RAY |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | L, L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR O&O®

| | |
|----------------------------|--|
| MODEL | T.COM R4-2 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR O&O®

| | |
|----------------------------|------------------------------------|
| MODEL | T.COM R8-4 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 868.3 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR O&O®

| | |
|----------------------------|--|
| MODEL | TX |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR PECCININ®

| | |
|----------------------------|---------------------|
| MODEL | TX 3C |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | F, V |



FOR PORTAMATIC®

| | |
|----------------------------|--|
| MODEL | MPH |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue et MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatiblen Silca Air4-Fernbedienungen zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiocomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.



Air4 Residential Remotes

P Air₄ Remotes

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe · IB = Spain and Portugal



FOR PORTAMATIC®

| | |
|----------------------------|------------------------------------|
| MODEL | MPSA |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR PORTAMATIC®

| | |
|----------------------------|------------------------------------|
| MODEL | MPSN |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR PORTIS®

| | |
|----------------------------|------------------------------------|
| MODEL | GO PRO MINI |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 868.35 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR PORTIS®

| | |
|----------------------------|------------------------------------|
| MODEL | TELTIS |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 868.35 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |

Image
not
available

FOR PRASTEL®

| | |
|----------------------------|---------------------------------------|
| MODEL | BFOR |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | F, V, V PLUS (EU), V PLUS (IB) |



FOR PRASTEL®

| | |
|----------------------------|-------------------|
| MODEL | KMFT |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 30.875 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR PRASTEL®

| | |
|----------------------------|------------------------------------|
| MODEL | KMFTP |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR PRASTEL®

| | |
|----------------------------|-------------------|
| MODEL | KMFTP |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 30.875 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR PRASTEL®

| | |
|----------------------------|------------------------------------|
| MODEL | KMFTP |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR PRASTEL®

| | |
|----------------------------|--|
| MODEL | MPSTFE |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |

Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue et MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatiblen Silca Air4-Fernbedienungen zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.

Air⁴ Residential Remotes



Air⁴ Remotes

P

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe • IB = Spain and Portugal



FOR PRASTEL®

| | |
|----------------------------|--|
| MODEL | MPSTFE 2RE |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR PRASTEL®

| | |
|----------------------------|--|
| MODEL | MPSTFE RJ |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR PRASTEL®

| | |
|----------------------------|---------------------------------------|
| MODEL | MPSTL E |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | F, V, V PLUS (EU), V PLUS (IB) |



FOR PRASTEL®

| | |
|----------------------------|-------------------|
| MODEL | MPSTLQ |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 40.685 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR PRASTEL®

| | |
|----------------------------|---------------------------------------|
| MODEL | MPSTP2E |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | F, V, V PLUS (EU), V PLUS (IB) |



FOR PRASTEL®

| | |
|----------------------------|---------------------------------------|
| MODEL | MTE |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | F, V, V PLUS (EU), V PLUS (IB) |



FOR PRASTEL®

| | |
|----------------------------|------------------------------------|
| MODEL | NCSMT4P-A |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR PRASTEL®

| | |
|----------------------------|---------------------------------------|
| MODEL | SLIM 4E |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | F, V, V PLUS (EU), V PLUS (IB) |



FOR PRASTEL®

| | |
|----------------------------|---------------------------------------|
| MODEL | TC4 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | F, V, V PLUS (EU), V PLUS (IB) |



FOR PRASTEL®

| | |
|----------------------------|---------------------------------------|
| MODEL | TRQ4P |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | F, V, V PLUS (EU), V PLUS (IB) |

Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue et MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatiblen Silca Air4-Fernbedienungen zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiocomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.



Air4 Residential Remotes

P Air₄ Remotes

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe · IB = Spain and Portugal



| FOR PROEM® | |
|----------------------------|---------------------------------------|
| MODEL | ER4C4ACS |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | F, V, V PLUS (EU), V PLUS (IB) |



| FOR PROEM® | |
|----------------------------|--|
| MODEL | ERC/ACD |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



| FOR PROEM® | |
|----------------------------|-------------------|
| MODEL | ERC/C27 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 27.095 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



| FOR PROGET® | |
|----------------------------|-------------------|
| MODEL | QTE |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 30.875 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



| FOR PUJOL® | |
|----------------------------|------------------------------------|
| MODEL | ET |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |




| FOR PUJOL® | |
|----------------------------|------------------------------------|
| MODEL | MARTE |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.85 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



| FOR PUJOL® | |
|----------------------------|--|
| MODEL | NEO |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



| FOR PUJOL® | |
|----------------------------|------------------------------------|
| MODEL | P15 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



| FOR PUJOL® | |
|----------------------------|-------------------|
| MODEL | PJ |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 30.035 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



| FOR PUJOL® | |
|----------------------------|--|
| MODEL | TWIN |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |

Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue et MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatiblen Silca Air4-Fernbedienungen zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiocomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.

Air⁴ Residential Remotes



Air⁴ Remotes

P

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe • IB = Spain and Portugal



FOR PUJOL®

| | |
|----------------------------|--|
| MODEL | VARIO 3 BLACK |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR PUJOL®

| | |
|----------------------------|--|
| MODEL | VARIO 3 OCEAN |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR PUJOL®

| | |
|----------------------------|--|
| MODEL | VARIO MARS |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR QTRON®

| | |
|----------------------------|-------------------------|
| MODEL | QT1000 TX1 433CH |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.9 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | V, V PLUS (EU) |



FOR QTRON®

| | |
|----------------------------|-------------------------|
| MODEL | QT1005 TX3 433CH |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.9 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | V, V PLUS (EU) |



FOR QTRON®

| | |
|----------------------------|-------------------------|
| MODEL | QT1010 TX4 433CH |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.9 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | V, V PLUS (EU) |



FOR QUASAR®

| | |
|----------------------------|--|
| MODEL | BETA |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR QUASAR®

| | |
|----------------------------|--|
| MODEL | ETA |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR QUASAR®

| | |
|----------------------------|--|
| MODEL | TX S433 2 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR RIB®

| | |
|----------------------------|--|
| MODEL | LITHIO |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |

Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue et MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatiblen Silca Air4-Fernbedienungen zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiocomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.



Air4 Residential Remotes

R Air₄ Remotes

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe • IB = Spain and Portugal



| FOR RIB® | |
|----------------------------|-------------------|
| MODEL | MOON |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 30.925 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



| FOR RIB® | |
|----------------------------|--|
| MODEL | MOON |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



| FOR RIB® | |
|----------------------------|--|
| MODEL | SUN |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



| FOR RIB® | |
|----------------------------|-------------------|
| MODEL | T91 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 30.925 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



| FOR RIB® | |
|----------------------------|-------------------|
| MODEL | T91 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 30.925 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



| FOR ROGER® | |
|----------------------------|--|
| MODEL | TX10 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



| FOR ROGER® | |
|----------------------------|--|
| MODEL | TX22 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



| FOR ROLLTORE® | |
|----------------------------|---------------------|
| MODEL | KMFPTP 30385 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 30.385 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



| FOR ROLLTORE® | |
|----------------------------|--|
| MODEL | MPSTFE |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



| FOR ROLLTORE® | |
|----------------------------|------------------------------------|
| MODEL | R330 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |

Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue et MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatiblen Silca Air4-Fernbedienungen zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.

Air⁴ Residential Remotes



Air⁴ Remotes

R

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe • IB = Spain and Portugal



FOR ROLLTORE®

| | |
|----------------------------|------------------------------------|
| MODEL | R40 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR ROLLTORE®

| | |
|----------------------------|----------------------|
| MODEL | R40-29.90 NEW |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 29.9 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR ROLLTORE®

| | |
|----------------------------|------------------------------------|
| MODEL | R40-330 NEW |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR ROPER®

| | |
|----------------------------|-----------------------|
| MODEL | GO |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 868.3 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | V, V PLUS (IB) |



FOR ROPER®

| | |
|----------------------------|----------------------------------|
| MODEL | NEO |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L (IB), F, V, V PLUS (IB) |



FOR ROPER®

| | |
|----------------------------|----------------------------------|
| MODEL | NER1 DCS |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L (IB), F, V, V PLUS (IB) |



FOR ROPER®

| | |
|----------------------------|------------------------------------|
| MODEL | TRINARY |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR SABUTOM®

| | |
|----------------------------|--|
| MODEL | BROOVER 3P |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR SABUTOM®

| | |
|----------------------------|--|
| MODEL | BROSTAR |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR SABUTOM®

| | |
|----------------------------|---------------------------------------|
| MODEL | NOVO |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | F, V, V PLUS (EU), V PLUS (IB) |

Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue et MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatiblen Silca Air4-Fernbedienungen zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiocomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.



Air4 Residential Remotes

S Air₄ Remotes

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe • IB = Spain and Portugal



FOR SEA®

| | |
|----------------------------|-------------------|
| MODEL | AGTD |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 30.9 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | Q |

FOR SEA®

| | |
|----------------------------|---------------------------------------|
| MODEL | COCCINELLA ROLL CARBON |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | F, V, V PLUS (EU), V PLUS (IB) |



FOR SEA®

| | |
|----------------------------|---------------------------------------|
| MODEL | COCCINELLA ROLL GREY |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | F, V, V PLUS (EU), V PLUS (IB) |



FOR SEA®

| | |
|----------------------------|---------------------------------------|
| MODEL | COCCINELLA ROLL RED |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | F, V, V PLUS (EU), V PLUS (IB) |



FOR SEA®

| | |
|----------------------------|-------------------|
| MODEL | EC 30900 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 30.9 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | Q |



FOR SEA®

| | |
|----------------------------|-------------------|
| MODEL | EC 40685 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 40.685 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | Q |



FOR SEA®

| | |
|----------------------------|--|
| MODEL | EC 433 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR SEA®

| | |
|----------------------------|---------------------------------------|
| MODEL | HEAD 2 433 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | F, V, V PLUS (EU), V PLUS (IB) |



FOR SEA®

| | |
|----------------------------|---------------------------------------|
| MODEL | HEAD 4 433 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | F, V, V PLUS (EU), V PLUS (IB) |



FOR SEA®

| | |
|----------------------------|------------------------------------|
| MODEL | HEAD ROLL 868 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 868.3 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |

Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue et MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatiblen Silca Air4-Fernbedienungen zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.

Air⁴ Residential Remotes



Air⁴ Remotes

S

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe • IB = Spain and Portugal



FOR **SEA®**

| | |
|----------------------------|--|
| MODEL | SMART DUAL |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR **SEA®**

| | |
|----------------------------|--|
| MODEL | SMART DUAL 433 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR **SEAV®**

| | |
|----------------------------|--|
| MODEL | BE HAPPY RS1 NEW |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR **SEAV®**

| | |
|----------------------------|--|
| MODEL | BE HAPPY RS2 NEW |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR **SEAV®**

| | |
|----------------------------|--|
| MODEL | BE HAPPY RS3 NEW |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR **SEAV®**

| | |
|----------------------------|--|
| MODEL | BE HAPPY S1 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR **SEAV®**

| | |
|----------------------------|--|
| MODEL | BE HAPPY S2 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR **SEAV®**

| | |
|----------------------------|--|
| MODEL | BE HAPPY S3 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR **SERAI®**

| | |
|----------------------------|------------------------------------|
| MODEL | SER 310 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR **SILVELOX®**

| | |
|----------------------------|----------------------------|
| MODEL | 3107467 VITE BIANCA |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | F, V, V PLUS (EU) |

Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue et MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatiblen Silca Air4-Fernbedienungen zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiocomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.



Air4 Residential Remotes

S

Air₄ Remotes

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe • IB = Spain and Portugal



| FOR SILVELOX® | |
|----------------------------|--------------------------|
| MODEL | TSM |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | F, V, V PLUS (EU) |



| FOR SIMBA® | |
|----------------------------|-------------------|
| MODEL | CVG |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 30.875 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



| FOR SIMBA® | |
|----------------------------|--|
| MODEL | RC |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



| FOR SIMINOR® | |
|----------------------------|-------------------|
| MODEL | CVM |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 27.195 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



| FOR SIMINOR® | |
|----------------------------|-------------------|
| MODEL | CVS |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 27.095 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



| FOR SIMINOR® | |
|----------------------------|--|
| MODEL | CVX |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



| FOR SIMINOR® | |
|----------------------------|---------------------------------------|
| MODEL | CVXNL |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | F, V, V PLUS (EU), V PLUS (IB) |



| FOR SIMINOR® | |
|----------------------------|-------------------|
| MODEL | EM47 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 27.095 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



| FOR SIMINOR® | |
|----------------------------|---------------------------------------|
| MODEL | ERXC4ACS / ER2C4ACS / ER4C4ACS |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | F, V, V PLUS (EU), V PLUS (IB) |



| FOR SIMINOR® | |
|----------------------------|---------------------------------------|
| MODEL | MITTO |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | F, V, V PLUS (EU), V PLUS (IB) |

Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue e MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatiblen Silca Air4-Fernbedienungen zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.

Air⁴ Residential Remotes



Air⁴ Remotes

S

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe • IB = Spain and Portugal



FOR SIMINOR®

| | |
|----------------------------|-------------------|
| MODEL | S38 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 30.875 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR SIMINOR®

| | |
|----------------------------|---------------------------------------|
| MODEL | SIM433 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | F, V, V PLUS (EU), V PLUS (IB) |



FOR SIMINOR®

| | |
|----------------------------|---------------------------------------|
| MODEL | SIM433 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | F, V, V PLUS (EU), V PLUS (IB) |

Image
not
available



FOR SOMFY®

| | |
|----------------------------|--|
| MODEL | CVX |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR SOMFY®

| | |
|----------------------------|------------------------------------|
| MODEL | K-EASY |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.42 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR SOMFY®

| | |
|----------------------------|------------------------------------|
| MODEL | K-EASY NEW |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.42 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR SOMFY®

| | |
|----------------------------|------------------------------------|
| MODEL | K-EASY OLD |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.42 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR SOMFY®

| | |
|----------------------------|------------------------------------|
| MODEL | KEYGO GX523 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.42 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR SOMFY®

| | |
|----------------------------|------------------------------------|
| MODEL | KEYTIS RTS |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.42 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |

Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue et MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatiblen Silca Air4-Fernbedienungen zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiocomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.



Air4 Residential Remotes

S Air₄ Remotes

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe • IB = Spain and Portugal



| FOR SOMFY® | |
|----------------------------|-----------------------------|
| MODEL | KEYTIS RTS NS |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.42 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



| FOR SOMFY® | |
|----------------------------|-----------------------------|
| MODEL | KEYTIS-NS-2-RTS |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.42 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



| FOR SOMFY® | |
|----------------------------|-----------------------------|
| MODEL | KEYTIS-NS-4-RTS |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.42 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



| FOR SOMFY® | |
|----------------------------|-----------------------------|
| MODEL | MITTO |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.42 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



| FOR SOMFY® | |
|----------------------------|------------|
| MODEL | OLD |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 40.685 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | Q |



| FOR SOMFY® | |
|----------------------------|------------|
| MODEL | RCS |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 40.685 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | Q |



| FOR SOMFY® | |
|----------------------------|-----------------------------|
| MODEL | TELIS 1-4 RTS |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.42 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



| FOR SOMFY® | |
|----------------------------|---|
| MODEL | TS 433 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



| FOR SOMMER® | |
|----------------------------|-----------------------------|
| MODEL | 4010 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 868.3 FM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



| FOR SOMMER® | |
|----------------------------|-----------------------------|
| MODEL | 4020 TX03-868 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 868.3 FM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |

Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue et MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatiblen Silca Air4-Fernbedienungen zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiocomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.

Air⁴ Residential Remotes



Air⁴ Remotes

S

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe • IB = Spain and Portugal



FOR SOMMER®

| | |
|----------------------------|------------------------------------|
| MODEL | 4025 433 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 434.42 FM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR SOMMER®

| | |
|----------------------------|------------------------------------|
| MODEL | 4026 TX03-868 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 868.3 FM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR SOMMER®

| | |
|----------------------------|-------------------|
| MODEL | S435-B |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 27.015 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |

Image
not
available



FOR SOMMER®

| | |
|----------------------------|------------------------------------|
| MODEL | 4025 868 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 868.3 FM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |

Image
not
available

FOR SOMMER®

| | |
|----------------------------|-------------------|
| MODEL | \$435-40 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 40.685 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR SOMMER®

| | |
|----------------------------|-------------------|
| MODEL | S501 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 40.685 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR SOMMER®

| | |
|----------------------------|---------------------|
| MODEL | T102497-27-5 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 27.045 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |

Image
not
available



FOR SOMMER®

| | |
|----------------------------|-------------------|
| MODEL | T397-40-2 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 40.685 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR SOMMER®

| | |
|----------------------------|------------------------------------|
| MODEL | TRX-55-868-4 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 868.8 FM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR SOMMER®

| | |
|----------------------------|------------------------------------|
| MODEL | TX03-434-2-XP |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 434.42 FM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |

Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue et MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatiblen Silca Air4-Fernbedienungen zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiocomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.



Air4 Residential Remotes

S

Air₄ Remotes

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe • IB = Spain and Portugal



Image
not
available

FOR SOMMER®

| | |
|----------------------------|------------------------------------|
| MODEL | TX03-868-2-XP |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 868.8 FM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR STAGNOLI®

| | |
|----------------------------|---------------------------------|
| MODEL | KALLISTO |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L2, F, V, V PLUS (EU) |



FOR SOMMER®

| | |
|----------------------------|------------------------------------|
| MODEL | TX03-868-4-XP |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 868.8 FM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR STAGNOLI®

| | |
|----------------------------|--|
| MODEL | ZEUS AZ442 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |

FOR STAGNOLI®

| | |
|----------------------------|---------------------------------|
| MODEL | VENUS AV223 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L, L2, F, V, V PLUS (EU) |



FOR TAU®

| | |
|----------------------------|---------------------------------------|
| MODEL | 250 SLIM RP |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | F, V, V PLUS (EU), V PLUS (IB) |

FOR TAU®

| | |
|----------------------------|---------------------------------------|
| MODEL | 250 T4 RC |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | F, V, V PLUS (EU), V PLUS (IB) |



FOR TAU®

| | |
|----------------------------|--|
| MODEL | 250-BUG 2 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |

FOR TAU®

| | |
|----------------------------|--|
| MODEL | 250-BUG 4 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |

Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue et MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatiblen Silca Air4-Fernbedienungen zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.

Air⁴ Residential Remotes



Air⁴ Remotes

T

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe • IB = Spain and Portugal



| FOR TEDSEN® | |
|----------------------------|--|
| MODEL | SKJ |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



| FOR TEDSEN® | |
|----------------------------|--|
| MODEL | SKX |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



| FOR TEDSEN® | |
|----------------------------|------------------------------------|
| MODEL | SKX DL |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.995 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



| FOR TEDSEN® | |
|----------------------------|------------------------------------|
| MODEL | SKX HD |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.995 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



| FOR TEDSEN® | |
|----------------------------|------------------------------------|
| MODEL | SKX HD |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 868.3 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



| FOR TEDSEN® | |
|----------------------------|------------------------------------|
| MODEL | SKX LC |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.995 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



| FOR TEDSEN® | |
|----------------------------|------------------------------------|
| MODEL | SKX MD |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.995 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



| FOR TEDSEN® | |
|----------------------------|------------------------------------|
| MODEL | SKX SL |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.995 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



| FOR TEDSEN® | |
|----------------------------|--|
| MODEL | SM |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |

Image
not
available

| FOR TELCOMA® | |
|----------------------------|-------------------|
| MODEL | 131500 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 40.685 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |

Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue et MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatiblen Silca Air4-Fernbedienungen zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiocomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.



Air4 Residential Remotes

T Air₄ Remotes

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe · IB = Spain and Portugal



FOR TELCOMA®

| | |
|----------------------------|--|
| MODEL | EDGE |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR TELCOMA®

| | |
|----------------------------|------------------------------------|
| MODEL | FM 402 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 FM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR TELCOMA®

| | |
|----------------------------|------------------------------------|
| MODEL | FM 402 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 FM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR TELCOMA®

| | |
|----------------------------|------------------------------------|
| MODEL | FM 402 E |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 FM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR TELCOMA®

| | |
|----------------------------|------------------------------------|
| MODEL | FM 404 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 FM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR TELCOMA®

| | |
|----------------------------|------------------------------------|
| MODEL | FM 404 E |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 FM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR TELCOMA®

| | |
|----------------------------|-------------------|
| MODEL | FOX 230 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 30.875 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR TELCOMA®

| | |
|----------------------------|-------------------|
| MODEL | FOX 440 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 40.685 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR TELCOMA®

| | |
|----------------------------|--|
| MODEL | NOIRE E |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR TELCOMA®

| | |
|----------------------------|-------------------|
| MODEL | RCK |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 30.875 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | Q |

Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue et MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatiblen Silca Air4-Fernbedienungen zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.

Air⁴ Residential Remotes



Air⁴ Remotes

T

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe • IB = Spain and Portugal



FOR TELCOMA®

| | |
|----------------------------|-------------------|
| MODEL | RCKT |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 30.875 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | Q |



FOR TELCOMA®

| | |
|----------------------------|-------------------|
| MODEL | RCKTM |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 30.875 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | OEM |
| AIR4 | Q |



FOR TELCOMA®

| | |
|----------------------------|------------------------------------|
| MODEL | RCS |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | FREE BAND |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | V, V PLUS (EU), V PLUS (IB) |



FOR TELCOMA®

| | |
|----------------------------|--|
| MODEL | TANGO SLIM |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR V2®

| | |
|----------------------------|---|
| MODEL | HANDY |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L (IB), F, V, V PLUS (EU), V PLUS (IB) |



FOR V2®

| | |
|----------------------------|---|
| MODEL | PHOENIX 433 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L (IB), F, V, V PLUS (EU), V PLUS (IB) |



FOR V2®

| | |
|----------------------------|---|
| MODEL | PHOX 433 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | ALS |
| AIR4 | L (IB), F, V, V PLUS (EU), V PLUS (IB) |




FOR V2®

| | |
|----------------------------|-------------------|
| MODEL | TCQ-30 |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 30.875 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR V2®

| | |
|----------------------------|-------------------|
| MODEL | TNQ |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 30.875 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |



FOR V2®

| | |
|----------------------------|-------------------|
| MODEL | TPQ-AF |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 30.875 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | Q |

Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue et MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatiblen Silca Air4-Fernbedienungen zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiocomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.



Air4 Residential Remotes

V Air₄ Remotes

Silca's The Catalogue and the MySilca App are always updated with the latest applications; simply search by original brand to find the compatible Silca Air4 remote.

EU = Europe · IB = Spain and Portugal



FOR V2®

| | |
|----------------------------|--|
| MODEL | TPR-43KF |
| ROLLING TYPE | FIXED CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR V2®

| | |
|----------------------------|---|
| MODEL | TRC |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L (IB), F, V, V PLUS (EU), V PLUS (IB) |



FOR V2®

| | |
|----------------------------|---|
| MODEL | TSC |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L (IB), F, V, V PLUS (EU), V PLUS (IB) |



FOR V2®

| | |
|----------------------------|---|
| MODEL | TXC2 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L (IB), F, V, V PLUS (EU), V PLUS (IB) |



FOR V2®

| | |
|----------------------------|---|
| MODEL | TXC4 |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L (IB), F, V, V PLUS (EU), V PLUS (IB) |



FOR VDS®

| | |
|----------------------------|--|
| MODEL | ECO-R |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |



FOR VDS®

| | |
|----------------------------|--|
| MODEL | TRQ 2P/4P |
| ROLLING TYPE | ROLLING CODE |
| FREQUENCY | 433.92 AM |
| EASY SCAN / EASY SCAN PLUS | YES / YES |
| ON RECEIVER PROCEDURE | |
| AIR4 | L, L (IB), L2, F, V, V PLUS (EU), V PLUS (IB) |

Silca The Catalogue e MySilca App sono aggiornati con le ultime applicazioni radiocomando. È sufficiente effettuare una ricerca per marca e modello originale per individuare il radiocomando Silca Air4 compatibile. Silca The Catalogue et MySilca App sont à jour avec les dernières applications des télécommandes. Il suffit de lancer une recherche par marque et par modèle original pour trouver la télécommande Silca Air4 compatible. Silca The Catalogue und MySilca App sind mit den neuesten Fernbedienungsanwendungen aktualisiert. Sie müssen einfach nur eine Suche nach Marke und Original-Modell starten, um die kompatible Silca Air4-Fernbedienung zu finden. Silca The Catalogue y MySilca App están actualizados con las últimas aplicaciones para radiomandos. Solamente se ha de efectuar una búsqueda por marca y modelo original para identificar el radiomando Silca Air4 compatible. Silca The Catalogue e MySilca App são atualizados com as últimas aplicações do rádio controlo. É suficiente efectuar uma pesquisa por marca e modelo original para individualizar o rádio controlo Silca Air4 compatível.

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.



Remotes Procedures

Procedure Radiocomandi
Funkfernbedienungen Vorgehenweise
Procédures Télécommandes
Procedimientos dos Radiocomandos
Procedimentos Rádio Controlos
Procedure Afstandsbedieningen



Air₄ Remotes Procedures

Copy Fixed Code Remotes with Air4 F-L-L IB-L2



Copy fixed code remotes with Air4 F-L-L IB-L2

- 1 Press and hold down **button 1** on the Air4.
- 2 At the same time press **button 4 four times**.
- 3 Release both buttons of Air4.
- 4 Air4 remote control led will flash briefly about every 2 seconds.
- 5 Place the remote control to be cloned back to back with the Air4.
- 6 Press and hold down the button to be copied from the original remote control.
- 7 Wait for the Air4 led to start **flashing rapidly** which confirms that the code has been acquired. Release the original remote control's button.
- 8 While the led is flashing, press the Air4 button to which the code must be transferred and hold down until the led goes out.

Copia radiocomando a codice fisso con Air4 F-L-L IB-L2

- 1 Premere e mantenere premuto il **tasto 1** del radiocomando Air4.
- 2 Contemporaneamente premere **4 volte il tasto 4**.
- 3 Rilasciare entrambi i tasti del radiocomando Air4.
- 4 Air4 emetterà un breve lampeggio ogni 2 secondi circa.
- 5 Posizionare il radiocomando da clonare schiena a schiena con Air4.
- 6 Premere e mantenere premuto il tasto da copiare del radiocomando originale.
- 7 Attendere che il led di Air4 cambi lampeggio (**lampeggio più veloce**) a conferma del corretto apprendimento del codice. Rilasciare il tasto del radiocomando originale.
- 8 Mentre il led lampeggia, premere il tasto di Air4 sul quale si desidera inserire il codice appena appreso e mantenerlo premuto fino a quando il led non si spegne.

Kopieranleitung Funkfernbedienung fixer Code mit Air4 F-L-L IB-L2

- 1 Drücken und halten Sie **Taste 1** an der Air4.
- 2 Gleichzeitig drücken Sie **Taste 4 viermal**.
- 3 Beide Tasten der Air4 los lassen.
- 4 Air4 Funkfernbedienungsstatus LED blinkt nun langsam (alle 2 Sekunden).
- 5 Die Originalfunkfernbedienung nun Rücken an Rücken zur Air4 halten.
- 6 Nun die zu kopierende Taste an der Originalfunkfernbedienung drücken.
- 7 Warten, bis die LED an der Air4 **schnell blinkt**. Damit wird bestätigt, dass der Originalcode gelesen wurde. Die Taste an der Originalfunkfernbedienung nun los lassen.
- 8 Während die LED blinkt, jene Taste an der Air4 drücken, welche programmiert werden soll. Die Taste solange drücken, bis die LED erlischt.

Copier des télécommandes à code fixe avec Air4 F-L-L IB-L2

- 1 Maintenez le **bouton 1** du Air4 appuyé.
- 2 Appuyez en même temps **quatre fois sur le bouton 4**.
- 3 Relâchez les deux boutons du Air4.
- 4 La led de la télécommande Air4 clignotera brièvement toutes les 2 secondes environ.
- 5 Placez la télécommande à reproduire dos à dos avec le Air4.
- 6 Maintenez appuyé le bouton de la télécommande originale à copier.
- 7 Attendez que la led du Air4 commence à **clignoter rapidement**, ce qui confirme que le code a bien été acquis. Relâchez le bouton de la télécommande originale.
- 8 Pendant que la led clignote, appuyez sur le bouton du Air4 sur lequel le code doit être transféré et maintenez appuyé jusqu'à ce que la led s'éteigne.

Copy Fixed Code Remotes with Air4 F-L-L IB-L2



Duplicar mandos de **código fijo** con Air4 F-L-L IB-L2

- 1 Pulsar y mantener apretado el **botón 1** del Air4.
- 2 Al mismo tiempo, apretar el **botón 4 cuatro veces**.
- 3 Soltar ambos botones del mando Air4.
- 4 El led del mando Air4 parpadeará brevemente cada 2 segundos.
- 5 Colocar el mando que se quiere clonar dorso a dorso con el Air4.
- 6 Pulsar y mantener apretado el botón que se quiere duplicar del mando original.
- 7 Esperar que el led Air4 empiece a **parpadear rápidamente**, lo cual indica que se ha adquirido el código. Soltar el botón en el mando original.
- 8 Mientras el led parpadea, apretar el botón del Air4 al cual se tiene que transferir el código. Mantener apretado hasta que el led se apague.

Cópia rádio controlo de **código fixo** com Air4 F-L-L IB-L2

- 1 Premir e manter premida a **tecla 1** do rádio controlo Air4.
- 2 Simultaneamente premir **4 vezes a tecla 4**.
- 3 Soltar ambas as teclas do rádio controlo Air4.
- 4 Air4 vai acender com intermitência breve em cada 2 segundos.
- 5 Posicionar o rádio controlo a clonar com a parte traseira contra a parte traseira de Air4.
- 6 Premir e manter premida a tecla a copiar do rádio controlo original.
- 7 Aguardar que o led do Air4 mude intermitência (**luz intermitente mais rápida**) para confirmar que o código foi aquisitado correctamente. Soltar a tecla do rádio controlo original.
- 8 Enquanto o led piscar, premir a tecla do Air4 em que se deseja inserir o código que se acaba de aquisitar e mantê-la premida até o led se apagar.

Kopieer **vaste codes** van de afstandsbediening met Air4 F-L-L IB-L2

- 1 Houd **knop 1** van de Air4 ingedrukt.
- 2 Druk tegelijkertijd 4 keer op **knop 4**.
- 3 Laat beide knoppen van de Air4 los.
- 4 Het lampje van de Air4 afstandsbediening zal elke 2 seconden kort knipperen.
- 5 Plaats de te kopiëren afstandsbediening met de rug tegen de Air4.
- 6 Houd de te kopiëren knop van de originele afstandsbediening ingedrukt.
- 7 Wacht tot het lampje van de Air4 **snel begint te knipperen**. Dit betekent dat de code goedgekeurd is. Laat de knop van de originele afstandsbediening los.
- 8 Terwijl het lampje knippert, houd de Air4 knop waarnaar de code overgeplaatst moet worden ingedrukt tot het lampje uitgaat.



Air₄ Remotes Procedures

Copy Fixed Code Remotes with Air4 V-Air4 Plus V(EU&IB)



Copy fixed code remotes with Air4 V - Air4 Plus V (EU&IB)

- 1 Place the remote control to be cloned in front of the Air4, at a distance of about 2 centimetres.
- 2 Press and hold down **button 1** on the Air4 remote control.
- 3 At the same time press **button 4** four times.
- 4 Release both buttons of Air4 remote control.
- 5 Air4 remote control led will flash briefly about every 2 seconds.
- 6 Press and hold down the button to be copied from the original remote control and wait for the Air4 led to start **flashing rapidly**, which confirms that the code has been acquired. Release the original remote control's button.
- 7 While the led is flashing, press the Air4 button to which the code must be transferred and hold down until the led goes out.

Copia radiocomando a codice fisso con Air4 V Air4 Plus V (EU&IB)

- 1 Posizionare il radiocomando da clonare di fronte a Air4 a circa 2 centimetri di distanza.
- 2 Premere e mantenere premuto il **tasto 1** del radiocomando Air4.
- 3 Contemporaneamente premere 4 volte il **tasto 4**.
- 4 Rilasciare entrambi i tasti del radiocomando.
- 5 Air4 emetterà un breve lampeggio ogni 2 secondi circa.
- 6 Premere e mantenere premuto il tasto del radiocomando originale e attendere che il led di Air4 cambi lampeggio (**lampeggio più veloce**), a conferma del corretto apprendimento del codice. Rilasciare il tasto del radiocomando originale.
- 7 Mentre il led lampeggia, premere il tasto di Air4 sul quale si desidera inserire il codice appena appreso e mantenerlo premuto fino allo spegnimento.

Kopieranleitung Funkfernbedienung fixer Code mit Air4 V Air4 Plus V (EU&IB)

- 1 Platzieren sie die zu kopierende Funkfernbedienung ca. 2 Zentimeter vor der Air4.
- 2 Drücken und halten Sie **Taste 1** an der Air4.
- 3 Gleichzeitig drücken Sie **Taste 4** viermal.
- 4 Beide Tasten der Air4 los lassen.
- 5 Air4 Funkfernbedienungsstatus LED blinkt nun langsam (alle 2 Sekunden).
- 6 Nun die zu kopierende Taste an der Originalfunkfernbedienung drücken. Warten, bis die LED an der Air4 **schnell blinkt**. Damit wird bestätigt, dass der Originalcode gelesen wurde. Die Taste an der Originalfunkfernbedienung nun los lassen.
- 7 Während die LED blinkt, jene Taste an der Air4 drücken, welche programmiert werden soll. Die Taste so lange drücken, bis die LED erlischt.

Copier des télécommandes à code fixe avec Air4 V Air4 Plus V (EU&IB)

- 1 Placez la télécommande à reproduire face au Air4 à une distance d'environ 2 centimètres.
- 2 Maintenez le **bouton 1** de la télécommande Air4 appuyé.
- 3 Appuyez en même temps quatre fois sur le **bouton 4**.
- 4 Relâchez les deux boutons du Air4.
- 5 La led de la télécommande Air4 clignotera brièvement toutes les 2 secondes environ.
- 6 Maintenez le bouton de la télécommande originale à copier appuyé et attendez que la led du Air4 commence à **cigner rapidement**, ce qui confirme que le code a bien été acquis. Relâchez le bouton de la télécommande.
- 7 Pendant que la led clignote, appuyez sur le bouton du Air4 sur lequel le code doit être transféré et maintenez appuyé jusqu'à ce que la led s'éteigne.

Copy Fixed Code Remotes with Air4 V-Air4 Plus V(EU&IB)



Duplicar mandos de **código fijo con Air4 V Air4 Plus V (EU&IB)**

- 1** Colocar el mando que se quiere clonar delante del Air4 a una distancia de unos 2 centímetros.
- 2** Pulsar y mantener apretado el **botón 1** del mando Air4.
- 3** Al mismo tiempo, apretar el **botón 4** cuatro veces.
- 4** Soltar ambos botones del mando Air4.
- 5** El led del mando Air4 parpadeará brevemente cada 2 segundos aproximadamente.
- 6** Pulsar y mantener apretado el botón que se quiere duplicar del mando original y esperar a que el led Air4 empiece a **parpadear rápidamente**, lo cual confirma que se ha adquirido el código. Soltar botón del mando original.
- 7** Mientras el led parpadea, apretar el botón del Air4 al cual se tiene que transferir el código. Mantener apretado hasta que el led se apague.

Cópia rádio controlo de **código fixo com Air4 V Air4 Plus V (EU&IB)**

- 1** Posicionar o rádio controlo a clonar perante o Air4 a uma distância de aprox. 2 cm.
- 2** Premir e manter premida a **tecla 1** do rádio controlo Air4.
- 3** Simultaneamente premir 4 vezes a **tecla 4**.
- 4** Soltar ambas as teclas do rádio controlo.
- 5** Air4 vai acender com intermitência breve em cada 2 segundos.
- 6** Premir e manter premida a tecla do rádio controlo original e aguardar que o led do Air4 mude intermitência (**luz intermitente mais rápida**), para confirmar que o código foi aquisitado correctamente. Soltar a tecla do rádio controlo original.
- 7** Enquanto o led piscar, premir a tecla do Air4 em que se deseja inserir o código que se acaba de aquisitar e mantê-la premida até o led se apagar.


Kopieer vaste codes van de afstandsbediening met **Air4 V Air4 Plus V (EU&IB)**

- 1** Plaats de te kopiëren afstandsbediening voor de Air4 op een afstand van 2cm.
- 2** Houd **knop 1** van de Air4 ingedrukt.
- 3** Druk tegelijkertijd 4 keer op **knop 4**.
- 4** Laat beide knoppen van de Air4 los.
- 5** Het lampje van de Air4 afstandsbediening zal elke 2 seconden kort knipperen.
- 6** Houd de te kopiëren knop van de originele afstandsbediening ingedrukt en wacht tot het lampje van de Air4 **snel begint te knipperen**. Dit betekent dat de code goedgekeurd is. Laat de knop van de originele afstandsbediening los.
- 7** Terwijl het lampje knippert, houd de Air4 knop waarnaar de code overgeplaatst moet worden ingedrukt tot het lampje uitgaat.



Air₄ Remotes Procedures

Copy Fixed Code Remotes with Air4 Q

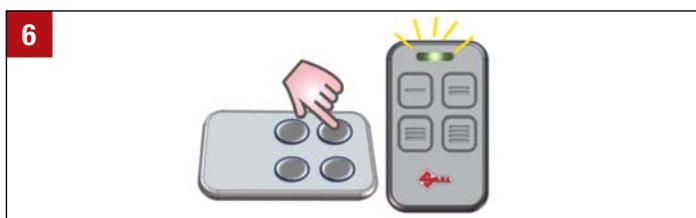

Copy fixed code remotes with Air4 Q

- 1 Place the remote control to be cloned perpendicularly, in the lower left side of the Air4.
- 2 Press **button 1** on the Air4 remote control.
- 3 At the same time press **button 4** four times.
- 4 Release both buttons.
- 5 Air4 remote control led will start flashing briefly about every 2 seconds.
- 6 Press and hold down the button to be copied from the original remote control and wait for the Air4 led to start **flashing rapidly**, which confirms acquisition of the code. Release the button.
- 7 Press the Air4 remote control button to be memorized. Wait for the led to go out.

The procedure continues on page 88

Copia radiocomando a codice fisso con Air4 Q

- 1 Posizionare il radiocomando da clonare perpendicolarmente al radiocomando Air4.
- 2 Premere il **tasto 1** del radiocomando Air4.
- 3 Contemporaneamente premere 4 volte il **tasto 4**.
- 4 Rilasciare entrambi i tasti del radiocomando.
- 5 Air4 emetterà un breve lampeggio ogni 2 secondi circa.
- 6 Premere e mantenere premuto il tasto del radiocomando originale e attendere che il led di Air4 cambi lampeggio (**lampeggio più veloce**) a conferma del corretto apprendimento del codice. Rilasciare il tasto.
- 7 Premere il tasto da memorizzare del radiocomando Air4 e attendere che il led si spegna.

La procedura prosegue a pagina 88

Kopieranleitung Funkfernbedienung fixer Code mit Air4 Q

- 1 Stellen Sie die zu kopierende Funkfernbedienung senkrecht zur Funkfernbedienung Air4.
- 2 Drücken und halten Sie **Taste 1** an der Air4.
- 3 Gleichzeitig drücken Sie **Taste 4** viermal.
- 4 Beide Tasten der Air4 los lassen.
- 5 Air4 Funkfernbedienungsstatus LED blinkt nun langsam (alle 2 Sekunden).
- 6 Nun die zu kopierende Taste an der Originalfunkfernbedienung drücken. Warten, bis die LED an der Air4 **schnell blinkt**. Damit wird bestätigt, dass der Originalcode gelesen wurde. Die Taste an der Originalfunkfernbedienung nun los lassen.
- 7 Drücken Sie die Taste der Funkfernbedienung Air4, wo Sie den Code speichern wollen und warten Sie bis die LED ausschaltet.


Der Vorgang geht weiter auf Seite 88

Copier des télécommandes à code fixe avec Air4 Q

- 1 Placez la télécommande à reproduire perpendiculairement, dans le coin inférieur gauche de la télécommande Air4.
- 2 Appuyez sur le **bouton 1** de la télécommande Air4.
- 3 Appuyez en même temps quatre fois sur le **bouton 4**.
- 4 Relâchez les deux boutons.
- 5 La led de la télécommande Air4 commencera à clignoter brièvement toutes les 2 secondes environ.
- 6 Maintenez appuyé le bouton à copier de la télécommande originale et attendez que la led du Air4 commence à **clignoter rapidement**, ce qui confirme l'acquisition du code. Relâchez le bouton.
- 7 Appuyez sur le bouton à mémoriser de la télécommande Air4. Attendez que la led s'éteigne.

La procédure continue à la page 88

Copy Fixed Code Remotes with Air4 Q

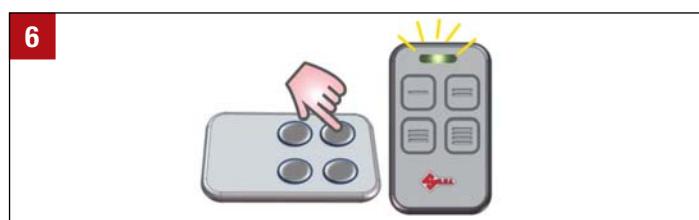

Duplicar mandos de **código fijo con Air4 Q**

- 1 Colocar el mando que se quiere clonar perpendicularmente en la parte de abajo a la izquierda del mando Air4.
- 2 Pulsar **botón 1** en mando Air4.
- 3 Al mismo tiempo, pulsar **botón 4** cuatro veces.
- 4 Soltar ambos botones.
- 5 El led del mando Air4 empezará a parpadear brevemente cada 2 segundos, aproximadamente.
- 6 Pulsar y apretar continuamente el botón que se quiere duplicar del mando original y esperar a que el led Air4 empiece a **parpadear rápidamente**, lo cual confirma la adquisición del código. Soltar botón.
- 7 Pulsar el botón del mando Air4 que se quiere memorizar. Esperar hasta que se apague el led.

El procedimiento sigue en la página 89

Cópia rádio controlo de **código fixo com Air4 Q**

- 1 Posicionar o rádio controlo a clonar perpendicularmente ao rádio controlo Air4.
- 2 Premir a **tecla 1** do rádio controlo Air4.
- 3 Simultaneamente premir 4 vezes a **tecla 4**.
- 4 Soltar ambas as teclas do rádio controlo.
- 5 Air4 vai acender de modo intermitente breve em cada 2 segundos.
- 6 Premir e manter premida a tecla do rádio controlo original e aguardar que o led do Air4 mude intermitência (**luz intermitente mais rápida**), para confirmar que o código foi aquisitado correctamente. Soltar a tecla.
- 7 Premir a tecla a memorizar do rádio controlo Air4 e aguardar que o led se apague.

O procedimento continua na página 89

Kopieer **vaste codes** van de afstandsbediening met Air4 Q

- 1 Plaats de te kopiëren afstandsbediening loodrecht aan de linkerkant van de Air4.
- 2 Druk op **knop 1** van de Air4 afstandsbediening.
- 3 Druk tegelijkertijd 4 keer op **knop 4**.
- 4 Laat beide knoppen los.
- 5 Het lampje van de Air4 afstandsbediening zal elke 2 seconden kort knipperen.
- 6 Houd de te kopiëren knop van de originele afstandsbediening ingedrukt en wacht tot het lampje van de Air4 **snel begint te knipperen**. Dit betekent dat de code goedgekeurd is. Laat de knop los.
- 7 Druk op de Air4 knop die u wil opslaan. Wacht tot het lampje uitgaat.

De procedure gaat verder op pagina 89



Air₄ Remotes Procedures

Copy Fixed Code Remotes with Air4 Q

8



9



10



11



Copy fixed code remotes with Air4 Q

After having selected the antenna tuning function in Easy Scan:

8 Open the remote control shell.

9 Bring the quartz remote control to the Easy Scan reading area. Press and hold a button on the remote control. With a ceramic screwdriver slowly turn the antenna's adjusting screw to obtain the maximum amplitude of intensity indicated on the Easy Scan display.

10 Once you reach the maximum value, move the remote control slightly away from the Easy Scan device and repeat the process until you reach the maximum amplitude of intensity indicated on the Easy Scan display.

11 Close the remote control shell.

Copia radiocomando a codice fisso con Air4 Q

Dopo aver selezionato la funzione di tuning antenna del menu di Easy Scan:

8 Aprire il guscio del radiocomando Air4.

9 Avvicinare il radiocomando quarzato alla zona di lettura, premere e mantenere premuto un tasto. Con un cacciavite ceramico ruotare lentamente la vite che regola l'antenna per avere l'ampiezza massima dell'indicatore di intensità sul display.

10 Una volta raggiunto il valore massimo, allontanare leggermente il radiocomando e ripetere l'operazione fino a raggiungere il massimo visualizzabile sul display.

11 Chiudere il guscio del radiocomando.

Kopieranleitung Funkfernbedienung fixer Code mit Air4 Q

Nach der Auswahl der Funktion Antennentuning im Menu des Easy Scan:

8 Öffnen Sie das Gehäuse der Funkfernbedienung Air4.

9 Nähern Sie die Quarz-Funkfernbedienung dem Auslesebereich, drücken Sie eine Taste und halten Sie sie gedrückt. Drehen Sie langsam mit einem Keramikschaubenzieher die Schraube der Antenneneinstellung bis auf dem Display die höchste Signalstärke angezeigt wird.

10 Nach Einstellung des Höchstwertes, entfernen Sie leicht die Funkfernbedienung und wiederholen Sie den Vorgang bis der höchste am Display anzeigbare Wert erreicht wird.

11 Schließen Sie das Gehäuse der Funkfernbedienung.

Copier des télécommandes à code fixe avec Air4 Q

Après avoir sélectionné la fonction réglage d'antenne dans Easy Scan:

8 Ouvrez la coque de la télécommande.

9 Approchez la télécommande à quartz à la zone de lecture Easy Scan. Maintenez un bouton de la télécommande appuyé. Avec un tournevis en céramique, tournez doucement la vis de réglage de l'antenne pour obtenir l'amplitude d'intensité maximum indiquée sur l'affichage Easy Scan.

10 Une fois la valeur maximum obtenue, éloignez doucement la télécommande du dispositif Easy Scan et répétez le processus jusqu'à ce que vous obteniez l'amplitude d'intensité maximum indiquée sur l'affichage Easy Scan.

11 Refermez la coque de la télécommande.

Copy Fixed Code Remotes with Air4 Q

8



9



10



11



Duplicar mandos de **código fijo** con Air4 Q

Después de seleccionar la función sintonizar antena en Easy Scan:

- 8** Abrir la carcasa del mando.
- 9** Acercar el mando de cuarzo a la zona de Easy Scan. Pulsar y mantener apretado un botón en el mando. Con un destornillador de cerámica, girar el tornillo de ajuste de la antena lentamente hasta obtener la amplitud máxima de intensidad indicada en la pantalla Easy Scan.
- 10** Despues de alcanzar el valor máximo, alejar el mando ligeramente del dispositivo Easy Scan fácil y repetir el proceso hasta obtener la amplitud máxima de intensidad indicada en la pantalla Easy Scan.
- 11** Cerrar las carcasas del mando.

Cópia rádio controlo de **código fixo** com Air4 Q

Depois de seleccionada a função de tuning antena do menu de Easy Scan:

- 8** Abrir o invólucro do rádio controlo.
- 9** Aproximar o rádio controlo quartzado da zona de leitura, premir e manter premida uma tecla. Com uma chave de fendas cerâmica rodar lentamente o parafuso que regula a antena para ter a amplidão máxima do indicador de intensidade no visor.
- 10** Uma vez alcançado o valor máximo, afastar um pouco o rádio controlo e repetir a operação até alcançar o máximo que pode ser visualizado no visor.
- 11** Fechar o invólucro do rádio controlo.

Kopieer **vaste codes** van de afstandsbediening met Air4 Q

Nadat de functie antenne tuning in Easy Scan geselecteerd is:

- 8** Open de afstandsbediening.
- 9** Breng de quartz afstandsbediening naar het Easy Scan leesvak. Houd een knop op de afstandsbediening ingedrukt. Draai de schroef van de antenne voorzichtig los met een keramische schroevendraaier om het maximale intensiteitsbereik te verkrijgen die aangegeven is op de Easy Scan.
- 10** Wanneer de maximale waarde bereikt is, haal de afstandsbediening weg van de Easy Scan en herhaal dezelfde procedure tot het maximale intensiteitsbereik op de display van de Easy Scan aangegeven wordt.
- 11** Sluit de afstandsbediening.



Air₄ Remotes Procedures

Copy Rolling Code Normal with Air4 F-L-L IB-L2



Copy Rolling Code normal remotes with Air4 F-L-L IB-L2

- 1 Press and hold down **button 1** on the Air4.
- 2 At the same time press **button 4** four times.
- 3 Release both buttons of Air4.
- 4 Air4 remote control led will flash briefly about every 2 seconds.
- 5 Place the remote control to be cloned back to back with the Air4.
- 6 Press and hold down the button to be copied from the original remote control.
- 7 Wait for the Air4 led to start **flashing rapidly**, which confirms that the code has been acquired. Release the original remote control's button.
- 8 While the led is flashing, press the Air4 button to which the code must be transferred and hold down until the led goes out.

Note: a procedure is required on the receiver (A.L.S./Original procedure)

Kopieranleitung Funkfernbedienung Rollender Code normal mit Air4 F-L-L IB-L2

- 1 Drücken und halten Sie **Taste 1** an der Air4.
- 2 Gleichzeitig drücken Sie **Taste 4** viermal.
- 3 Beide tasten der Air4 los lassen.
- 4 Air4 Funkfernbedienungsstatus LED blinkt nun langsam (alle 2 Sekunden).
- 5 Die Originalfunkfernbedienung nun Rücken an Rücken zur Air4 halten.
- 6 Nun die zu kopierende Taste an der Originalfunkfernbedienung drücken.
- 7 Warten, bis die LED an der Air4 **schnell blinkt**. Damit wird bestätigt, dass der Originalcode gelesen wurde. Die Taste an der Originalfunkfernbedienung los lassen.
- 8 Während die LED blinkt, jene Taste an der Air4 drücken, welche programmiert werden soll. Die Taste solange drücken, bis die LED erlischt.

Bemerkung: muss am Empfänger angelernt werden (A.L.S./Vorgehensweise Original)

Copia radiocomando Rolling Code normal con Air4 F-L-L IB-L2

- 1 Premere e mantenere premuto il **tasto 1** del radiocomando Air4.
- 2 Contemporaneamente premere 4 volte il **tasto 4**.
- 3 Rilasciare entrambi i tasti del radiocomando Air4.
- 4 Air4 emetterà un breve lampeggio ogni 2 secondi circa.
- 5 Posizionare il radiocomando da clonare schiena a schiena.
- 6 Premere e mantenere premuto il tasto da copiare del radiocomando originale.
- 7 Attendere che il led di Air4 cambi lampeggio (**lampeggio più veloce**) a conferma del corretto apprendimento del codice. Rilasciare il tasto del radicomando originale.
- 8 Mentre il led lampeggia, premere il tasto di Air4 sul quale si desidera inserire il codice appena appreso e mantenerlo premuto fino a quando il led non si spegne.

Nota: è necessaria la procedura sulla ricevente (A.L.S. o Originale)

Copier des télécommandes normales à code variable avec Air4 F-L-L IB-L2

- 1 Maintenez le **bouton 1** du Air4 appuyé.
- 2 Appuyez en même temps quatre fois sur le **bouton 4**.
- 3 Relâchez les deux boutons du Air4.
- 4 La led de la télécommande Air4 clignotera brièvement toutes les 2 secondes environ.
- 5 Placez la télécommande à reproduire dos à dos avec le Air4.
- 6 Maintenez le bouton à copier appuyé sur la télécommande originale.
- 7 Attendez que la led du Air4 commence à **clignoter rapidement**, ce qui confirme que le code a bien été acquis. Relâchez le bouton de la télécommande originale.
- 8 Pendant que la led clignote, appuyez sur le bouton du Air4 sur lequel le code doit être transféré et maintenez appuyé jusqu'à ce que la led s'éteigne.

Note: une procédure est requise sur le récepteur (A.L.S./procédure originale)

Copy Rolling Code Normal with **Air4 F-L-L IB-L2**



Copiar mandos **Rolling Code Normales con Air4 F-L-L IB-L2**

- 1 Pulsar y mantener apretado el **botón 1** en el Air4.
- 2 Al mismo tiempo, apretar el **botón 4** cuatro veces.
- 3 Soltar ambos botones del Air4.
- 4 El led del mando Air4 parpadeará brevemente cada 2 segundos aproximadamente.
- 5 Colocar el mando que se quiere clonar dorso a dorso con el Air4.
- 6 Pulsar y mantener apretado el botón dónde se quiere duplicar del mando original.
- 7 Esperar que el led del mando Air4 empiece a **parpadear rápidamente**, lo cual indica que se ha adquirido el código. Soltar botón en mando original.
- 8 Mientras el led parpadea, apretar el botón del Air4 dónde tiene que transferir el código. Mantener apretado hasta que el led se apague.

Aviso: se requiere un procedimiento en el receptor (A.L.S. o Original)

Rádio controlo **Rolling Code Normal com Air4 F-L-L IB-L2**

- 1 Premir e manter premida a tecla 1 do rádio controlo Air4.
- 2 Simultaneamente premir 4 vezes a **tecla 4**.
- 3 Soltar ambas as teclas do rádio controlo Air4.
- 4 Air4 vai acender com intermitência breve em cada 2 segundos.
- 5 Posicionar o rádio controlo a clonar com a parte traseira contra a parte traseira de Air4.
- 6 Premir e manter premida a tecla a copiar do rádio controlo original.
- 7 Aguardar que o led do Air4 mude intermitência (**luz intermitente mais rápida**) para confirmar que o código foi aquisitado correctamente. Soltar a tecla do rádio controlo original.
- 8 Enquanto o led piscar, premir a tecla do Air4 em que se deseja inserir o código que se acaba de aquisitar e mantê-la premida até o led se apagar.

Atenção: é necessário o procedimento na receptora (A.L.S. ou Original)

Afstandsbedieningen met **wisselende codes kopiëren met Air4 F-L-L IB-L2**


- 1 Houd **knop 1** van de Air4 ingedrukt.
- 2 Druk tegelijkertijd 4 keer op **knop 4**.
- 3 Laat beide knoppen van de Air4 los.
- 4 Het lampje van de Air4 afstandsbediening zal elke 2 seconden kort knipperen.
- 5 Plaats de te kopiëren afstandsbediening met de rug tegen de Air4.
- 6 Houd de te kopiëren knop van de originele afstandsbediening ingedrukt.
- 7 Wacht tot het lampje van de Air4 **snel begint te knipperen**. Dit betekent dat de code goedgekeurd is. Laat de knop van de originele afstandsbediening los.
- 8 Terwijl het lampje knippert, houd de Air4 knop waarnaar de code overgeplaatst moet worden ingedrukt tot het lampje uitgaat.

Opmerking: de ontvanger vereist een procedure (A.L.S./Originele procedure)



Air₄ Remotes Procedures

Copy Rolling Code Normal with Air4 V-Air4 Plus V(EU&IB)

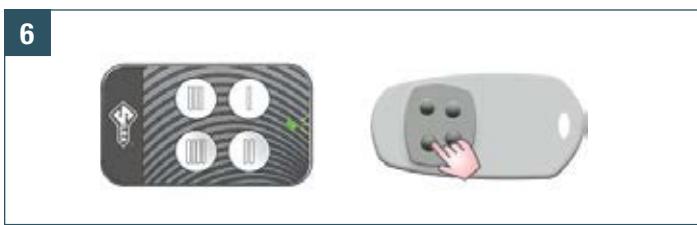

Copy Rolling Code normal remotes with Rolling Air4 V - Air4 Plus V (EU&IB)

- 1 Place the remote control to be cloned in front of the Air4, at a distance of about 2 centimetres.
- 2 Press and hold down **button 1** on the Air4 remote control.
- 3 At the same time press **button 4** four times.
- 4 Release both buttons of Air4 remote control.
- 5 Air4 remote control led will **flash briefly** about every 2 seconds.
- 6 Press and hold down the button to be copied from the original remote control and wait for the Air4 led to start **flashing rapidly**, which confirms that the code has been acquired. Release the original remote control's button.
- 7 While the led is flashing, press the Air4 button to which the code must be transferred and hold down until the led goes out.

Note: a procedure is required on the receiver (A.L.S./Original procedure)

Copia radiocomando Rolling Code normal con Air4 V - Air4 Plus V (EU&IB)

- 1 Posizionare il radiocomando da clonare di fronte a Air4 a circa 2 centimetri di distanza.
- 2 Premere e mantenere premuto il **tasto 1** del radiocomando Air4.
- 3 Contemporaneamente premere 4 volte il **tasto 4**.
- 4 Rilasciare entrambi i tasti del radiocomando.
- 5 Air4 emetterà un breve lampeggio ogni 2 secondi circa.
- 6 Premere e mantere premuto il tasto del radiocomando originale e attendere che il led di Air4 cambi lampeggio (**lampeggio più veloce**), a conferma del corretto apprendimento del codice. Rilasciare il tasto del radiocomando originale.
- 7 Mentre il led lampeggia, premere il tasto di Air4 sul quale si desidera inserire il codice appena appreso e mantenerlo premuto fino allo spegnimento.

Nota: è necessaria la procedura sulla ricevente (A.L.S. o Originale)

Kopieranleitung Funkfernbedienung Rollender Code normal mit Air4 V - Air4 Plus V (EU&IB)

- 1 Platzieren sie die zu kopierende Funkfernbedienung ca. 2 Zentimeter vor der Air4.
- 2 Drücken und halten Sie **Taste 1** an der Air4.
- 3 Gleichzeitig drücken Sie **Taste 4** viermal.
- 4 Beide Tasten der Air4 los lassen.
- 5 Air4 Funkfernbedienungsstatus LED blinkt nun langsam (alle 2 Sekunden).
- 6 Nun die zu kopierende Taste an der Originalfunkfernbedienung drücken. Warten, bis die Statusled an der Air4 **schnell blinkt**. Damit wird bestätigt, dass der Originalcode gelesen wurde. Die Taste an der original Funkfernbedienung nun los lassen.
- 7 Während die Statusled blinkt, jene Taste an der Air4 drücken, welche programmiert werden soll. Die Taste solange drücken, bis die LED erlischt.


Bemerkung: muss am Empfänger angelernt werden (A.L.S./Vorgehensweise Original)

Copier des télécommandes normales à code variable avec Air4 V - Air4 Plus V (EU&IB)

- 1 Placez la télécommande à reproduire face au Air4 à une distance d'environ 2 centimètres.
- 2 Maintenez le **bouton 1** de la télécommande Air4 appuyé.
- 3 Appuyez en même temps quatre fois sur le **bouton 4**.
- 4 Relâchez les deux boutons de la télécommande Air4.
- 5 La led de la télécommande Air4 clignotera brièvement toutes les 2 secondes environ.
- 6 Maintenez le bouton à copier de la télécommande originale appuyé et attendez que la led du Air4 commence à **clignoter rapidement**, ce qui confirme que le code a bien été acquis. Relâchez le bouton de la télécommande originale.
- 7 Pendant que la led clignote, appuyez sur le bouton du Air4 sur lequel le code doit être transféré et maintenez appuyé jusqu'à ce que la led s'éteigne.

Note: une procédure est requise sur le récepteur (A.L.S./procédure originale)

Copy Rolling Code Normal with **Air4 V-Air4 Plus V(EU&IB)**

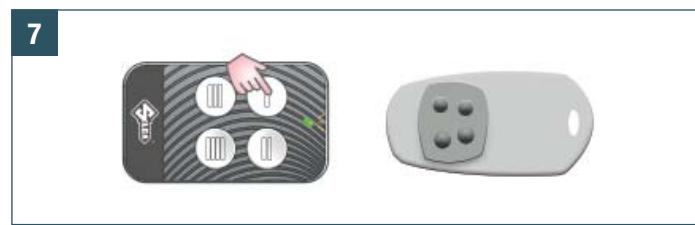

Copiar mandos **Rolling Code normal con Air4 V - Air 4 Plus V (EU&IB)**

- 1** Colocar el mando que se quiere clonar delante del Air4 a una distancia de unos 2 centímetros.
- 2** Pulsar y mantener apretado el **botón 1** del mando Air4.
- 3** Al mismo tiempo, apretar el **botón 4** cuatro veces.
- 4** Soltar ambos botones del mando Air4.
- 5** El led del mando Air4 parpadeará brevemente cada 2 segundos.
- 6** Pulsar y mantener apretado el botón que se quiere duplicar del mando original y esperar a que el led Air4 empiece a **parpadear rápidamente**, lo cual confirma que se ha adquirido el código. Soltar el botón del mando original.
- 7** Mientras el led parpadea, apretar el botón del Air4 donde se tiene que transferir el código. Mantener apretado hasta que el led se apague.

Aviso: se requiere un procedimiento en el receptor (A.L.S. o Original)

Afstandsbedieningen met **wisselende codes kopiëren met Air4 V - Air4 Plus V (EU&IB)**

- 1** Plaats de te kopiëren afstandsbediening voor de Air4 op een afstand van 2 cm.
- 2** Houd **knop 1** van de Air4 ingedrukt.
- 3** Druk tegelijkertijd 4 keer op **knop 4**.
- 4** Laat beide knoppen van de Air4 los.
- 5** Het lampje van de Air4 afstandsbediening zal elke 2 seconden kort knipperen.
- 6** Houd de te kopiëren knop van de originele afstandsbediening ingedrukt en wacht tot het lampje van de Air4 **snel begint te knipperen**. Dit betekent dat de code goedgekeurd is. Laat de knop van de originele afstandsbediening los.
- 7** Terwijl het lampje knippert, houd de Air4 knop waarnaar de code overgeplaatst moet worden ingedrukt tot het lampje uitgaat.

Opmerking: de ontvanger vereist een procedure (A.L.S./Originele procedure)

Cópia rádio controlo **Rolling Code normal com Air4 V - Air4 Plus V (EU&IB)**

- 1** Posicionar o rádio controlo a clonar perante o Air4 a uma distância de aprox. 2 cm.
- 2** Premir e manter premida a **tecla 1** do rádio controlo Air4.
- 3** Simultaneamente premir 4 vezes a **tecla 4**.
- 4** Soltar ambas as teclas do rádio controlo.
- 5** Air4 vai acender com intermitência breve em cada 2 segundos.
- 6** Premir e manter premida a tecla do rádio controlo original e aguardar que o led do Air4 mude intermitência (**luz intermitente mais rápida**) para confirmar que o código foi aquisitado correctamente. Soltar a tecla do rádio controlo original.
- 7** Enquanto o led piscar, premir a tecla do Air4 em que se deseja inserir o código que se acaba de aquisitar e mantê-la premida até o led se apagar.

Atenção: é necessário o procedimento na receptora (A.L.S. ou Original)



Air₄ Remotes Procedures

Rolling Secure Learning-BFT® Mitto with Air4 F-L-L IB-L2



Rolling Secure Learning remotes - BFT® Mitto with Air4 F-L-L IB-L2

- 1 Hold down **button 1** on the Air4 remote control.
- 2 At the same time press **button 4** four times.
- 3 Release both buttons.
- 4 The Air4 will flash briefly about every 2 seconds.
- 5 Place the remote control to be cloned back to back with Air4.
- 6 Hold down the original remote control button to be copied.
- 7 Wait for the Air4 led **to go on without flashing**, release button and then start double flashing about every 2 seconds.
- 8 Simultaneously press the two **buttons 1 and 2** on the BFT® remote control and release as soon as the led starts flashing (transmission of source code).
- 9 The Air4 led will flash rapidly; press the button on which the code will be memorised and hold down until the led goes out.
- 10 On older versions of BFT® Mitto instead of pressing the two buttons simultaneously, use a pin to press the concealed button on the back of the remote control.

Note: a procedure is required on the receiver (A.L.S./Original procedure)

Rolling Secure Learning - Procedure BFT® Mitto con Air4 F-L-L IB-L2

- 1 Premere e mantenere premuto il **tasto 1** di Air4.
- 2 Contemporaneamente premere 4 volte il **tasto 4**.
- 3 Rilasciare entrambi i tasti del radiocomando.
- 4 Il led di Air4 emetterà un breve lampeggio ogni 2 secondi circa.
- 5 Posizionare il radiocomando da clonare schiena a schiena con Air4.
- 6 Premere e mantenere premuto il tasto da copiare del radiocomando originale.
- 7 Attendere che il led di Air4 si **accenda a luce fissa**, rilasciare il tasto, per poi passare ad un doppio lampeggio ogni 2 secondi circa.
- 8 Premere contemporaneamente i **due tasti (1 e 2)** del radiocomando originale e rilasciarli quando il led inizierà a lampeggiare (trasmissione codice sorgente).
- 9 Il led di Air4 ora lampeggia velocemente, premere il tasto dove si vuole memorizzare il codice e mantenerlo premuto fino allo spegnimento del led.
- 10 Nelle vecchie versioni del BFT® Mitto, invece di premere contemporaneamente i due tasti, premere il tastino nascosto posto nel retro del radiocomando servendosi di uno spillino.

Nota: è necessaria la procedura sulla ricevente (A.L.S. o Originale)

Funkfernbedienung Rollender Code Secure mit BFT® Mitto mit Air4 F-L-L IB-L2

- 1 Drücken und halten Sie **Taste 1** an der Air4.
- 2 Gleichzeitig drücken Sie **Taste 4** viermal.
- 3 Beide Tasten der Air4 los lassen.
- 4 Air4 Funkfernbedienungsstatus LED blinkt nun langsam (alle 2 Sekunden).
- 5 Die zu kopierende Funkfernbedienung Rücken an Rücken zur Air4 positionieren.
- 6 Drücken Sie die zu kopierende Taste an der Originalfunkfernbedienung.
- 7 Warten, bis die LED an der Air4 leuchtet (**kein blinken**). Nun die Taste los lassen. Die LED beginnt nun zu blinken (alle 2 Sekunden).
- 8 Gleichzeitig die beiden **Tasten 1 und 2** auf der BFT® Funkfernbedienung drücken. Sobald die LED zu blinken beginnt, die beiden Tasten los lassen (Übertragung des Quellcodes).
- 9 Die LED blinkt nun schnell. Jetzt an der Air4 die zu programmierende Taste solange drücken, bis die LED erlischt.
- 10 Bei älteren Versionen der BFT® Mitto müssen Sie mit einer Nadel (z.B. Büroklammer) den Taster an der Rückseite drücken.

Bemerkung: muss am Empfänger angelernt werden (A.L.S./Vorgehensweise Original)

Télécommandes rolling secure learning avec BFT® Mitto avec Air4 F-L-L IB-L2

- 1 Maintenez le **bouton 1** de la télécommande Air4 appuyé.
- 2 En même temps, appuyez quatre fois sur le **bouton 4**.
- 3 Relâchez les deux boutons.
- 4 Le Air4 clignotera brièvement toutes les 2 secondes environ.
- 5 Placez la télécommande à reproduire dos à dos avec Air4.
- 6 Maintenez appuyé le bouton de la télécommande originale à reproduire.
- 7 Attendez que la led du Air4 **s'allume sans clignoter**, relâchez le bouton. La led commence alors à double-clignoter toutes les 2 secondes environ.
- 8 Appuyez simultanément sur les **boutons 1 et 2** de la télécommande BFT® et relâchez-les dès que la led commence à clignoter (transmission du code source).
- 9 La led du Air4 commencera à clignoter rapidement; appuyez sur le bouton pour lequel le code sera mémorisé et maintenez appuyé jusqu'à ce que la led s'éteigne.
- 10 Sur les anciennes versions du BFT® Mitto, au lieu d'appuyer sur les deux boutons simultanément, utilisez un trombone pour appuyer sur le bouton dissimulé au dos de la télécommande.

Note: une procédure est requise sur le récepteur (A.L.S./procédure originale)

Rolling Secure Learning-BFT[®] Mitto with Air4 F-L-L IB-L2



Mandos Rolling de aprendizaje seguro con BFT[®] Mitto con Air4 F-L-L IB-L2

- 1 Pulsar y mantener apretado el **botón 1** en el mando Air4.
- 2 Al mismo tiempo, apretar el **botón 4** cuatro veces.
- 3 Soltar ambos botones.
- 4 El mando Air4 parpadeará brevemente cada 2 segundos, aproximadamente.
- 5 Colocar el mando que se quiere clonar dorso a dorso con el Air4.
- 6 Mantener apretado el botón del mando original que se quiere duplicar.
- 7 Esperar que el led del mando Air4 **se encienda sin parpadear**, soltar botón y empezará el doble parpadeo cada 2 segundos, aproximadamente.
- 8 Simultáneamente, apretar los **dos botones 1 y 2** en el mando BFT[®] y soltar inmediatamente hasta que el led empiece a parpadear (transmisión de código fuente).
- 9 El led del mando Air4 parpadeará rápidamente; pulsar el botón dónde se memorizará el código y mantener apretado hasta que el led se apague.
- 10 En versiones anteriores del BFT[®] Mitto, en vez de apretar los dos botones simultáneamente, utilizar un alfiler o similar para apretar el botón oculto en el dorso del mando.

Aviso: se requiere un procedimiento en el receptor (A.L.S. o Original)

Wisselende Secure Learning Afstandsbedieningen BFT[®] Mitto met Air4 F-L-L IB-L2

- 1 Houd **knop 1** van de Air4 ingedrukt.
- 2 Druk tegelijkertijd 4 keer op **knop 4**.
- 3 Laat beide knoppen van de Air4 los.
- 4 Het lampje van de Air4 afstandsbediening zal elke 2 seconden kort knipperen.
- 5 Plaats de te kopiëren afstandsbediening met de rug tegen de Air4.
- 6 Houd de te kopiëren knop van de originele afstandsbediening ingedrukt.
- 7 Wacht tot het lampje van de Air4 blijft branden **zonder te knipperen** en nadien elke 2 seconden tweemaal knippert.
- 8 Houd **knop 1 en 2** tegelijkertijd ingedrukt op de BFT[®] afstandsbediening. Laat beide knoppen los zodra het lampje begint te knipperen (overzetten van de code).
- 9 Het lampje van de Air4 zal snel beginnen knipperen. Houd de knop om de code op te slaan ingedrukt tot het lampje uitgaat.
- 10 Gebruik een speld bij een oudere versie van de BFT[®] Mitto in plaats van op beide knoppen tegelijk te drukken. Hiermee wordt op de verborgen knop aan de achterkant van de afstandsbediening gedrukt.

Opmerking: de ontvanger vereist een procedure (A.L.S./Originele procedure)

Rádio Controlo Rolling secure learning BFT[®] Mitto com Air4 F-L-L IB-L2

- 1 Premir e manter premida a **tecla 1** do Air4.
- 2 Simultaneamente premir 4 vezes a **tecla 4**.
- 3 Soltar ambas as teclas do rádio controlo.
- 4 O led do Air4 vai acender com intermitência breve em cada 2 segundos.
- 5 Posicionar o rádio controlo a clonar com a parte traseira contra a parte traseira do Air4.
- 6 Premir e manter premida a tecla a copiar do rádio controlo original.
- 7 Aguardar che o led do Air4 **acenda de luz fixa**, soltar a tecla, para a seguir passar a uma intermitência dupla em cada 2 segundos.
- 8 Premir simultaneamente as duas **teclas 1 e 2** do rádio controlo original e soltá-las depois de aprox. 8 segundos (procedimento de transmissão do código fonte).
- 9 O led do Air4 agora pisca rapidamente, premir a tecla onde se deseja memorizar o código e mantê-la premida até o led se apague.
- 10 Nas versões antigas do BFT[®] Mitto, em vez de premir simultaneamente as duas teclas, premir a pequena tecla escondida que se encontra na parte traseira do rádio controlo, utilizando um alfinete.

Atenção: é necessário o procedimento na receptora (A.L.S. ou Original)



Air₄ Remotes Procedures

Rolling Secure Learning - FAAC® 433/868 MASTER with Air4

1 Air4 V - Air 4 Plus V (EU&IB)



6



9




2 3



4 5



7



8



10



Rolling Secure Learning remotes - FAAC® 433/868 Master with Air4 V - Air 4 Plus V (EU&IB)-L2

- 1 Place the remote to be cloned in front of Air4 at a distance of about 1/12 cm.
- 2 Hold down **button 1** on Air4.
- 3 At the same time press **button 4** four times.
- 4 Release both buttons on Air4.
- 5 Air4 led will flash briefly about every 2 seconds.
- 6 Hold down the button on the original remote to be copied. Wait for the Air4 led to go on without flashing, release button and then start double flashing about every 2 seconds.
- 7 Simultaneously press the two **buttons 1 and 2** on the FAAC® 433/868 remote and **release** as soon as the led begins to flash (transmission of source code).
- 8 While the FAAC® 433/868 remote is flashing, press once the button to be copied.
- 9 The led will then flash rapidly, press the button on which the code will be saved and hold down until the led goes out.
- 10 Approach the automation and press the Air4 remote repeatedly until the automation activates.

Funkfernbedienung Rollender Code Secure mit FAAC® 433/868 Master mit Air4 V - Air4 Plus V (EU&IB)-L2

- 1 Platzieren Sie die zu kopierende Funkfernbedienung ca. 1 bis 12 Zentimeter vor der Air4.
- 2 Drücken und halten Sie **Taste 1** an der Air4.
- 3 Gleichzeitig drücken Sie **Taste 4** viermal.
- 4 Beide Tasten der Air4 los lassen.
- 5 Air4 Funkfernbedienungsstatus LED blinkt nun langsam (alle 2 Sekunden).
- 6 Taste an der FAAC Funkfernbedienung gedrückt lassen. Warten, bis an der Air4 die LED angeht (kein blinken). Die LED an der Air4 beginnt zu blinken (doppellicht alle 2 Sekunden).
- 7 Gleichzeitig die beiden **Tasten 1 und 2** auf der FAAC® 433/868 Funkfernbedienung drücken. Sobald die LED zu blinken beginnt, die beiden Tasten los lassen (Übertragung des Quellcodes).
- 8 Während die FAAC® 433/868 Funkfernbedienung blinkt, die zu kopierende Taste drücken.
- 9 Die LED blinkt nun schnell. Jetzt an der Air4 die zu programmierende Taste solange drücken, bis die LED erlischt.
- 10 Gehen Sie nun zum Empfänger (Schranke, Rolltor, ...) und drücken Sie die Taste der Air4 mehrmals, bis der Empfänger das Signal angenommen hat.


Rolling Secure Learning - Procedure FAAC® 433/868 Master con Air4 V - Air 4 Plus V (EU&IB)-L2

- 1 Posizionare il telecomando da clonare di fronte a Air4 a circa 1/12 centimetri di distanza.
- 2 Premere e mantenere premuto il **tasto 1** del telecomando.
- 3 Contemporaneamente premere 4 volte il **tasto 4**.
- 4 Rilasciare entrambi i tasti del telecomando.
- 5 Air4 emetterà un breve lampeggio ogni 2 secondi circa.
- 6 Premere e mantenere premuto il tasto del telecomando originale e attendere che il led di Air4 si accenda a luce fissa, rilasciare il tasto per poi passare ad un doppio lampeggio ogni 2 secondi circa.
- 7 Premere contemporaneamente i **tasti 1 e 2** del telecomando FAAC® 433/868 e **rilasciarli** quando il led inizierà a lampeggiare (trasmissione codice sorgente).
- 8 Mentre il led del telecomando FAAC® 433/868 lampeggia premere una volta il tasto che si desidera duplicare del telecomando originale.
- 9 Ora il led di Air4 lampeggia veloce; premere il tasto dove si vuole memorizzare il codice e mantenerlo premuto fino allo spegnimento del led.
- 10 Avvicinarsi all'automazione e premere più volte il tasto di Air4 fino all'attivazione della stessa.

Télécommandes rolling secure learning avec FAAC® 433/868 Master avec Air4 V - Air4 Plus V (EU&IB)-L2

- 1 Placez la télécommande à reproduire face au Air4 à une distance d'environ 1/12 cm.
- 2 Maintenez le **bouton 1** du Air4 appuyé.
- 3 En même temps, appuyez quatre fois sur le **bouton 4**.
- 4 Relâchez les deux boutons du Air4.
- 5 La led du Air4 commence alors à clignoter brièvement toutes les 2 secondes environ.
- 6 Maintenez appuyé le bouton de la télécommande originale à reproduire. Attendez que la led du Air4 s'allume sans clignoter puis relâchez le bouton. La led commence alors à double clignoter toutes les 2 secondes environ.
- 7 Appuyez simultanément sur les **boutons 1 et 2** de la télécommande FAAC® 433/868 et **relâchez** dès que la led commence à clignoter (transmission du code source).
- 8 Lorsque la télécommande FAAC® 433/868 clignote, appuyez une fois sur le bouton à copier.
- 9 La led clignotera alors rapidement, appuyez sur le bouton sur lequel le code sera mémorisé et maintenez jusqu'à ce que la led s'éteigne.
- 10 Approchez-vous du système d'automatisation et appuyez sur la télécommande Air4 de manière répétée jusqu'à ce que le système d'automatisation s'active.

Rolling Secure Learning - FAAC® 433/868 MASTER with Air4

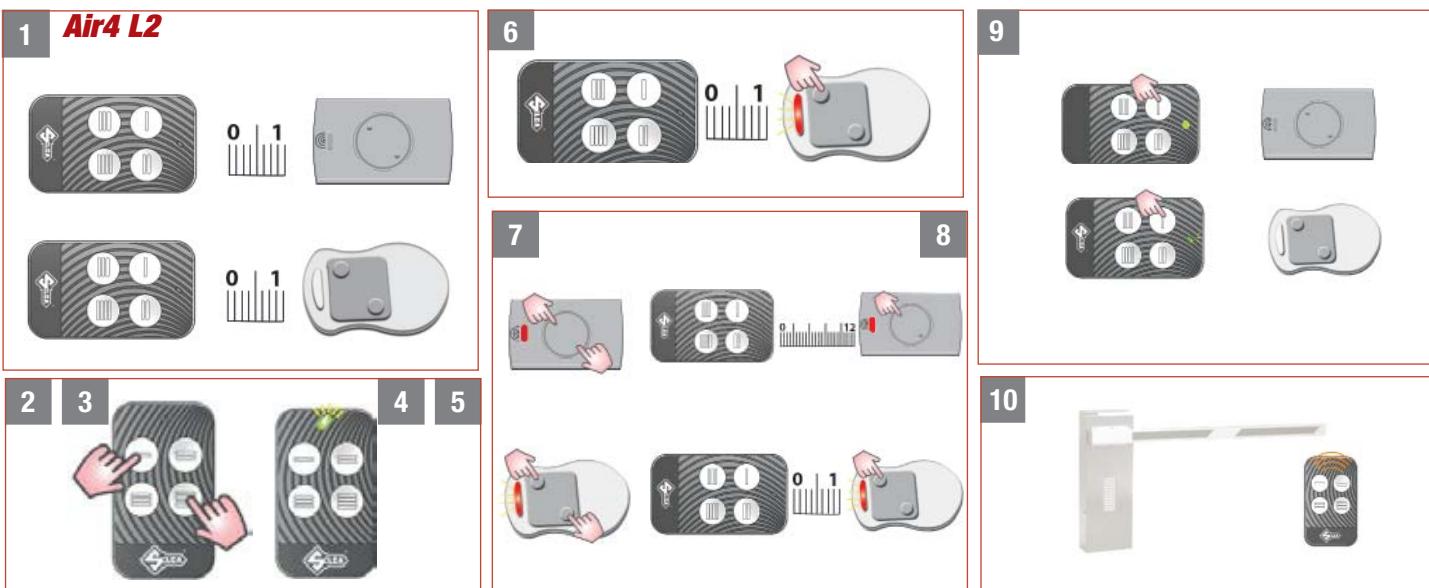

Mando Rolling de aprendizaje seguro con FAAC® 433/868 Master con Air4 V - Air4 Plus V (EU&IB)-L2

- 1 Colocar el mando que se quiere clonar delante de Air4 a una distancia de unos 1/12 cm.
- 2 Pulsar y mantener apretado el **botón 1** en el mando Air4.
- 3 Al mismo tiempo, pulsar el **botón 4** cuatro veces.
- 4 Soltar ambos botones en Air4.
- 5 Led Air4 parpadeará brevemente cada 2 segundos aproximadamente.
- 6 Pulsar botón en mando original que se quiere duplicar. Esperar que led Air4 funcione sin parpadear, soltar botón que empezar a parpadear doble cada 2 segundos.
- 7 Simultáneamente, pulsar los dos **botones 1 y 2** en el mando FAAC® 433/868 y **soltar** inmediatamente hasta que el led empiece a parpadear (transmisión de código fuente).
- 8 Mientras el mando FAAC® 433/868 parpadea, pulsar el botón que se quiere duplicar una vez.
- 9 Entonces el led empezará a parpadear rápidamente. Apretar el botón dónde se guardará el código y mantener apretado hasta que el led se apague.
- 10 Acercarse al receptor automático y pulsar mando Air4 repetidamente hasta que el receptor automático se active.

Wisselende Secure Learning Afstandsbedieningen FAAC® 433/868 Master met Air4 V - Air4 Plus V (EU&IB)-L2

- 1 Plaats de te kopiëren radiografische besturing voor de Air4 op een afstand van ongeveer 1 à 12 cm.
- 2 Houd **knop 1** van de Air4 ingedrukt.
- 3 Druk tegelijkertijd 4 keer op **knop 4**.
- 4 Laat beide knoppen van de Air4 los.
- 5 Het lampje van de Air4 afstandsbediening zal elke 2 seconden kort knipperen.
- 6 Houd de knop van de te kopiëren afstandsbediening ingedrukt. Wacht tot het lampje van de Air4 blijft branden zonder te knipperen. Laat de knop los, nadien knippert het lampje elke 2 seconden tweemaal.
- 7 Houd **knop 1 en 2** tegelijkertijd ingedrukt op de FAAC® 433/868 afstandsbediening. **laat** beide knoppen los zodra het lampje begint te knipperen (overzetten van de code).
- 8 Druk 1 keer op de te kopiëren knop terwijl de FAAC® 433/868 afstandsbediening knippert.
- 9 Het lampje van de Air4 zal snel beginnen knipperen. Houd de knop om de code op te slaan ingedrukt tot het lampje uitgaat.
- 10 Nader het automatiseringssysteem en druk meermaals op de Air4 afstandsbediening om het automatiseringssysteem te activeren.

Rádio Controlo Rolling secure learning FAAC® 433/868 Master com Air4 V - Air4 Plus V (EU&IB)-L2

- 1 Posicionar o rádio controlo a clonar perante o Air4 a uma distância de aprox. 1/12 cm.
- 2 Premir e manter premida a **tecla 1** do rádio controlo.
- 3 Simultaneamente premir **4 vezes** a tecla 4.
- 4 Soltar ambas as teclas do rádio controlo.
- 5 Air4 vai acender com intermitência breve em cada 2 segundos.
- 6 Premir e manter premida a tecla do rádio controlo original e aguardar que o led do Air4 acenda de luz fixa, soltar a tecla, para passar a seguir a uma intermitência dupla em cada 2 segundos aprox.
- 7 Premir simultaneamente as **teclas 1 e 2** do rádio controlo FAAC® 433/868 Master e **soltá-las** quando o led começará a piscar (transmissão código fonte).
- 8 Enquanto o led do rádio controlo FAAC® 433/868 piscar, premir uma vez a tecla que se deseja duplicar do rádio controlo original.
- 9 O led do Air4 agora piscá rapidamente, premir a tecla onde se deseja memorizar o código e mantê-la premida até o led se apagar.
- 10 Aproximar-se da automação e premir mais vezes a tecla do Air4 até à activação da mesma.



Air₄ Remotes Procedures

A.L.S. Procedure

1 2 3



UK A.L.S. Procedure

A simplified procedure to activate the remote control in the relevant receiver only if the "via radio or remote save" function is activated.

If not, consult the instructions for the original remote control.

Do not use the original remote control before activating the A.L.S. procedure on the Silca Air4 remote control.

1 Stand close to the automation.

2 Hold down the programme button for about 10 seconds; release when the led starts to flash.

3 Wait until the led goes out.

⚠ Receivers may have the radio channel disabled, in such cases enter the new remote controls using a manual procedure. From that moment both the remote controls (original and Silca Air4) will work properly on the automation.

IT Procedura A.L.S.

Procedura semplificata per attivare il radiocomando nella ricevente.

Valida solo se la funzione **via radio o memorizzazione remota è attivata**. In caso contrario avatarsi delle istruzioni del radiocomando originale.

Non utilizzare il radiocomando originale prima di avere attivato la procedura A.L.S. sul radiocomando Silca Air4.

1 Posizionarsi in prossimità dell'automazione (ricevente).

2 Mantenere premuto il tasto del radiocomando programmato per 10 secondi circa. Quando il led comincia a lampeggiare rilasciare il tasto.

3 Attendere lo spegnimento del led.

⚠ Le riceventi possono avere la via radio disabilitata, in questi casi è necessario inserire i nuovi radiocomandi con procedura manuale. Attenersi alle istruzioni rilasciate dal produttore e/o installatore della ricevente in uso.

DE A.L.S. Vorgehensweise

Eine vereinfachte Vorgehensweise, um die Funkfernbedienung am entsprechenden Empfänger anzulernen. Dies ist nur möglich, wenn am Empfänger diese Funktion aktiviert ist. Falls nicht, bitte in der Bedienungsanleitung des Herstellers nachlesen, wie die Funkfernbedienung angelernt werden kann.

Bitte die Originalfunkfernbedienung solange nicht benutzen bis die Silca Funkfernbedienung Air4 mittels A.L.S. angelernt wurde.

1 Gehen sie zum Empfänger.

2 Die anzulernende Taste für ca. 10 Sekunden drücken. Wenn die LED zu blinken beginnt, die Taste los lassen.

3 Warten bis die LED erlischt.

⚠ Der Empfänger hat möglicherweise die Funktion A.L.S. nicht aktiviert. In diesem Fall muss die Funkfernbedienung mittels manuellem Programmierungsvorgang angelernt werden.

Danach funktionieren beide Funkfernbedienungen (original und Silca Air4) am Empfänger.

FR Procédure A.L.S.

Procédure simplifiée pour activer la télécommande dans le récepteur opportun uniquement si la fonction "enregistrer par radio ou télécommande" est activée.

Dans le cas contraire, consultez les instructions pour la télécommande originale.

Utilisez la télécommande originale uniquement après avoir activé la procédure A.L.S. dans la télécommande Silca Air4.

1 Restez près du système d'automatisation.

2 Maintenez le bouton du programme appuyé pendant environ 10 secondes, relâchez lorsque la led commence à clignoter.

3 Attendez jusqu'à ce que la led s'éteigne.

⚠ Il est possible que le canal radio des récepteurs soit désactivé. Dans ce cas, entrez les nouvelles télécommandes par une procédure manuelle.

À partir de ce moment, les deux télécommandes (originale et Silca Air4) fonctionneront correctement lors de l'automatisation.

A.L.S. Procedure

1 2 3



Procedimiento A.L.S.

Procedimiento simplificado para activar el mando en el receptor correspondiente, sólo en casos en los cuales se ha activado la función "por radio" o "guardar remoto". En caso contrario, consultar instrucciones del mando original.

No utilizar el mando original antes de activar procedimiento A.L.S. en el mando Silca Air44.

- 1 Acerarse al receptor automático.
- 2 Pulsar y mantener apretado el botón "programa" durante unos 10 segundos; soltar cuando el led empieza a parpadear.
- 3 Esperar hasta que el led se apague.

⚠ El canal radiofónico del receptor puede estar desactivado. En tal caso, introducir los nuevos controles remotos manualmente. Desde este momento, los dos mandos (original y Silca Air4) funcionarán correctamente en el receptor automático.

Procedimento A.L.S.

Procedimento simplificado para activar o rádio controlo na receptora válido somente se a função "via rádio ou memorização remota" foi activada.

Caso contrário, utilizar as instruções do rádio controlo original.

Não utilizar o rádio controlo original antes de ter activado o procedimento A.L.S. no rádio controlo Silca Air4.

- 1 Posicionar-se nas proximidades da automação (receptora).
- 2 Manter premida a tecla do rádio controlo programado durante aprox. 10 segundos. Quando o led começa a piscar, soltar a tecla.
- 3 Aguardar que o led se apague.

⚠ As receptoras podem ter a via rádio desabilitada, nesses casos é necessário inserir os novos rádio controlos com o procedimento manual. Seguir as instruções dadas pelo fabricante e/ou instalador da receptora utilizada.

A.L.S. Procedure

Een vereenvoudigde procedure om de afstandsbediening in de gewenste ontvanger te activeren; enkel en alleen mogelijk als de functie "via radio of afstandsbediening" geactiveerd is.

Zo niet, raadpleeg de instructies bij de originele afstandsbediening.

Gebruik de originele afstandsbediening niet alvorens de A.L.S. procedure op de afstandsbediening van de Silca Air4 te activeren.

- 1 Ga naast het automatiseringssysteem staan.
- 2 Houd de programmaknop ingedrukt gedurende 10 seconden; laat de knop los wanneer het lampje begint te knipperen.
- 3 Wacht tot het lampje uitgaat.

⚠ Bij sommige ontvangers is het radiokanaal uitgeschakeld. Krijg in dit geval toegang tot de nieuwe afstandsbedieningen door een manuele procedure te gebruiken.

Vanaf dat moment zullen beide afstandsbedieningen (de originele en de Air4) naar behoren werken op het automatiseringssysteem.



Air₄ Remotes Procedures

Manual saving on the receiver

| Key® Sub 44R | Novoferm® | Proem® | Seav® RS3 Be Happy |
|--------------|------------------|--|--------------------|
| | | | |
| Siminor® | Sommer® 4020 868 | Ballan® Dea® Mio Genie® Telcoma® FM402/FM404 | Nice® One |
| | | | |

Manual saving on the receiver

Press and release the **P1 button** on the receiver.

While the receiver led is flashing hold down the Silca Air4 remote control button until the led on the receiver changes flashing mode. Wait 10 seconds and test operation.

Programmieranleitung am Empfänger

Drücken Sie die **P1 Taste** am Empfänger.

Während am Empfänger die LED blinks, drücken Sie die Air4 Funkfernbedienungstaste solange, bis sich der Blinkmodus an der LED des Empfängers ändert. Nun 10 Sekunden warten und die neue Funkfernbedienung testen.

Guardar manualmente en el receptor

Pulsar y soltar el **botón P1** en el receptor.

Mientras el receptor led parpadea, apretar el botón Air4 del mando Silca hasta que el led en el receptor cambie el modo de parpadear.

Esperar 10 segundos y entonces comprobar que esté operativo.

Handleiding: opslaan op de ontvanger

Druk op **knop P1** van de ontvanger en laat onmiddellijk los.

Terwijl het lampje van de ontvanger knippert, houd de knop van de Air4 afstandsbediening ingedrukt tot het lampje op de ontvanger stopt met knipperen. Wacht 10 seconden en voer een test uit.

Memorizzazione manuale in ricevente

Premere e rilasciare il **tasto P1** posto sulla ricevente.

Mentre il led del ricevitore lampeggia, premere il tasto del radiocomando Silca Air4 fino a che il led ricevitore cambia lampeggio. Attendere 10 secondi e provare il corretto funzionamento.

Mémorisation manuelle sur le récepteur

Appuyez sur le **bouton P1** du récepteur, puis relâchez.

Lorsque la led du récepteur clignote, maintenez le bouton de la télécommande Silca Air4 appuyé jusqu'à ce que le mode de clignotement de la led du récepteur change. Attendez 10 secondes et vérifiez le fonctionnement.

Memorização manual na receptora

Premir e soltar a **tecla P1** que se encontra na receptora

Enquanto o led da receptora piscar, premir a tecla do rádio controlo Silca Air4 até o led da receptora mudar de intermitência.

Aguardar 10 segundos e provar se funciona correctamente.



Contents

Indice

Inhalt

Sommaire

Sumario

Sumário

Inhoud

Air4 L

| | | | | | | | |
|---------------------|----|----------------------------|----|-------------------------------------|----|-----------------|----|
| ADYX® | | BENINCA® | | DW-2 | 25 | DUCATI® | |
| 433-HG BRAVO | 1 | APPLE | 14 | MOVICODE | 25 | TE2 | 37 |
| TE443H BLUE | 1 | CUPIDO 2/4 | 14 | RW-2 | 25 | TPR | 38 |
| TM-433 | 1 | IO.2WV BLUE | 14 | SAW | 26 | TSAW | 38 |
| | | IO.2WV ORANGE | 14 | X-2 | 26 | TSAWN | 38 |
| AERF® | | LOT W | 15 | | | | |
| BT | 1 | LOT WMS | 15 | | | | |
| HY-DOM | 1 | LOT XW | 15 | CHAMBERLAIN/LIFT MASTER/M... | | E-KING® | |
| MARS | 1 | LOT2WCV | 15 | 433EML | 27 | 433 | 38 |
| MERCURY B | 2 | ROLLKEY | 15 | 433EML | 27 | 433 II | 38 |
| MERCURY C | 2 | T4 WV | 15 | G433OE | 28 | 433-M | 38 |
| SATURN | 2 | TO.G02 WV | 15 | | | | |
| TTS | 3 | TO.G04 WV | 15 | | | | |
| | | TO.G0WP | 16 | CLEMSA® | | ECE® | |
| ALFA TORRES® | | TW4 K | 16 | DIGICODE MH | 28 | 433 TX4 | 38 |
| RT1 - RT2 ALFA | 3 | | | MH | 30 | ECE 433 | 39 |
| | | | | MH-E | 30 | | |
| ALLMATIC® | | BERNAL® | | CYACSA® | | ECOSTAR® | |
| B.R0 2WN | 4 | SKJ | 17 | NEO | 31 | 40 | 39 |
| B.R0 3WN | 4 | SKX MD | 17 | TWIN | 31 | | |
| B.R0 4WN | 4 | | | EINHELL® | | | |
| B.R0 OVER | 4 | BERNER TORANTRIEBE® | | ZERO 2 RC | 31 | HS433 | 39 |
| B.R0 WN RED | 4 | SKX MD | 17 | ZERO 4 RC | 31 | | |
| MINIPASS | 5 | | | DASPI® | | ELBE® | |
| PASS | 5 | BFT® | | ZERO 2 RC | 31 | 50 | 39 |
| TECH3 | 5 | GHIBLI | 17 | ZERO 4 RC | 31 | | |
| | | KLEIO | 17 | | | | |
| ALLTRONIK® | | MITTO 2 | 17 | DEA SYSTEM® | | ELKA® | |
| S425 | 6 | MITTO 2/4A | 17 | GENIE R 273 | 32 | SKX | 40 |
| | | MITTO 2/4M | 17 | GENIE S | 32 | | |
| ALULUX® | | MITTO 4 | 18 | GENIE S 263L | 32 | EMFA® | |
| DIGITAL 302 | 6 | MITTO RCB02 | 18 | GOLD 238 S1 | 32 | MAP433 | 41 |
| | | MITTO RCB04 | 18 | GOLD 238 S2 | 32 | NEO | 41 |
| ANSONIC® | | RB MURALE | 18 | GOLD 239 S4 | 32 | TWIN | 42 |
| SA434 | 7 | TE01 | 18 | GOLD R | 32 | | |
| | | TE04 | 18 | MIO TD | 32 | ERONE® | |
| APERTO® | | TRC 2/4 | 18 | PUNTO 268 | 33 | OVALI | 42 |
| CPS | 8 | | | PUNTO 278 | 33 | | |
| | | CAME® | | TR2/4 | 33 | ERREKA® | |
| APRIMATIC® | | TOP432EV | 19 | DELMA® | | LUNA | 43 |
| TM4 | 8 | TOP432NA | 19 | APOLLO-433-4 | 33 | MC | 44 |
| TR2 | 9 | TOP432S | 19 | APOLLO-433-4 NEW | 33 | RESON 2 | 44 |
| TR4 | 9 | TOP432SA | 19 | KING-433 | 33 | RESON 4 | 44 |
| TXM | 9 | TOP434A | 20 | MIZ-433 | 33 | SGOX | 45 |
| | | TOP434M | 20 | | | SMAT | 45 |
| ATODOR® | | TWIN | 20 | DICKERT® | | FAAC® | |
| G4330 E | 9 | | | IAMS 433 | 34 | TE433 HG | 46 |
| G4332 E | 9 | CARDALE DOORS® | | IS-433 | 35 | TML2 433 SLR | 47 |
| G4333 E | 9 | 433 | 20 | MAHS433 | 35 | TML4 433 SLR | 47 |
| G4335 E | 9 | 433 II | 20 | S10 -433-AL | 35 | XT4 433RC-BE | 47 |
| | | 433-M | 20 | S10 AL | 35 | | |
| B&B® | | | | S20-433-AL | 35 | FADINI® | |
| EMY N | 11 | CARDIN® | | S5-433-AL | 36 | ASTRO 433 | 47 |
| | | S438 TX | 20 | | | ASTRO 433M | 47 |
| B&D® | | | | DITEC® | | JUBI 433 | 48 |
| 62170 | 11 | BE HAPPY S 1P | 22 | BIX LS2 | 36 | JUBI 433/2 TR | 48 |
| PTX4 | 11 | BE HAPPY S 2P | 23 | GOL4C | 36 | JUBI SMALL | 48 |
| BECKER® | | BE HAPPY S 3P | 23 | | | FORSA® | |
| MICRO | 12 | BE HAPPY S AZUL 1P | 23 | DMIL® | | BUTTERFLY | 48 |
| | | BE HAPPY S AZUL 2P | 23 | NEO10 DMIL | 36 | RT1 | 48 |
| BELFOX® | | BE HAPPY S AZUL 3P | 23 | TWIN | 37 | RT4 | 49 |
| 773 | 13 | ERTS4C | 23 | DOORMATIC® | | TWIN | 49 |
| DHS 7 | 14 | | | AZ-433 | 37 | TXE | 49 |
| | | CELINSA® | | EURO | 37 | GENIUS® | |

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.



Air4 Residential Remotes

Air4 L

| | | | | | | | |
|-------------------------|----|-----------------------|----|------------------|----|-----------------|----|
| BRAVO TE4433H | 50 | TX3 | 60 | PUJOL® | | SM | 81 |
| ECHO | 50 | | | NEO | 70 | | |
| JA40 | 50 | MOOVO® | 60 | TWIN | 70 | TELCOMA® | |
| | | MT4 | | VARIO 3 BLACK | 71 | EDGE | 82 |
| GIBIDI® | | | | VARIO 3 OCEAN | 71 | NOIRE E | 82 |
| AU1600 | 50 | MOTORSTAR® | 61 | VARIO MARS | 71 | TANGO SLIM | 83 |
| AU1600 WOOD | 50 | CLIKSTAR 53 | | QUASAR® | | V2® | |
| AU1680 | 50 | | | BETA | 71 | TPR-43KF | 84 |
| AU1680 WOOD | 50 | NICE® | 62 | ETA | 71 | VDS® | |
| AU3000 DOMINO | 50 | ERA-FLO1R | 62 | TX S433 2 | 71 | ECO-R | 84 |
| AU01590 | 51 | ERA-FLO2R | 62 | RIB® | | TRQ 2P/4P | 84 |
| | | ERA-FLO4R | 63 | LITHIO | 71 | | |
| GIBIDI/OPEN OUT® | | ERGO | 63 | MOON | 72 | | |
| TMB | 51 | FL01 | 63 | SUN | 72 | | |
| GOBBATO® | | FL01R-S | 63 | ROGER® | | | |
| RAD/B2S | 51 | FL02 | 63 | TX10 | 72 | | |
| | | FL02R-S | 63 | TX22 | 72 | | |
| GR® | | FL04 | 63 | ROLLTORE® | | | |
| GR 433 | 52 | FL04R-S | 63 | MPSTFE | 72 | | |
| | | SMILO SM2 | 64 | SABUTOM® | | | |
| | | SMILO SM4 | 64 | BROOVER 3P | 73 | | |
| GULLIVER® | | VERY VR | 64 | BROSTAR | 73 | | |
| MDW/2 | 52 | NOLOGO® | 64 | SEA® | | | |
| | | SMILE-R | | EC 433 | 74 | | |
| JCM® | | NORTON® | 65 | SMART DUAL | 75 | | |
| NEO DMIL | 54 | NEO40-NTN | 65 | SMART DUAL 433 | 75 | | |
| NEO EMFA | 55 | NOVOFERM® | | SEAV® | | | |
| NEO FORSA | 55 | HS 43-1E | 65 | BE HAPPY RS1 NEW | 75 | | |
| NEO PUYOL | 55 | M512 | 65 | BE HAPPY RS2 NEW | 75 | | |
| NEO SERVIPARKING | 55 | MCHS | 65 | BE HAPPY RS3 NEW | 75 | | |
| NEO20 SEC | 55 | MICRO-NOVOTRON 312 | 65 | BE HAPPY S1 | 75 | | |
| TWIN | 56 | MICRO-NOVOTRON 512 | 65 | BE HAPPY S2 | 75 | | |
| | | MINI-NOVOTRON 302 | 65 | BE HAPPY S3 | 75 | | |
| KEY® | | MINI-NOVOTRON 402 | 66 | SIMBA® | | | |
| 900SUB 44WR | 56 | MINI-NOVOTRON 502 | 66 | RC | 76 | | |
| 900TXB-42R | 56 | MINI-NOVOTRON 504 | 66 | SIMINOR® | | | |
| TXB 44R | 56 | MNHS | 66 | CVX | 76 | | |
| TXG 44R | 56 | NOVOTRON | 66 | SOMFY® | | | |
| LABEL® | | NOVOTRON 202 MB | 66 | CVX | 77 | | |
| SPYCO-1 | 56 | NOVOTRON 502 MAX 43-2 | 66 | TS 433 | 78 | | |
| SPYCO-3 | 57 | NOVOTRON 504 MAX 43-4 | 66 | STAGNOLI® | | | |
| LEB® | | O&O® | | KALLISTO | 80 | | |
| TCP 2 | 57 | ELIOT | 67 | VENUS AV223 | 80 | | |
| TCP 3 | 57 | RAY | 67 | ZEUS AZ442 | 80 | | |
| TMW | 57 | T.COM R4-2 | 67 | TAU® | | | |
| TMW | 57 | TX | 67 | 250 K SLIM | 80 | | |
| LUTEC® | | PORTAMATIC® | | 250-BUG 2 | 80 | | |
| TRC4 | 58 | MPH | 67 | 250-BUG 4 | 80 | | |
| MARANTEC® | | PRASTEL® | | TEDSEN® | | | |
| 21R | 58 | MPSTFE | 68 | SKJ | 81 | | |
| D23 | 59 | MPSTFE 2RE | 69 | SKX | 81 | | |
| DIGITAL 21 | 59 | MPSTFE RJ | 69 | | | | |
| DIGITAL 30 868 | 59 | PROEM® | | | | | |
| MEDVA® | | ERC/ACD | 70 | | | | |
| UNITECH-3E | 59 | | | | | | |
| MHOUSE® | | | | | | | |
| GTX4 | 60 | | | | | | |
| TX-3-4 | 60 | | | | | | |

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.

Air4 L (IB)

| | | | | | |
|--------------|---|-----------------------|----|--------------------|----|
| ADYX® | | BECKER® | | DITEC® | |
| 433-HG BRAVO | 1 | MICRO | 12 | BE HAPPY S 3P | 23 |
| TE443H BLUE | 1 | | | BE HAPPY S AZUL 1P | 23 |
| TM-433 | 1 | | | BE HAPPY S AZUL 2P | 23 |
| | | | | BE HAPPY S AZUL 3P | 23 |
| AERF® | | BELFOX® | | DMIL® | |
| BT | 1 | 773 | 13 | ERTS4C | 23 |
| HY-DOM | 1 | DHS 7 | 14 | | |
| MARS | 1 | | | DOORMATIC® | |
| MERCURY B | 2 | BENINCA® | | AZ-433 | 37 |
| MERCURY C | 2 | APPLE | 14 | EURO | 37 |
| SATURN | 2 | CUPIDO 2/4 | 14 | MILENY | 37 |
| TTS | 3 | IO.2WV BLUE | 14 | | |
| | | IO.2WV ORANGE | 14 | | |
| | | LOT W | 15 | DUCATI® | |
| | | LOT WMS | 15 | TE2 | 37 |
| | | LOT XW | 15 | TPR | 38 |
| | | LOT2WCV | 15 | TSAW | 38 |
| | | ROLLKEY | 15 | TSAWN | 38 |
| | | T4 WV | 15 | | |
| | | TO.G02 WV | 15 | E-KING® | |
| | | TO.G04 WV | 15 | 433 | 38 |
| | | MINIPASS | 16 | 433 II | 38 |
| | | TO.GOWP | 16 | 433-M | 38 |
| | | PASS | 16 | | |
| | | TW4 K | 16 | ECE® | |
| | | | | 433 TX4 | 38 |
| | | BERNAL® | | ECE 433 | 39 |
| | | SKJ | 17 | | |
| | | SKX MD | 17 | ECOSTAR® | |
| | | | | 40 | 39 |
| | | ALULUX® | | EINHELL® | |
| | | DIGITAL 302 | 6 | HS433 | 39 |
| | | | | ELBE® | |
| | | ANSONIC® | | 50 | 39 |
| | | SA434 | 7 | | |
| | | APERTO® | | ELEMAT® | |
| | | CPS | 8 | EL2 PLUS | 39 |
| | | | | ELKA® | |
| | | APRIMATIC® | | SKX | 40 |
| | | TM4 | 8 | | |
| | | TR2 | 9 | EMFA® | |
| | | TR4 | 9 | MAP433 | 41 |
| | | TXM | 9 | NEO | 41 |
| | | | | TWIN | 42 |
| | | ATODOR® | | | |
| | | G4330 E | 9 | ERONE® | |
| | | G4332 E | 9 | OVALI | 42 |
| | | G4333 E | 9 | | |
| | | G4335 E | 9 | ERREKA® | |
| | | | | IRIS 2/4 433 | 43 |
| | | AVIDSEN® | | LIRA 433 | 43 |
| | | 104250 | 10 | LUNA | 43 |
| | | 104250 OLD2 | 10 | MC | 44 |
| | | 104250 RED | 10 | RESON 2 | 44 |
| | | 104251 | 10 | RESON 4 | 44 |
| | | 104257 | 10 | ROLLER 2 433 | 44 |
| | | 104350 | 11 | SGOX | 45 |
| | | 654250 | 11 | SMAT | 45 |
| | | | | SOL 2R/4R 433 | 45 |
| | | B&B® | | VEGA 2/4 433 | 45 |
| | | EMY N | 11 | | |
| | | | | | |
| | | CARDALE DOORS® | | | |
| | | 433 | 20 | | |
| | | 433 II | 20 | | |
| | | 433-M | 20 | | |
| | | | | | |
| | | CARDIN® | | | |
| | | S438 TX | 20 | | |
| | | | | | |
| | | CASIT® | | | |
| | | BE HAPPY S 1P | 22 | | |
| | | BE HAPPY S 2P | 23 | | |
| | | | | | |

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.



Air4 Residential Remotes

Air4 L (IB)

| | | | | | | | |
|-------------------------|----|-----------------------|----|------------------|----|-----------------|----|
| FAAC® | | TMW | 57 | PRASTEL® | | ZEUS AZ442 | 80 |
| TE433 HG | 46 | | | MPSTFE | 68 | | |
| TML2 433 SLR | 47 | MARANTEC® | | MPSTFE 2RE | 69 | TAU® | |
| TML4 433 SLR | 47 | 21R | 58 | MPSTFE RJ | 69 | 250 K SLIM | 80 |
| XT4 433RC-BE | 47 | D23 | 59 | | | 250-BUG 2 | 80 |
| | | DIGITAL 21 | 59 | PROEM® | | 250-BUG 4 | 80 |
| | | DIGITAL 30 868 | 59 | ERC/ACD | 70 | | |
| FADINI® | | | | PUJOL® | | TEDSEN® | |
| ASTRO 433 | 47 | MEDVA® | | NEO | 70 | SKJ | 81 |
| ASTRO 433M | 47 | UNITECH-3E | 59 | TWIN | 70 | SKX | 81 |
| JUBI 433 | 48 | | | VARIO 3 BLACK | 71 | SM | 81 |
| JUBI 433/2 TR | 48 | MHOUSE® | | VARIO 3 OCEAN | 71 | | |
| JUBI SMALL | 48 | GTX4 | 60 | VARIO MARS | 71 | TELCOMA® | |
| | | TX-3-4 | 60 | | | EDGE | 82 |
| FORSA® | | TX3 | 60 | QUASAR® | | NOIRE E | 82 |
| BUTTERFLY | 48 | | | BETA | 71 | TANGO SLIM | 83 |
| TXE | 49 | MOOVO® | | ETA | 71 | | |
| | | MT4 | 60 | TX S433 2 | 71 | V2® | |
| GENIUS® | | MOTORSTAR® | | RIB® | | HANDY | 83 |
| BRAVO TE4433H | 50 | CLIKSTAR 53 | 61 | LITHIO | 71 | PHOENIX 433 | 83 |
| ECHO | 50 | | | MOON | 72 | PHOX 433 | 83 |
| JA40 | 50 | NICE® | | SUN | 72 | TPR-43KF | 84 |
| | | ERA-FLO1R | 62 | | | TRC | 84 |
| GIBIDI® | | ERA-FLO2R | 62 | ROGER® | | TSC | 84 |
| AU1600 | 50 | ERA-FLO4R | 63 | TX10 | 72 | TXC2 | 84 |
| AU1600 WOOD | 50 | ERGO | 63 | TX22 | 72 | TXC4 | 84 |
| AU1680 | 50 | FLO1 | 63 | | | | |
| AU1680 WOOD | 50 | FLO1R-S | 63 | ROLLTORE® | | VDS® | |
| AU3000 DOMINO | 50 | FLO2 | 63 | MPSTFE | 72 | ECO-R | 84 |
| AU01590 | 51 | FLO2R-S | 63 | | | TRQ 2P/4P | 84 |
| | | FL04 | 63 | ROPER® | | | |
| GIBIDI/OPEN OUT® | | FL04R-S | 63 | NEO | 73 | | |
| TMB | 51 | SMILO SM2 | 64 | NER1 DCS | 73 | | |
| GOBBATO® | | SMILO SM4 | 64 | | | | |
| RAD/B2S | 51 | VERY VR | 64 | SABUTOM® | | | |
| | | NOLOGO® | | BROOVER 3P | 73 | | |
| GR® | | SMILE-R | 64 | BROSTAR | 73 | | |
| GR 433 | 52 | | | SEA® | | | |
| GULLIVER® | | NORTON® | | EC 433 | 74 | | |
| MDW/2 | 52 | NEO40-NTN | 65 | SMART DUAL | 75 | | |
| | | TXCD | 65 | SMART DUAL 433 | 75 | | |
| JCM® | | TXE | 65 | SEAV® | | | |
| NEO DMIL | 54 | | | BE HAPPY RS1 NEW | 75 | | |
| NEO EMFA | 55 | NOVOFERM® | | BE HAPPY RS2 NEW | 75 | | |
| NEO PUYOL | 55 | HS 43-1E | 65 | BE HAPPY RS3 NEW | 75 | | |
| NEO SERVIPARKING | 55 | M512 | 65 | BE HAPPY S1 | 75 | | |
| NEO20 SEC | 55 | MCHS | 65 | BE HAPPY S2 | 75 | | |
| TWIN | 56 | MICRO-NOVOTRON 312 | 65 | BE HAPPY S3 | 75 | | |
| KEY® | | MICRO-NOVOTRON 512 | 65 | SIMBA® | | | |
| 900SUB 44WR | 56 | MINI-NOVOTRON 302 | 65 | RC | 76 | | |
| 900TXB-42R | 56 | MINI-NOVOTRON 402 | 66 | | | | |
| TXB 44R | 56 | MINI-NOVOTRON 502 | 66 | SIMINOR® | | | |
| TXG 44R | 56 | MINI-NOVOTRON 504 | 66 | CVX | 76 | | |
| | | MNHS | 66 | | | | |
| LABEL® | | NOVOTRON | 66 | SOMFY® | | | |
| SPYCO-1 | 56 | NOVOTRON 202 MB | 66 | CVX | 77 | | |
| SPYCO-3 | 57 | NOVOTRON 502 MAX 43-2 | 66 | TS 433 | 78 | | |
| | | NOVOTRON 504 MAX 43-4 | 66 | STAGNOLI® | | | |
| LEB® | | PORTAMATIC® | | | | | |
| TCP 2 | 57 | MPH | 67 | | | | |
| TCP 3 | 57 | | | | | | |
| TMW | 57 | | | | | | |

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.

Air4 L2

| | | | | | | | |
|---------------------|----|----------------------------|----|-------------------------------------|----|-----------------|----|
| ADYX® | | IO.2WV ORANGE | 14 | X-2 | 26 | TSAWN | 38 |
| 433-HG BRAVO | 1 | LOT W | 15 | | | | |
| TE4433H BLUE | 1 | LOT WMS | 15 | | | | |
| TM-433 | 1 | LOT XW | 15 | CHAMBERLAIN/LIFT MASTER/M... | | | |
| | | LOT2WCV | 15 | 4335EML | 27 | E-KING® | |
| | | ROLLKEY | 15 | 433EML | 27 | 433 | 38 |
| | | T4 WV | 15 | G4330E | 28 | 433 II | 38 |
| | | TO.G02 WV | 15 | | | 433-M | 38 |
| | | TO.G04 WV | 15 | CLEMSA® | | | |
| | | TO.G0WP | 16 | DIGICODE MH | 28 | ECE® | |
| | | TW4 K | 16 | MH | 30 | 433 TX4 | 38 |
| | | | | MH-E | 30 | ECE 433 | 39 |
| ALFA TORRES® | | | | | | | |
| RT1 - RT2 ALFA | 3 | | | ECOSTAR® | | | |
| | | | | 40 | 39 | | |
| ALLMATIC® | | | | BERNAL® | | EINHELL® | |
| B.RO 2WN | 4 | SKJ | 17 | NEO | 31 | HS433 | 39 |
| B.RO 3WN | 4 | SKX MD | 17 | TWIN | 31 | | |
| B.RO 4WN | 4 | | | DASPI® | | ELBE® | |
| B.RO OVER | 4 | | | ZERO 2 RC | 31 | 50 | 39 |
| B.RO WN RED | 4 | BERNER TORANTRIEBE® | 17 | ZERO 4 RC | 31 | | |
| MINIPASS | 5 | SKX MD | | DEA SYSTEM® | | ELKA® | |
| PASS | 5 | | | GENIE R 273 | 32 | SKX | 40 |
| TECH3 | 5 | BFT® | 17 | GENIE S | 32 | | |
| | | GHIBLI | 17 | GENIE S 263L | 32 | EMFA® | |
| | | KLEIO | 17 | GOLD 238 S1 | 32 | MAP433 | 41 |
| | | MITTO 2 | 17 | GOLD 238 S2 | 32 | NEO | 41 |
| | | MITTO 2/4A | 17 | GOLD 239 S4 | 32 | TWIN | 42 |
| | | MITTO 2/4M | 17 | MIO TD | 32 | | |
| | | MITTO 4 | 18 | PUNTO 268 | 33 | ERONE® | |
| | | MITTO RCB02 | 18 | PUNTO 278 | 33 | OVALI | 42 |
| | | MITTO RCB04 | 18 | TR2/4 | 33 | | |
| ANSONIC® | | RB MURALE | 18 | DELMA® | | ERREKA® | |
| SA434 | 7 | TE01 | 18 | APOLLO-433-4 | 33 | LUNA | 43 |
| | | TE04 | 18 | APOLLO-433-4 NEW | 33 | MC | 44 |
| | | TRC 2/4 | 18 | KING-433 | 33 | RESON 2 | 44 |
| APERTO® | | | | MIZ-433 | 33 | RESON 4 | 44 |
| CPS | 8 | CAME® | 19 | DICKERT® | | SGOX | 45 |
| | | TOP432EV | 19 | IAMS 433 | 34 | SMAT | 45 |
| APRIMATIC® | | TOP432NA | 19 | IS-433 | 35 | | |
| TM4 | 8 | TOP432S | 19 | MAHS433 | 35 | FAAC® | |
| TR2 | 9 | TOP432SA | 19 | S10 -433-AL | 35 | T433 SLH | 46 |
| TR4 | 9 | TOP434A | 20 | S10 AL | 35 | TE433 HG | 46 |
| TXM | 9 | TOP434M | 20 | S20-433-AL | 35 | TML 433 SLH | 47 |
| | | TWIN | 20 | S5-433-AL | 36 | TML2 433 SLR | 47 |
| ATODOR® | | | | | | TML4 433 SLR | 47 |
| G4330 E | 9 | CARDALE DOORS® | 20 | | | XT4 433 SLH | 47 |
| G4332 E | 9 | 433 | 20 | | | XT4 433RC-BE | 47 |
| G4333 E | 9 | 433 II | 20 | DITEC® | | | |
| G4335 E | 9 | 433-M | 20 | BIX LS2 | 36 | FADINI® | |
| | | | | GOL4C | 36 | ASTRO 433 | 47 |
| B&B® | | CARDIN® | 20 | | | ASTRO 433M | 47 |
| EMY N | 11 | S438 TX | 20 | DMIL® | | JUBI 433 | 48 |
| | | | | NEO10 DMIL | 36 | JUBI 433/2 TR | 48 |
| B&D® | | CASIT® | 22 | TWIN | 37 | JUBI SMALL | 48 |
| 62170 | 11 | BE HAPPY S 1P | 22 | | | | |
| PTX4 | 11 | BE HAPPY S 2P | 23 | DOORMATIC® | | FORSA® | |
| | | BE HAPPY S 3P | 23 | AZ-433 | 37 | BUTTERFLY | 48 |
| BECKER® | | BE HAPPY S AZUL 1P | 23 | EURO | 37 | RT1 | 48 |
| MICRO | 12 | BE HAPPY S AZUL 2P | 23 | | | RT4 | 49 |
| | | BE HAPPY S AZUL 3P | 23 | DUCATI® | | TWIN | 49 |
| BELFOX® | | ERTS4C | 23 | TE2 | 37 | TXE | 49 |
| 773 | 13 | | | TPR | 38 | | |
| DHS 7 | 14 | | | TSAW | 38 | GENIUS® | |
| | | CELINSA® | 25 | | | BRAVO TE4433H | 50 |
| BENINCA® | | DW-2 | 25 | | | | |
| APPLE | 14 | MOVICODE | 25 | | | | |
| CUPIDO 2/4 | 14 | RW-2 | 25 | | | | |
| IO.2WV BLUE | 14 | SAW | 26 | | | | |

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.



Air4 Residential Remotes

Air4 L2

| | | MOTORSTAR® | | RIB® | | TRQ 2P/4P | 84 |
|-------------------------|----|-----------------------|----|------------------|----|-----------|----|
| ECHO | 50 | CLIKSTAR 53 | 61 | LITHIO | 71 | | |
| JA40 | 50 | | | MOON | 72 | | |
| GIBIDI® | | NICE® | | SUN | 72 | | |
| AU1600 | 50 | FL01 | 63 | ROGER® | | | |
| AU1600 WOOD | 50 | FL02 | 63 | TX10 | 72 | | |
| AU1680 | 50 | FL04 | 63 | TX22 | 72 | | |
| AU1680 WOOD | 50 | SMILO SM2 | 64 | ROLLTORE® | | | |
| AU3000 DOMINO | 50 | SMILO SM4 | 64 | MPSTFE | 72 | | |
| AU01590 | 51 | VERY VR | 64 | SABUTOM® | | | |
| GIBIDI/OPEN OUT® | | NOLOGO® | | BROOVER 3P | 73 | | |
| TMB | 51 | SMILE-R | 64 | BROSTAR | 73 | | |
| GOBBATO® | | NORTON® | | SEA® | | | |
| RAD/B2S | 51 | NEO40-NTN | 65 | EC 433 | 74 | | |
| | | TXCD | 65 | SMART DUAL | 75 | | |
| GR® | | TXE | 65 | SMART DUAL 433 | 75 | | |
| GR 433 | 52 | NOVOFERM® | | SEAV® | | | |
| GULLIVER® | | HS 43-1E | 65 | BE HAPPY RS1 NEW | 75 | | |
| MDW/2 | 52 | M512 | 65 | BE HAPPY RS2 NEW | 75 | | |
| JCM® | | MCHS | 65 | BE HAPPY RS3 NEW | 75 | | |
| NEO DMIL | 54 | MICRO-NOVOTRON 312 | 65 | BE HAPPY S1 | 75 | | |
| NEO EMFA | 55 | MICRO-NOVOTRON 512 | 65 | BE HAPPY S2 | 75 | | |
| NEO FORSA | 55 | MINI-NOVOTRON 302 | 65 | BE HAPPY S3 | 75 | | |
| NEO PUYOL | 55 | MINI-NOVOTRON 402 | 66 | SIMBA® | | | |
| NEO SERVIPARKING | 55 | MINI-NOVOTRON 502 | 66 | RC | 76 | | |
| NEO20 SEC | 55 | MINI-NOVOTRON 504 | 66 | SIMINOR® | | | |
| TWIN | 56 | MNHS | 66 | CVX | 76 | | |
| KEY® | | NOVOTRON | 66 | SOMFY® | | | |
| 900SUB 44WR | 56 | NOVOTRON 202 MB | 66 | CVX | 77 | | |
| 900TXB-42R | 56 | NOVOTRON 502 MAX 43-2 | 66 | TS 433 | 78 | | |
| TXB 44R | 56 | NOVOTRON 504 MAX 43-4 | 66 | STAGNOLI® | | | |
| TXG 44R | 56 | O&O® | | KALLISTO | 80 | | |
| LABEL® | | ELIOT | 67 | VENUS AV223 | 80 | | |
| SPYCO-1 | 56 | RAY | 67 | ZEUS AZ442 | 80 | | |
| SPYCO-3 | 57 | T.COM R4-2 | 67 | TAU® | | | |
| LEB® | | TX | 67 | 250 K SLIM | 80 | | |
| TCP 2 | 57 | PORTAMATIC® | | 250-BUG 2 | 80 | | |
| TCP 3 | 57 | MPH | 67 | 250-BUG 4 | 80 | | |
| TMW | 57 | PRASTEL® | | TEDSEN® | | | |
| TMW | 57 | MPSTFE | 68 | SKJ | 81 | | |
| | | MPSTFE 2RE | 69 | SKX | 81 | | |
| | | MPSTFE RJ | 69 | SM | 81 | | |
| LUTEC® | | PROEM® | | TELCOMA® | | | |
| TRC4 | 58 | ERC/ACD | 70 | EDGE | 82 | | |
| MARANTEC® | | PUJOL® | | NOIRE E | 82 | | |
| 21R | 58 | NEO | 70 | TANGO SLIM | 83 | | |
| D23 | 59 | TWIN | 70 | V2® | | | |
| DIGITAL 21 | 59 | VARIO 3 BLACK | 71 | TPR-43KF | 84 | | |
| DIGITAL 30 868 | 59 | VARIO 3 OCEAN | 71 | VDS® | | | |
| MHOUSE® | | VARIO MARS | 71 | ECO-R | 84 | | |
| GTX4 | 60 | QUASAR® | | | | | |
| TX-3-4 | 60 | BETA | 71 | | | | |
| TX3 | 60 | ETA | 71 | | | | |
| MOOVO® | | TX S433 2 | 71 | | | | |
| MT4 | 60 | | | | | | |

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.

Air4 F

| | | | | | | | |
|---------------------|----|----------------------------|----|-------------------------------------|----|--------------------|----|
| ADYX® | | 104250 OLD2 | 10 | TOP434M | 20 | ZERO 4 RC | 31 |
| 433-HG BRAVO | 1 | 104250 RED | 10 | TWIN | 20 | | |
| TE4433H BLUE | 1 | 104251 | 10 | | | | |
| TM-433 | 1 | 104257 | 10 | | | | |
| AERF® | | 104350 | 11 | CARDALE DOORS® | | DEA SYSTEM® | |
| BT | 1 | 654250 | 11 | 433 | 20 | GENIE R 273 | 32 |
| COMPACT | 1 | | | 433 II | 20 | GENIE S | 32 |
| HY-DOM | 1 | EMY N | 11 | 433-M | 20 | GENIE S 263L | 32 |
| MARS | 1 | | | | | GOLD 238 S1 | 32 |
| MERCURY B | 2 | | | | | GOLD 238 S2 | 32 |
| MERCURY C | 2 | 62170 | 11 | CARDIN® | | GOLD 239 S4 | 32 |
| SABUTON | 2 | PTX4 | 11 | S438 TX | 20 | GOLD R | 32 |
| SATURN | 2 | | | | | MIO TD | 32 |
| ST3/N | 2 | | | CASALI® | | PUNTO 268 | 33 |
| TERRA | 2 | BECKER® | | 433RC A252 | 22 | PUNTO 278 | 33 |
| TMP-1 | 2 | MICRO | 12 | | | TR2/4 | 33 |
| TMP-2 | 2 | | | CASIT® | | | |
| TTS | 3 | B&B® | | BE HAPPY S 1P | 22 | DELMA® | |
| UNITECH | 3 | 773 | 13 | BE HAPPY S 2P | 23 | APOLLO-433-4 | 33 |
| | | DHS 7 | 14 | BE HAPPY S 3P | 23 | APOLLO-433-4 NEW | 33 |
| | | | | BE HAPPY S AZUL 1P | 23 | KING-433 | 33 |
| | | | | BE HAPPY S AZUL 2P | 23 | MIZ-433 | 33 |
| | | | | BE HAPPY S AZUL 3P | 23 | | |
| ALFA TORRES® | | BELFOX® | | ERTS4C | 23 | DETUMANDO® | |
| RT1 - RT2 ALFA | 3 | APPLE | 14 | MPSTFRC | 23 | DTM ROLL | 34 |
| ALLMATIC® | | CUPIDO 2/4 | 14 | MTE | 23 | | |
| B.RO 2WN | 4 | IO.2WV BLUE | 14 | VTM | 23 | DICKERT® | |
| B.RO 3WN | 4 | IO.2WV ORANGE | 14 | | | IAMS 433 | 34 |
| B.RO 4WN | 4 | LOT W | 15 | CELINSA® | | IS-433 | 35 |
| B.RO OVER | 4 | LOT WMS | 15 | DW-2 | 25 | MAHS433 | 35 |
| B.RO WN RED | 4 | LOT XW | 15 | MOVICODE | 25 | S10-433-AL | 35 |
| MINIPASS | 5 | LOT2WCV | 15 | RW-2 | 25 | S10 AL | 35 |
| PASS | 5 | ROLLKEY | 15 | SAW | 26 | S20-433-AL | 35 |
| TECH3 | 5 | T4 WV | 15 | X-2 | 26 | S5-433-AL | 36 |
| | | TO.G02 WV | 15 | | | | |
| | | TO.G04 WV | 15 | CHAMBERLAIN/LIFT MASTER/M... | | DITEC® | |
| | | TO.GOWP | 16 | 132B2372 | 26 | BIX LG4 | 36 |
| ALLTRONIK® | | TW4 K | 16 | 1A5477 | 26 | BIX LP2 | 36 |
| S425 | 6 | | | 1A5639-7 | 26 | BIX LS2 | 36 |
| ALULUX® | | BERNAL® | | 1A6487 | 27 | GOL4 | 36 |
| DIGITAL 302 | 6 | SKJ | 17 | 433EML | 27 | GOL4C | 36 |
| | | SKX MD | 17 | 433EML | 27 | | |
| ANSONIC® | | BERNER TORANTRIEBE® | | 84330E | 27 | DMIL® | |
| SA434 | 7 | SKX MD | 17 | 84330EML/84333EML/84335EML | 27 | NEO10 DMIL | 36 |
| APERTO® | | BFT® | | 8747EML | 27 | TWIN | 37 |
| CPS | 8 | GHIBLI | 17 | 94330EML/94333EML/94335EML | 27 | | |
| APRIMATIC® | | KLEIO | 17 | 94334CE | 27 | DOORHAN® | |
| TM4 | 8 | MITTO 2 | 17 | 94334E | 27 | TRANSMITTER 2 | 37 |
| TR2 | 9 | MITTO 2/4A | 17 | 94335E | 28 | TRANSMITTER 4 | 37 |
| TR4 | 9 | MITTO 2/4M | 17 | 9747E | 28 | | |
| TXM | 9 | MITTO 4 | 18 | G4330E | 28 | DOORMATIC® | |
| ATA® | | MITTO RCB02 | 18 | DIGICODE MH | 28 | AZ-433 | 37 |
| PTX4 BLU | 9 | MITTO RCB04 | 18 | MASTERCODE | 29 | EURO | 37 |
| PTX4 PINK | 9 | RB MURALE | 18 | MH | 30 | | |
| | | TE01 | 18 | MH-E | 30 | DUCATI® | |
| | | TE04 | 18 | MUTANCODE T2 | 30 | TE2 | 37 |
| ATODOR® | | TRC 2/4 | 18 | T | 30 | TPR | 38 |
| G4330 E | 9 | | | | | TSAW | 38 |
| G4332 E | 9 | CAME® | | CYACSA® | | TSAWN | 38 |
| G4333 E | 9 | TOP432EV | 19 | NEO | 31 | E-KING® | |
| G4335 E | 9 | TOP432NA | 19 | TWIN | 31 | 433 | 38 |
| | | TOP432S | 19 | | | 433 II | 38 |
| AVIDSEN® | | TOP432SA | 19 | DASPI® | | 433-M | 38 |
| 104250 | 10 | TOP434A | 20 | ZERO 2 RC | 31 | ECE® | |

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.



Air4 Residential Remotes

Air4 F

| | | | | | | | |
|-----------------|----|-------------------------|----|--------------------|----|-----------------------|----|
| 433 TX4 | 38 | BRAVO TE4433H | 50 | LUTEC® | | MNHS | 66 |
| ECE 433 | 39 | ECHO | 50 | TRC4 | 58 | NOVOTRON | 66 |
| | | JA40 | 50 | | | NOVOTRON 202 MB | 66 |
| ECOSTAR® | | | | MARANTEC® | | NOVOTRON 502 MAX 43-2 | 66 |
| 40 | 39 | GIBIDI® | | 21R | 58 | NOVOTRON 504 MAX 43-4 | 66 |
| | | AU1600 | 50 | D23 | 59 | | |
| EINHELL® | | AU1600 WOOD | 50 | DIGITAL 21 | 59 | O&O® | |
| HS433 | 39 | AU1680 | 50 | DIGITAL 30 868 | 59 | ELIOT | 67 |
| | | AU1680 WOOD | 50 | | | RAY | 67 |
| ELBE® | | AU3000 DOMINO | 50 | MEDVA® | | T.COM R4-2 | 67 |
| 50 | 39 | AU01590 | 51 | UNITECH-3E | 59 | TX | 67 |
| ELEMAT® | | GIBIDI/OPEN OUT® | | MHOUSE® | | PECCININ® | |
| EL2 PLUS | 39 | TMB | 51 | GTX4 | 60 | TX 3C | 67 |
| ELKA® | | GOBBATO® | | TX-3-4 | 60 | PORTAMATIC® | |
| SKX | 40 | RAD/B2S | 51 | TX3 | 60 | MPH | 67 |
| EMFA® | | GR® | | MOOVO® | | PRASTEL® | |
| MAP433 | 41 | GR 433 | 52 | MT4 | 60 | BFOR | 68 |
| NEO | 41 | | | MOTORSTAR® | | MPSTFE | 68 |
| TWIN | 42 | GULLIVER® | | CLIKSTAR 53 | 61 | MPSTFE 2RE | 69 |
| | | MDW/2 | 52 | | | MPSTFE RJ | 69 |
| ERONE® | | JCM® | | NEW GATE® | | MPSTL E | 69 |
| OVALI | 42 | NEO DMIL | 54 | NOVO3 | 61 | MPSTP2E | 69 |
| ERREKA® | | NEO EMFA | 55 | | | MTE | 69 |
| IRIS 2/4 433 | 43 | NEO FORSA | 55 | NICE® | | SLIM 4E | 69 |
| LIRA 433 | 43 | NEO PUYOL | 55 | ERA ON1E | 62 | TC4E | 69 |
| LUNA | 43 | NEO SERVIPARKING | 55 | ERA ON2E | 62 | TRQ4P | 69 |
| MC | 44 | NEO20 SEC | 55 | ERA ON4E | 62 | PROEM® | |
| RESON 2 | 44 | TWIN | 56 | ERA-FLO1R | 62 | ER4C4ACS | 70 |
| RESON 4 | 44 | | | ERA-FLO2R | 62 | ERC/ACD | 70 |
| ROLLER 2 433 | 44 | KEY® | | ERA-FLO4R | 63 | | |
| SGOX | 45 | 900SUB 44WR | 56 | ERGO | 63 | PUJOL® | |
| SMAT | 45 | 900TXB-42R | 56 | FL01 | 63 | NEO | 70 |
| SOL 2R/4R 433 | 45 | TXB 44R | 56 | FL01R-S | 63 | TWIN | 70 |
| VEGA 2/4 433 | 45 | TXG 44R | 56 | FL02 | 63 | VARIO 3 BLACK | 71 |
| | | | | FL02R-S | 63 | VARIO 3 OCEAN | 71 |
| | | | | FL04 | 63 | VARIO MARS | 71 |
| | | KING GATES® | | FL04R-S | 63 | | |
| FAAC® | | CLIPPER | 56 | INTI | 63 | QUASAR® | |
| T433 SLH | 46 | STYLO 4 | 56 | ON4 | 63 | BETA | 71 |
| TE433 HG | 46 | | | SMILO SM2 | 64 | ETA | 71 |
| TML 433 SLH | 47 | KLING® | | SMILO SM4 | 64 | TX S433 2 | 71 |
| TML2 433 SLR | 47 | KUA2 | 56 | VERY VR | 64 | | |
| TML4 433 SLR | 47 | | | NOLOGO® | | RIB® | |
| XT4 433 SLH | 47 | LABEL® | | SMILE-R | 64 | LITHIO | 71 |
| XT4 433RC-BE | 47 | SPYCO-1 | 56 | | | MOON | 72 |
| | | SPYCO-3 | 57 | NORTON® | | SUN | 72 |
| FADINI® | | | | NEO40-NTN | 65 | ROGER® | |
| ASTRO 433 | 47 | LEB® | | TXCD | 65 | TX10 | 72 |
| ASTRO 433M | 47 | TCP 2 | 57 | TXE | 65 | TX22 | 72 |
| JUBI 433 | 48 | TCP 3 | 57 | NOVOFERM® | | ROLLTORE® | |
| JUBI 433/2 TR | 48 | TMW | 57 | HS 43-1E | 65 | MPSTFE | 72 |
| JUBI SMALL | 48 | TMW | 57 | M512 | 65 | | |
| | | | | MCHS | 65 | ROPER® | |
| FORSÀ® | | LIFE® | | MICRO-NOVOTRON 312 | 65 | NEO | 73 |
| BUTTERFLY | 48 | FID02 | 57 | MICRO-NOVOTRON 512 | 65 | NER1 DCS | 73 |
| RT1 | 48 | FID04 | 57 | MINI-NOVOTRON 302 | 65 | SABUTOM® | |
| RT4 | 49 | VIP2 | 57 | MINI-NOVOTRON 402 | 66 | BROOVER 3P | 73 |
| TWIN | 49 | VIP2R | 57 | MINI-NOVOTRON 502 | 66 | | |
| TXE | 49 | VIP4 | 58 | MINI-NOVOTRON 504 | 66 | | |
| | | VIP4R | 58 | | | | |
| GENIUS® | | | | | | | |
| A252 | 49 | | | | | | |

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.

Air4 F

| | | | |
|--------------------------------|----|-------------|----|
| BROSTAR | 73 | PHOENIX 433 | 83 |
| NOVO | 73 | PHOX 433 | 83 |
| SEA® | | TPR-43KF | 84 |
| COCCINELLA ROLL CARBON | 74 | TRC | 84 |
| COCCINELLA ROLL GREY | 74 | TSC | 84 |
| COCCINELLA ROLL RED | 74 | TXC2 | 84 |
| EC 433 | 74 | TXC4 | 84 |
| HEAD 2 433 | 74 | VDS® | |
| HEAD 4 433 | 74 | ECO-R | 84 |
| SMART DUAL | 75 | TRQ 2P/4P | 84 |
| SMART DUAL 433 | 75 | | |
| SEAV® | | | |
| BE HAPPY RS1 NEW | 75 | | |
| BE HAPPY RS2 NEW | 75 | | |
| BE HAPPY RS3 NEW | 75 | | |
| BE HAPPY S1 | 75 | | |
| BE HAPPY S2 | 75 | | |
| BE HAPPY S3 | 75 | | |
| SILVELOX® | | | |
| 3107467 VITE BIANCA | 75 | | |
| TSM | 76 | | |
| SIMBA® | | | |
| RC | 76 | | |
| SIMINOR® | | | |
| CVX | 76 | | |
| CVXNL | 76 | | |
| ERXC4ACS / ER2C4ACS / ER4C4ACS | 76 | | |
| MITTO | 76 | | |
| SIM433 | 77 | | |
| SIM433 | 77 | | |
| SOMFY® | | | |
| CVX | 77 | | |
| TS 433 | 78 | | |
| STAGNOLI® | | | |
| KALLISTO | 80 | | |
| VENUS AV223 | 80 | | |
| ZEUS AZ442 | 80 | | |
| TAU® | | | |
| 250 K SLIM | 80 | | |
| 250 SLIM RP | 80 | | |
| 250 T4 RC | 80 | | |
| 250-BUG 2 | 80 | | |
| 250-BUG 4 | 80 | | |
| TEDSEN® | | | |
| SKJ | 81 | | |
| SKX | 81 | | |
| SM | 81 | | |
| TELCOMA® | | | |
| EDGE | 82 | | |
| NOIRE E | 82 | | |
| TANGO SLIM | 83 | | |
| V2® | | | |
| HANDY | 83 | | |

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.



Air4 Residential Remotes

Air4 V

| | | | | | | | |
|-------------------------|---|-----------------|----|----------------|----|-------------------------------------|----|
| ACM® | | 4020-TX03-434 | 8 | LOT WMS | 15 | S486 QZ3 OLD | 22 |
| TX2 | 1 | TX02-434-2 | 8 | LOT X | 15 | S486 QZ4 | 22 |
| TX4 | 1 | TX02-434-2 | 8 | LOT XPS | 15 | TXQ 486 | 22 |
| | | | | LOT XW | 15 | TXQ 486 NEW | 22 |
| | | | | LOT2WCV | 15 | TXQ S449 GREEN | 22 |
| ADYX® | | | | | | | |
| 433-HG BRAVO | 1 | TM4 | 8 | ROLLKEY | 15 | | |
| TE443H BLUE | 1 | TR2 | 9 | T4 WV | 15 | | |
| TM-433 | 1 | TR4 | 9 | TO.G02 WV | 15 | | |
| | | TXM | 9 | TO.G04 WV | 15 | | |
| | | | | TO.G0QV | 16 | | |
| AERF® | | | | | | | |
| BT | 1 | | | TO.GOWP | 16 | | |
| COMPACT | 1 | PTX4 BLU | 9 | TW4 K | 16 | | |
| HY-DOM | 1 | PTX4 PINK | 9 | | | | |
| MARS | 1 | | | | | | |
| MARS | 1 | | | | | | |
| MERCURY B | 2 | G4330 E | 9 | BERNAL® | | | |
| MERCURY B | 2 | G4332 E | 9 | RCBE | 16 | BE HAPPY S AZUL 1P | 23 |
| MERCURY C | 2 | G4333 E | 9 | SKJ | 17 | BE HAPPY S AZUL 2P | 23 |
| MERCURY C | 2 | G4335 E | 9 | SKX MD | 17 | BE HAPPY S AZUL 3P | 23 |
| SABUTON | 2 | | | | | ERTS4C | 23 |
| SATURN | 2 | | | | | MPSTFR | 23 |
| ST3/N | 2 | EMB | 10 | | | MTE | 23 |
| TERRA | 2 | TX300 | 10 | | | VTM | 23 |
| TMP-1 | 2 | TX300T | 10 | BFT® | | | |
| TMP-2 | 2 | | | GHIBLI | 17 | CELINSA® | |
| TTS | 3 | | | KLEIO | 17 | C-2 | 24 |
| UNITECH | 3 | 104250 | 10 | MITTO 2 | 17 | DR-2 | 24 |
| | | 104250 OLD2 | 10 | MITTO 2/4A | 17 | DW-2 | 25 |
| ALFA TORRES® | | 104250 RED | 10 | MITTO 2/4M | 17 | ME | 25 |
| RT1 - RT2 ALFA | 3 | 104251 | 10 | MITTO RCB02 | 18 | ME-B | 25 |
| TP2 MINI | 3 | 104257 | 10 | MITTO RCB04 | 18 | MOVICODE | 25 |
| | | 104350 | 11 | RB MURALE | 18 | RW-2 | 25 |
| ALLMATIC® | | 654250 | 11 | TE01 | 18 | SAW | 26 |
| ASMX2 | 4 | | | TE02 | 18 | SE | 26 |
| ASMY | 4 | | | TE04 | 18 | SE-1 | 26 |
| B.RO 2WN | 4 | B&B® | | TFQ | 18 | SE-1B | 26 |
| B.RO 3WN | 4 | EMY N | 11 | TRC 2/4 | 18 | SE-B | 26 |
| B.RO 4WN | 4 | | | TX2 306 | 19 | X-2 | 26 |
| B.RO OVER | 4 | | | VTM | 19 | Z-2 | 26 |
| B.RO WN RED | 4 | | | | | CHAMBERLAIN/LIFT MASTER/M... | |
| MINIPASS | 5 | BALLAN® | | TOP432EV | 19 | 132B2372 | 26 |
| PASS | 5 | FM402 | 11 | TOP432NA | 19 | 1A5477 | 26 |
| TECH3 | 5 | FM402E | 11 | TOP432S | 19 | 1A5639-7 | 26 |
| | | FM404 (FM) | 11 | TOP432SA | 19 | 1A6487 | 27 |
| ALLTRONIK® | | FM404B | 11 | TOP434A | 20 | 371 LM | 27 |
| S425 | 6 | FM404E | 12 | TOP434M | 20 | 4335EML | 27 |
| | | | | TOP862NA | 20 | 433EML | 27 |
| ALUKON® | | | | TWIN | 20 | 84330E | 27 |
| COMFORT 220 | 6 | BECKER® | | | | 84330EML/84333EML/84335EML | 27 |
| MT87A1 | 6 | MICRO | 12 | | | 8747EML | 27 |
| | | | | | | 94330EML/94333EML/94335EML | 27 |
| ALULUX® | | | | | | 94334CE | 27 |
| DIGITAL 302 | 6 | BELFOX® | | | | 94334E | 27 |
| DIGITAL 302 | 6 | 773 | 13 | 433 II | 20 | 94335E | 28 |
| MT87A1 | 7 | 783 | 13 | 433-M | 20 | 953ESTD | 28 |
| | | 7834-MINI | 13 | 868-4C | 20 | 953ESTD | 28 |
| ANSONIC® | | DHS 7 | 14 | | | 953ESTD | 28 |
| SA434 | 7 | BENINCA® | | | | 953ESTD | 28 |
| SF433 | 8 | APPLE | 14 | S437 TX | 20 | 971 LM | 28 |
| | | CUPIDO 2/4 | 14 | S438 TX | 20 | 9747E | 28 |
| APERTO® | | IO.2WV BLUE | 14 | S449 QZ1 | 21 | G4330E | 28 |
| CPS | 8 | IO.2WV ORANGE | 14 | S449 QZ2 | 21 | | |
| | | LOT A | 14 | S449 QZ3 | 21 | CIMESA® | |
| APERTO (SOMMER)® | | LOT W | 15 | S449 QZ4 | 21 | EM | 28 |
| | | | | S486 QZ1 OLD | 21 | | |
| | | | | S486 QZ2 OLD | 21 | CLEMESA® | |

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.

Air4 V

| | | | | | | | |
|--------------------|----|-------------------|----|----------------|----|-------------------------|----|
| D | 28 | S10 AL | 35 | ELKA® | | TM1 868 DS | 46 |
| DIGICODE MH | 28 | S10 AL | 35 | SK | 40 | TM2 300 | 46 |
| E | 29 | S20-433-AL | 35 | SKX | 40 | TM2 300S | 46 |
| E-300 | 29 | S20-868-AL | 36 | SKX1LC | 40 | TML 433 SLH | 47 |
| E-600 | 29 | S5-433-AL | 36 | SKX2LC | 40 | TML2 433 SLR | 47 |
| E-CODE N | 29 | S5-868-AL | 36 | SKX3LC | 41 | TML4 433 SLR | 47 |
| E20 | 29 | | | SKX4LC | 41 | XT4 433 SLH | 47 |
| EM | 29 | | | | | XT4 433RC-BE | 47 |
| FA | 29 | BIX LG4 | 36 | EMFA® | | XT4 868 SLH | 47 |
| M-60 | 29 | BIX LP2 | 36 | BINARY | 41 | | |
| MASTERCODE | 29 | BIX LS2 | 36 | MA0868 | 41 | FADINI® | |
| MH | 30 | GOL4 | 36 | MAP433 | 41 | ASTRO 433 | 47 |
| MH-E | 30 | GOL4C | 36 | NEO | 41 | ASTRO 433M | 47 |
| MT | 30 | | | TE3 | 41 | JUBI 433 | 48 |
| MT-X | 30 | DMIL® | | TRINARY | 42 | JUBI 433/2 TR | 48 |
| MT-Y | 30 | GO | 36 | TWIN | 42 | JUBI SMALL | 48 |
| MT-Z | 30 | NEO10 DMIL | 36 | | | | |
| MUTANCODE T2 | 30 | TWIN | 37 | ERONE® | | FREPORT® | |
| T | 30 | | | OVALI | 42 | TAC 80 | 48 |
| T-8 | 30 | | | | | | |
| CYACSA® | | | | | | FORSA® | |
| MINI GO | 31 | TRANSMITTER 2 | 37 | ERREKA® | | BUTTERFLY | 48 |
| NEO | 31 | TRANSMITTER 4 | 37 | BARR | 42 | MINI GO | 48 |
| TWIN | 31 | | | BM | 42 | RT1 | 48 |
| DASPI® | | | | CEME | 42 | RT2 | 49 |
| ZERO 2 RC | 31 | DOORMATIC® | | CLEM | 42 | RT4 | 49 |
| ZERO 4 RC | 31 | AM-300 | 37 | CLMX | 42 | TRIEME | 49 |
| DEA SYSTEM® | | AZ-433 | 37 | CLMY | 43 | TWIN | 49 |
| 306 | 31 | EURO | 37 | CYJC | 43 | TX26 | 49 |
| GENIE R 273 | 32 | MILENY | 37 | IRIS 2/4 433 | 43 | TXE | 49 |
| GENIE S | 32 | | | IRIS 2/4 868 | 43 | | |
| GENIE S 263L | 32 | DUCATI® | | JC | 43 | GENIUS® | |
| GOLD 238 S1 | 32 | TE2 | 37 | JJM | 43 | A252 | 49 |
| GOLD 238 S2 | 32 | TPR | 38 | LIRA 433 | 43 | AMIGO 868 | 49 |
| GOLD 239 S4 | 32 | TSAW | 38 | LIRA 868 | 43 | AMIGOLD 2-4 868 | 50 |
| GOLD 306 | 32 | TSAWN | 38 | LUNA | 43 | BRAVO TE4433H | 50 |
| GOLD R | 32 | E-KING® | | MATZ | 44 | ECHO | 50 |
| MIO TD | 32 | 433 | 38 | MATZ AZUL | 44 | JA40 | 50 |
| PUNTO 268 | 33 | 433 II | 38 | MC | 44 | KILO 868 | 50 |
| PUNTO 278 | 33 | 433-M | 38 | MT | 44 | | |
| TR2/4 | 33 | 868-4C | 38 | RESON 2 | 44 | GIBIDI® | |
| DELMA® | | TX433 | 38 | RESON 4 | 44 | AU1600 | 50 |
| APOLLO-300-4 | 33 | TX868 | 38 | RLT | 44 | AU1600 WOOD | 50 |
| APOLLO-433-4 | 33 | ECE® | | ROLLER 2 433 | 44 | AU1680 | 50 |
| APOLLO-433-4 NEW | 33 | 433 TX4 | 38 | ROLLER 2 868 | 44 | AU1680 WOOD | 50 |
| KING-433 | 33 | ECE 433 | 39 | ROLLER 4 868 | 44 | AU3000 DOMINO | 50 |
| MIZ-300 | 33 | | | SGOX | 45 | AU01590 | 51 |
| MIZ-433 | 33 | ECOSTAR® | | SMAT | 45 | | |
| DETUMANDO® | | 40 | 39 | SOL 2/4R 433 | 45 | GIBIDI/OPEN OUT® | |
| DTM ROLL | 34 | RSC | 39 | SOL 2/4R 868 | 45 | L110 | 51 |
| DICKERT® | | RSE | 39 | TEMI | 45 | TMB | 51 |
| HS-868 | 34 | RSZ | 39 | TENZ | 45 | TSM | 51 |
| HS-868 GREY | 34 | EINHELL® | | VEGA 2/4 433 | 45 | | |
| IAMS 433 | 34 | HS433 | 39 | VEGA 2/4 868 | 45 | GOBBATO® | |
| IS-433 | 35 | | | FAAC® | | RAD/B2S | 51 |
| IS-868 | 35 | ELBE® | | 418 SL | 45 | | |
| MAHS433 | 35 | EL2 PLUS | 39 | DL 2/4 868 SLH | 45 | GR® | |
| S10 -433-AL | 35 | MINI TEC 2C | 40 | R40 330 NEW | 46 | GR 433 | 52 |
| | | TRINARY | 40 | R40 330 OLD | 46 | | |
| | | | | T433 SLH | 46 | GULLIVER® | |
| | | | | T868 SLH | 46 | MDRS | 52 |
| | | | | TE433 HG | 46 | MDW/2 | 52 |
| | | | | TM 315 | 46 | | |
| | | | | TM1 300 | 46 | HORMANN® | |

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.



Air4 Residential Remotes

Air4 V

| | | | | | | | |
|--------------------|----|------------------------|----|-----------------------|----|------------------------|----|
| HS4 868 BS | 52 | FID04 | 57 | ERA ON9E FM | 62 | MPSTFE | 68 |
| HS868 | 52 | VP2 | 57 | ERA-FLO1R | 62 | MPSTFE 2RE | 69 |
| HSE 433 | 52 | VP2R | 57 | ERA-FLO2R | 62 | MPSTFE RJ | 69 |
| HSE2 868 BS | 52 | VP4 | 58 | ERA-FLO4R | 63 | MPSTL E | 69 |
| HSM 433 | 52 | VP4R | 58 | ERGO | 63 | MPSTP2E | 69 |
| HSM4 868 | 53 | | | FLO1 | 63 | MTE | 69 |
| HSP4-868 | 53 | LINEAR® | | FLO1R-S | 63 | NCSMT4P-A | 69 |
| JCM® | | LINEAR | 58 | FLO2 | 63 | SLIM 4E | 69 |
| BINARY | 53 | MEGACODE | 58 | FLO2R-S | 63 | TC4E | 69 |
| CYACSA GO | 53 | LINEAR-HCS® | | FLO4 | 63 | TRQ4P | 69 |
| DMIL GO | 53 | TX2T-A | 58 | FLO4R-S | 63 | PROEM® | |
| EB | 53 | TX3T-A | 58 | INTI | 63 | ER4C4ACS | 70 |
| EF | 53 | TX4T-A | 58 | ON4 | 63 | ERC/ACD | 70 |
| EM | 53 | | | SMILO SM2 | 64 | | |
| ET | 53 | LUTEC® | | SMILO SM4 | 64 | PUJOL® | |
| FORSA GO | 53 | TRC4 | 58 | VERY VR | 64 | ET | 70 |
| FORSA GO | 54 | | | NOLOGO® | | MARTE | 70 |
| GO | 54 | MARANTEC® | | SMILE-R | 64 | NEO | 70 |
| GO CUBELLS | 54 | 21R | 58 | NORTON® | | P15 | 70 |
| GO GIBIDI | 54 | D23 | 59 | NEO40-NTN | 65 | TWIN | 70 |
| GO MINI-NTN | 54 | D384-868 | 59 | TXCD | 65 | VARIO 3 BLACK | 71 |
| GO-2 ANTONIO ONECA | 54 | DIGITAL 21 | 59 | TXE | 65 | VARIO 3 OCEAN | 71 |
| GO2 EMFA | 54 | DIGITAL 30 868 | 59 | NOVOFERM® | | VARIO MARS | 71 |
| HYDOM GO | 54 | DIGITAL 313 | 59 | HS 43-1E | 65 | QTRON® | |
| MINI GO2 NTN | 54 | DIGITAL 32 868 | 59 | M512 | 65 | QT1000 TX1 433CH | 71 |
| NEO DIMIL | 54 | | | MCHS | 65 | QT1005 TX3 433CH | 71 |
| NEO EMFA | 55 | MEDVA® | | MICRO-NOVOTRON 312 | 65 | QT1010 TX4 433CH | 71 |
| NEO FORSA | 55 | UNITECH-3E | 59 | MICRO-NOVOTRON 512 | 65 | QUASAR® | |
| NEO PUYOL | 55 | | | MINI-NOVOTRON 302 | 65 | BETA | 71 |
| NEO SERVIPARKING | 55 | MERLIN 2.0® | | MINI-NOVOTRON 402 | 66 | ETA | 71 |
| NEO10+KOM | 55 | E940M | 59 | MINI-NOVOTRON 502 | 66 | TX S433 2 | 71 |
| NEO20 SEC | 55 | E943M | 59 | MINI-NOVOTRON 504 | 66 | RIB® | |
| NORTON GO | 55 | E945M | 60 | MNHS | 66 | LITHIO | 71 |
| TECHG02 | 55 | | | NOVOTRON | 66 | MOON | 72 |
| TECHG04 | 55 | MERLIN/PROLIFT® | | NOVOTRON 202 MB | 66 | SUN | 72 |
| TRIEME | 56 | C940 | 60 | NOVOTRON 502 MAX 43-2 | 66 | ROGER® | |
| TWIN | 56 | C943 | 60 | NOVOTRON 504 MAX 43-4 | 66 | TX10 | 72 |
| | | C945 | 60 | O&O® | | TX22 | 72 |
| KEY® | | M842 (GREEN) | 60 | ELIOT | 67 | ROLLTORE® | |
| 900SUB 44WR | 56 | M844 (GREEN) | 60 | RAY | 67 | MPSTFE | 72 |
| 900TXB-42R | 56 | | | T.COM R4-2 | 67 | R330 | 72 |
| TXB 44R | 56 | MHOUSE® | | T.COM R8-4 | 67 | R40 | 73 |
| TXG 44R | 56 | GTX4 | 60 | TX | 67 | R40-330 NEW | 73 |
| | | TX-3-4 | 60 | PECCININ® | | ROPER® | |
| KING GATES® | | TX3 | 60 | TX 3C | 67 | GO | 73 |
| CLIPPER | 56 | MOOVO® | | PORTAMATIC® | | NEO | 73 |
| STYLO 4 | 56 | MT4 | 60 | MPH | 67 | NER1 DCS | 73 |
| | | | | MPSA | 68 | TRINARY | 73 |
| KLING® | | MOTORSTAR® | | MPSN | 68 | SABUTOM® | |
| KUA2 | 56 | CLIKSTAR 53 | 61 | PORTIS® | | BROOVER 3P | 73 |
| LABEL® | | | | GO PRO MINI | 68 | BROSTAR | 73 |
| SPYCO-1 | 56 | NEW GATE® | | TELTSIS | 68 | NOVO | 73 |
| SPYCO-3 | 57 | NOVO3 | 61 | PRASTEL® | | SEA® | |
| | | | | BFOR | 68 | COCCINELLA ROLL CARBON | 74 |
| LEB® | | NICE® | | KMFT | 68 | COCCINELLA ROLL GREY | 74 |
| TCP 2 | 57 | EASY S | 61 | KMFTP | 68 | | |
| TCP 3 | 57 | ERA ON1E | 62 | | | | |
| TMW | 57 | ERA ON1E FM | 62 | | | | |
| TMW | 57 | ERA ON2E | 62 | | | | |
| | | ERA ON2E FM | 62 | | | | |
| LIFE® | | ERA ON4E | 62 | | | | |
| FID02 | 57 | ERA ON4E FM | 62 | | | | |

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.

Air4 Residential Remotes



Air4 V

| | | | |
|--------------------------------|----|-----------------|----|
| COCCINELLA ROLL RED | 74 | TAU® | |
| EC 433 | 74 | 250 K SLIM | 80 |
| HEAD 2 433 | 74 | 250 SLIM RP | 80 |
| HEAD 4 433 | 74 | 250 T4 RC | 80 |
| HEAD ROLL 868-2 | 74 | 250-BUG 2 | 80 |
| SMART DUAL | 75 | 250-BUG 4 | 80 |
| SMART DUAL 433 | 75 | | |
| SEAV® | | TEDSEN® | |
| BE HAPPY RS1 NEW | 75 | SKJ | 81 |
| BE HAPPY RS2 NEW | 75 | SKX | 81 |
| BE HAPPY RS3 NEW | 75 | SKX DL | 81 |
| BE HAPPY S1 | 75 | SKX HD | 81 |
| BE HAPPY S2 | 75 | SKX HD | 81 |
| BE HAPPY S3 | 75 | SKX LC | 81 |
| | | SKX MD | 81 |
| SERAI® | | SKX SL | 81 |
| SER 310 | 75 | SM | 81 |
| SILVELOX® | | TELCOMA® | |
| 3107467 VITE BIANCA | 75 | EDGE | 82 |
| TSM | 76 | FM 402 | 82 |
| | | FM 402 | 82 |
| | | FM 402 E | 82 |
| SIMBA® | | FM 404 | 82 |
| RC | 76 | FM 404 E | 82 |
| | | NOIRE E | 82 |
| SIMINOR® | | RCS | 83 |
| CVX | 76 | TANGO SLIM | 83 |
| CVXNL | 76 | | |
| ERXC4ACS / ER2C4ACS / ER4C4ACS | 76 | V2® | |
| MITTO | 76 | HANDY | 83 |
| SIM433 | 77 | PHOENIX 433 | 83 |
| SIM433 | 77 | PHOX 433 | 83 |
| | | TPR-43KF | 84 |
| SOMFY® | | TRC | 84 |
| ALARMA | 77 | TSC | 84 |
| CVX | 77 | TXC2 | 84 |
| K-EASY | 77 | TXC4 | 84 |
| K-EASY NEW | 77 | | |
| K-EASY OLD | 77 | VDS® | |
| KEYGO GX523 | 77 | ECO-R | 84 |
| KEYTIS RTS | 77 | TRQ 2P/4P | 84 |
| KEYTIS RTS NS | 78 | | |
| KEYTIS-NS-2-RTS | 78 | | |
| KEYTIS-NS-4-RTS | 78 | | |
| MITTO | 78 | | |
| TELIS 1-4 RTS | 78 | | |
| TS 433 | 78 | | |
| SOMMER® | | | |
| 4010 | 78 | | |
| 4020 TX03-868 | 78 | | |
| 4025 433 | 79 | | |
| 4025 868 | 79 | | |
| 4026 TX03-868 | 79 | | |
| TRX-55-868-4 | 79 | | |
| TX03-434-2-XP | 79 | | |
| TX03-868-2-XP | 80 | | |
| TX03-868-4-XP | 80 | | |
| STAGNOLI® | | | |
| KALLISTO | 80 | | |
| VENUS AV223 | 80 | | |
| ZEUS AZ442 | 80 | | |

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.



Air4 Residential Remotes

Air4 V PLUS (EU)

| | | | | | | | |
|-------------------------|---|-----------------|----|-----------------------|----|-------------------------------------|----|
| ACM® | | TX02-434-2 | 8 | ROLLKEY | 15 | CASALI® | |
| TX2 | 1 | TX02-434-2 | 8 | T4 WV | 15 | 433RC A252 | 22 |
| TX4 | 1 | | | TO.GO2 WV | 15 | JA332 AMIGO 868 | 22 |
| ADYX® | | | | TO.GO4 WV | 15 | | |
| 433-HG BRAVO | 1 | TM4 | 8 | TO.GOQV | 16 | CASIT® | |
| TE443H BLUE | 1 | TR2 | 9 | TO.GOWP | 16 | BE HAPPY S 1P | 22 |
| TM-433 | 1 | TR4 | 9 | TW4 K | 16 | BE HAPPY S 2P | 23 |
| | | TXM | 9 | | | BE HAPPY S 3P | 23 |
| AERF® | | | | | | BE HAPPY S AZUL 1P | 23 |
| BT | 1 | ATODOR® | | | | BE HAPPY S AZUL 2P | 23 |
| COMPACT | 1 | G4330 E | 9 | RCBE | 16 | BE HAPPY S AZUL 3P | 23 |
| HY-DOM | 1 | G4332 E | 9 | SKJ | 17 | ERTS4C | 23 |
| MARS | 1 | G4333 E | 9 | SKX MD | 17 | MPSTFRC | 23 |
| MARS | 1 | G4335 E | 9 | BERNAL® | | MTE | 23 |
| MERCURY B | 2 | AUTELCO® | | SKX MD | 17 | VTM | 23 |
| MERCURY B | 2 | EMB | 10 | BFT® | | | |
| MERCURY C | 2 | TX300 | 10 | GHIBLI | 17 | CELINSA® | |
| MERCURY C | 2 | TX300T | 10 | KLEIO | 17 | C-2 | 24 |
| SABUTON | 2 | | | MITTO 2 | 17 | DR-2 | 24 |
| SATURN | 2 | AVIDSEN® | | MITTO 2/4A | 17 | DW-2 | 25 |
| ST3/N | 2 | 104250 | 10 | MITTO 2/4M | 17 | ME | 25 |
| TERRA | 2 | 104250 OLD2 | 10 | MITTO 4 | 18 | ME-B | 25 |
| TMP-1 | 2 | 104250 RED | 10 | MITTO RCB02 | 18 | RW-2 | 25 |
| TMP-2 | 2 | 104251 | 10 | MITTO RCB04 | 18 | SAW | 26 |
| TTS | 3 | 104257 | 10 | RB MURALE | 18 | SE | 26 |
| UNITECH | 3 | 104350 | 11 | TE01 | 18 | SE-1 | 26 |
| | | 654250 | 11 | TE02 | 18 | SE-1B | 26 |
| | | | | TE04 | 18 | SE-B | 26 |
| ALFA TORRES® | | | | B&B® | | CHAMBERLAIN/LIFT MASTER/M... | |
| RT1 - RT2 ALFA | 3 | | | EMY N | 11 | 433EML | 27 |
| ALLMATIC® | | | | | | 433EML | 27 |
| ASMX2 | 4 | B&D® | | | | G4330E | 28 |
| ASMY | 4 | 62170 | 11 | CAME® | | | |
| B.RO 2WN | 4 | PTX4 | 11 | TOP432EV | 19 | CIMESA® | |
| B.RO 3WN | 4 | | | TOP432NA | 19 | EM | 28 |
| B.RO 4WN | 4 | BALLAN® | | TOP432S | 19 | | |
| B.RO OVER | 4 | FM402 | 11 | TOP432SA | 19 | CLEMISA® | |
| B.RO WN RED | 4 | FM402E | 11 | TOP434A | 20 | D | 28 |
| MINIPASS | 5 | FM404 (FM) | 11 | TOP434M | 20 | DIGICODE MH | 28 |
| PASS | 5 | FM404B | 11 | TOP862NA | 20 | E | 29 |
| TECH3 | 5 | FM404E | 12 | TWIN | 20 | E-300 | 29 |
| | | | | | | E-600 | 29 |
| ALLTRONIK® | | | | BECKER® | | EM | 29 |
| S425 | 6 | MICRO | 12 | CARDALE DOORS® | | FA | 29 |
| ALUKON® | | | | 433 | 20 | M-60 | 29 |
| COMFORT 220 | 6 | BELFOX® | | 433 II | 20 | MH | 30 |
| MT87A1 | 6 | 773 | 13 | 433-M | 20 | MH-E | 30 |
| | | 783 | 13 | 868-4C | 20 | MT | 30 |
| ALULUX® | | 7834-MINI | 13 | | | MT-X | 30 |
| DIGITAL 302 | 6 | DHS 7 | 14 | CARDIN® | | MT-Y | 30 |
| DIGITAL 302 | 6 | | | S437 TX | 20 | MT-Z | 30 |
| MT87A1 | 7 | BENINCA® | | S438 TX | 20 | DASPI® | |
| | | APPLE | 14 | S449 QZ1 | 21 | ZERO 2 RC | 31 |
| ANSONIC® | | CUPIDO 2/4 | 14 | S449 QZ2 | 21 | ZERO 4 RC | 31 |
| SA434 | 7 | IO.2WV BLUE | 14 | S449 QZ3 | 21 | | |
| SF433 | 8 | IO.2WV ORANGE | 14 | S449 QZ4 | 21 | DEA SYSTEM® | |
| APERTO® | | LOT A | 14 | S486 QZ1 OLD | 21 | 306 | 31 |
| CPS | 8 | LOT W | 15 | S486 QZ2 OLD | 21 | GENIE R 273 | 32 |
| | | LOT WMS | 15 | S486 QZ3 OLD | 22 | GENIE S | 32 |
| APERTO (SOMMER)® | | LOT X | 15 | S486 QZ4 | 22 | GENIE S 263L | 32 |
| 4020-TX03-434 | 8 | LOT XPS | 15 | TXQ 486 | 22 | GOLD 238 S1 | 32 |
| | | LOT XW | 15 | TXQ 486 NEW | 22 | GOLD 238 S2 | 32 |
| | | LOT2WCV | 15 | TXQ S449 GREEN | 22 | | |

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.

Air4 V PLUS (EU)

| | | | | | | | |
|-------------------|----|-----------------|----|-------------------------|----|--------------------|----|
| GOLD 239 S4 | 32 | ECOSTAR® | | TM2 300 | 46 | HSE 433 | 52 |
| GOLD 306 | 32 | 40 | 39 | TM2 300S | 46 | HSE2 868 BS | 52 |
| GOLD R | 32 | RSC | 39 | TML 433 SLH | 47 | HSM 433 | 52 |
| MIO TD | 32 | RSE | 39 | TML2 433 SLR | 47 | HSM4 868 | 53 |
| PUNTO 268 | 33 | RSZ | 39 | TML4 433 SLR | 47 | HSP4-868 | 53 |
| PUNTO 278 | 33 | | | XT4 433 SLH | 47 | | |
| TR2/4 | 33 | | | XT4 433RC-BE | 47 | | |
| DELMA® | | | | XT4 868 SLH | 47 | JCM® | |
| APOLLO-300-4 | 33 | ELBE® | | | | BINARY | 53 |
| APOLLO-433-4 | 33 | 50 | 39 | FADINI® | | EB | 53 |
| APOLLO-433-4 NEW | 33 | | | ASTRO 433 | 47 | EF | 53 |
| KING-433 | 33 | ELEMAT® | | ASTRO 433M | 47 | EM | 53 |
| MIZ-300 | 33 | TRINARY | 40 | JUBI 433 | 48 | ET | 53 |
| MIZ-433 | 33 | | | JUBI 433/2 TR | 48 | GO | 54 |
| DICKERT® | | ELKA® | | JUBI SMALL | 48 | GO CUBELLS | 54 |
| HS-868 | 34 | SK | 40 | FERPORT® | | MINI G02 NTN | 54 |
| HS-868 GREY | 34 | SKX | 40 | TAC 80 | 48 | NEO FORSA | 55 |
| IAMS 433 | 34 | SKX1LC | 40 | | | NEO PUYOL | 55 |
| IS-433 | 35 | SKX2LC | 40 | FORSA® | | NEO SERVIPARKING | 55 |
| IS-868 | 35 | SKX3LC | 41 | BUTTERFLY | 48 | NEO20 SEC | 55 |
| MAHS433 | 35 | SKX4LC | 41 | RT1 | 48 | TRIEME | 56 |
| S10 -433-AL | 35 | EMFA® | | RT2 | 49 | TWIN | 56 |
| S10 AL | 35 | BINARY | 41 | RT4 | 49 | KEY® | |
| S10 AL | 35 | TRINARY | 42 | TRIEME | 49 | 900SUB 44WR | 56 |
| S20-433-AL | 35 | ERONE® | | TWIN | 49 | 900TXB-42R | 56 |
| S20-868-AL | 36 | OVALI | 42 | TX26 | 49 | TXB 44R | 56 |
| S5-433-AL | 36 | ERREKA® | | TXE | 49 | TXG 44R | 56 |
| S5-868-AL | 36 | BARR | 42 | GENIUS® | | KING GATES® | |
| DITEC® | | BM | 42 | A252 | 49 | CLIPPER | 56 |
| BIX LG4 | 36 | CEME | 42 | AMIGO 868 | 49 | STYLO 4 | 56 |
| BIX LP2 | 36 | CLEM | 42 | AMIGOLD 2-4 868 | 50 | KLING® | |
| BIX LS2 | 36 | CLMX | 42 | BRAVO TE4433H | 50 | KUA2 | 56 |
| GOL4 | 36 | CLMY | 43 | ECHO | 50 | LABEL® | |
| GOL4C | 36 | CYJC | 43 | JA40 | 50 | SPYCO-1 | 56 |
| DOORHAN® | | JC | 43 | KILO 868 | 50 | SPYCO-3 | 57 |
| TRANSMITTER 2 | 37 | JJM | 43 | GIBIDI® | | LIFE® | |
| TRANSMITTER 4 | 37 | LUNA | 43 | AU1600 | 50 | FID02 | 57 |
| DOORMATIC® | | MATZ | 44 | AU1600 WOOD | 50 | FID04 | 57 |
| AM-300 | 37 | MATZ AZUL | 44 | AU1680 | 50 | TCP 2 | 57 |
| AZ-433 | 37 | MC | 44 | AU1680 WOOD | 50 | TCP 3 | 57 |
| EURO | 37 | MT | 44 | AU3000 DOMINO | 50 | TMW | 57 |
| DUCATI® | | RESON 2 | 44 | AU01590 | 51 | TMW | 57 |
| TE2 | 37 | RESON 4 | 44 | GIBIDI/OPEN OUT® | | LINEAR® | |
| TPR | 38 | RLT | 44 | L110 | 51 | LINEAR | 58 |
| TSAW | 38 | SGOX | 45 | TMB | 51 | LUTEC® | |
| TSAWN | 38 | SMAT | 45 | TSM | 51 | TRC4 | 58 |
| E-KING® | | TEMI | 45 | GOBBATO® | | MARANTEC® | |
| 433 | 38 | TENZ | 45 | RAD/B2S | 51 | 21R | 58 |
| 433 II | 38 | FAAC® | | GR® | | D23 | 59 |
| 433-M | 38 | 418 SL | 45 | GR 433 | 52 | HS4 868 BS | 59 |
| 868-4C | 38 | DL 2/4 868 SLH | 45 | GULLIVER® | | D384-868 | 59 |
| TX433 | 38 | R40 330 NEW | 46 | MDRS | 52 | DIGITAL 21 | 59 |
| TX868 | 38 | R40 330 OLD | 46 | MDW/2 | 52 | | |
| | | T433 SLH | 46 | HORMANN® | | | |
| | | T868 SLH | 46 | HS4 868 | 52 | | |
| | | TE433 HG | 46 | HS868 | 52 | | |
| ECE® | | TM 315 | 46 | | | | |
| 433 TX4 | 38 | TM1 300 | 46 | | | | |
| ECE 433 | 39 | TM1 868 DS | 46 | | | | |

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.



Air4 Residential Remotes

Air4 V PLUS (EU)

| | | | | | | | |
|--------------------|----|-----------------------|----|--------------------------------|----|------------------|----|
| DIGITAL 30 868 | 59 | MINI-NOVOTRON 302 | 65 | RIB® | | K-EASY NEW | 77 |
| DIGITAL 313 | 59 | MINI-NOVOTRON 402 | 66 | LITHIO | 71 | K-EASY OLD | 77 |
| DIGITAL 32 868 | 59 | MINI-NOVOTRON 502 | 66 | MOON | 72 | KEYGO GX523 | 77 |
| | | MINI-NOVOTRON 504 | 66 | SUN | 72 | KEYTIS RTS | 77 |
| MEDVA® | | MNHS | 66 | | | KEYTIS RTS NS | 78 |
| UNITECH-3E | 59 | NOVOTRON | 66 | ROGER® | | KEYTIS-NS-2-RTS | 78 |
| | | NOVOTRON 202 MB | 66 | TX10 | 72 | KEYTIS-NS-4-RTS | 78 |
| MHOUSE® | | NOVOTRON 502 MAX 43-2 | 66 | TX22 | 72 | MITTO | 78 |
| GTX4 | 60 | NOVOTRON 504 MAX 43-4 | 66 | ROLLTORE® | | TELIS 1-4 RTS | 78 |
| TX-3-4 | 60 | | | MPSTFE | 72 | TS 433 | 78 |
| TX3 | 60 | O&O® | | R330 | 72 | SOMMER® | |
| | | ELIOT | 67 | R40 | 73 | 4010 | 78 |
| MOOVO® | | RAY | 67 | R40-330 NEW | 73 | 4020 TX03-868 | 78 |
| MT4 | 60 | T.COM R4-2 | 67 | ROPER® | | 4025 433 | 79 |
| | | T.COM R8-4 | 67 | TRINARY | 73 | 4025 868 | 79 |
| MOTORSTAR® | | TX | 67 | SABUTOM® | | 4026 TX03-868 | 79 |
| CLIKSTAR 53 | 61 | | | BROOVER 3P | 73 | TRX-55-868-4 | 79 |
| NEW GATE® | | PORTAMATIC® | | BROSTAR | 73 | TX03-434-2-XP | 79 |
| NOV03 | 61 | MPH | 67 | NOVO | 73 | TX03-868-2-XP | 80 |
| | | MPSA | 68 | SEA® | | TX03-868-4-XP | 80 |
| NICE® | | MPSN | 68 | COCCINELLA ROLL CARBON | 74 | STAGNOLI® | |
| EASY S | 61 | PORTIS® | | COCCINELLA ROLL GREY | 74 | KALLISTO | 80 |
| ERA ON1E | 62 | GO PRO MINI | 68 | COCCINELLA ROLL RED | 74 | VENUS AV223 | 80 |
| ERA ON1E FM | 62 | TELTIS | 68 | EC 433 | 74 | ZEUS AZ442 | 80 |
| ERA ON2E | 62 | PRASTEL® | | HEAD 2 433 | 74 | TAU® | |
| ERA ON2E FM | 62 | BFOR | 68 | HEAD 4 433 | 74 | 250 K SLIM | 80 |
| ERA ON4E | 62 | KMFT | 68 | HEAD ROLL 868-2 | 74 | 250 SLIM RP | 80 |
| ERA ON4E FM | 62 | KMFTP | 68 | SMART DUAL | 75 | 250 T4 RC | 80 |
| ERA ON9E FM | 62 | MPSTFE | 68 | SMART DUAL 433 | 75 | 250-BUG 2 | 80 |
| ERA-FL01R | 62 | MPSTFE 2RE | 69 | SEAV® | | 250-BUG 4 | 80 |
| ERA-FL02R | 62 | MPSTFE RJ | 69 | BE HAPPY RS1 NEW | 75 | TEDSEN® | |
| ERA-FL04R | 63 | MPSTL E | 69 | BE HAPPY RS2 NEW | 75 | SKJ | 81 |
| ERGO | 63 | MPSTP2E | 69 | BE HAPPY RS3 NEW | 75 | SKX | 81 |
| FL01 | 63 | MTE | 69 | BE HAPPY S1 | 75 | SKX DL | 81 |
| FL01R-S | 63 | NCSMT4P-A | 69 | BE HAPPY S2 | 75 | SKX HD | 81 |
| FL02 | 63 | SLIM 4E | 69 | BE HAPPY S3 | 75 | SKX HD | 81 |
| FL02R-S | 63 | TC4E | 69 | SERAI® | | SKX LC | 81 |
| FL04 | 63 | TRQ4P | 69 | SER 310 | 75 | SKX MD | 81 |
| FL04R-S | 63 | PROEM® | | | | SKX SL | 81 |
| INTI | 63 | ER4C4ACS | 70 | SILVELOX® | | SM | 81 |
| ON4 | 63 | ERC/ACD | 70 | 3107467 VITE BIANCA | 75 | TELCOMA® | |
| SMILO SM2 | 64 | | | TSM | 76 | EDGE | 82 |
| SMILO SM4 | 64 | | | SIMBA® | | FM 402 | 82 |
| VERY VR | 64 | | | RC | 76 | FM 402 | 82 |
| NOLOGO® | | PUJOL® | | | | FM 404 | 82 |
| SMILE-R | 64 | ET | 70 | SIMINOR® | | FM 404 E | 82 |
| | | MARTE | 70 | CVX | 76 | NOIRE E | 82 |
| NORMSTAHL® | | NEO | 70 | CVXNL | 76 | RCS | 83 |
| EA433-K | 64 | P15 | 70 | ERXC4ACS / ER2C4ACS / ER4C4ACS | 76 | TANGO SLIM | 83 |
| EA433-KM | 64 | TWIN | 70 | MITTO | 76 | V2® | |
| RCU 4332K | 64 | VARIO 3 BLACK | 71 | SIM433 | 77 | HANDY | 83 |
| RCU433 4K | 64 | VARIO 3 OCEAN | 71 | SIM433 | 77 | PHOENIX 433 | 83 |
| | | VARIO MARS | 71 | | | PHOX 433 | 83 |
| NORTON® | | QTRON® | | | | TPR-43KF | 84 |
| TXE | 65 | QT1000 TX1 433CH | 71 | SOMFY® | | TRC | 84 |
| | | QT1005 TX3 433CH | 71 | ALARMA | 77 | TSC | 84 |
| NOVOFERM® | | QT1010 TX4 433CH | 71 | CVX | 77 | TXC2 | 84 |
| HS 43-1E | 65 | QUASAR® | | K-EASY | 77 | | |
| M512 | 65 | BETA | 71 | | | | |
| MCHS | 65 | ETA | 71 | | | | |
| MICRO-NOVOTRON 312 | 65 | TX S433 2 | 71 | | | | |
| MICRO-NOVOTRON 512 | 65 | | | | | | |

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.

Air4 V PLUS (EU)

TXC4 84

VDS®
ECO-R 84
TRQ 2P/4P 84

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.



Air4 Residential Remotes

Air4 V PLUS (IB)

| | | | | | | | |
|-------------------------|---|-----------------|----|----------------------------|----|-------------------------------------|----|
| ACM® | | 4020-TX03-434 | 8 | TW4 K | 16 | BE HAPPY S 2P | 23 |
| TX2 | 1 | TX02-434-2 | 8 | | | BE HAPPY S 3P | 23 |
| TX4 | 1 | TX02-434-2 | 8 | | | BE HAPPY S AZUL 1P | 23 |
| | | | | | | BE HAPPY S AZUL 2P | 23 |
| ADYX® | | | | BERNAL® | 16 | BE HAPPY S AZUL 3P | 23 |
| 433-HG BRAVO | 1 | TM4 | 8 | RCBE | 17 | ERTS4C | 23 |
| TE443H BLUE | 1 | TR2 | 9 | SKJ | 17 | MPSTFRC | 23 |
| TM-433 | 1 | TR4 | 9 | SKX MD | 17 | MTE | 23 |
| | | TXM | 9 | | | VTM | 23 |
| AERF® | | | | BERNER TORANTRIEBE® | | | |
| BT | 1 | | | SKX MD | 17 | | |
| COMPACT | 1 | ATODOR® | | | | | |
| HY-DOM | 1 | G4330 E | 9 | BFT® | | | |
| MARS | 1 | G4332 E | 9 | GHIBLI | 17 | C-2 | 24 |
| MARS | 1 | G4333 E | 9 | KLEIO | 17 | DR-2 | 24 |
| MERCURY B | 2 | G4335 E | 9 | MITTO 2 | 17 | DW-2 | 25 |
| MERCURY B | 2 | | | MITTO 2/4A | 17 | ME | 25 |
| MERCURY C | 2 | | | MITTO 2/4M | 17 | ME-B | 25 |
| MERCURY C | 2 | AUTELCO® | | MITTO 4 | 18 | MOVICODE | 25 |
| SABUTON | 2 | EMB | 10 | MITTO RCB02 | 18 | RW-2 | 25 |
| SATURN | 2 | TX300 | 10 | MITTO RCB04 | 18 | SAW | 26 |
| ST3/N | 2 | TX300T | 10 | RB MURALE | 18 | SE | 26 |
| TERRA | 2 | | | TE01 | 18 | SE-1 | 26 |
| TMP-1 | 2 | AVIDSEN® | | TE02 | 18 | SE-1B | 26 |
| TMP-2 | 2 | 104250 | 10 | TE04 | 18 | SE-B | 26 |
| TTS | 3 | 104250 OLD2 | 10 | TFQ | 18 | X-2 | 26 |
| UNITECH | 3 | 104250 RED | 10 | TRC 2/4 | 18 | Z-2 | 26 |
| | | 104251 | 10 | TX2 306 | 19 | | |
| | | 104257 | 10 | VTM | 19 | CHAMBERLAIN/LIFT MASTER/M... | |
| | | 104350 | 11 | | | 132B2372 | 26 |
| ALFA TORRES® | | 654250 | 11 | CAME® | | 1A5477 | 26 |
| RT1 - RT2 ALFA | 3 | | | TOP432EV | 19 | 1A5639-7 | 26 |
| TP2 MINI | 3 | B&B® | | TOP432NA | 19 | 1A6487 | 27 |
| | | EMY N | 11 | TOP432S | 19 | 371 LM | 27 |
| ALLMATIC® | | | | TOP432SA | 19 | 4335EML | 27 |
| ASMX2 | 4 | B&D® | | TOP434A | 20 | 433EML | 27 |
| ASMY | 4 | 62170 | 11 | TOP434M | 20 | 84330E | 27 |
| B.RO 2WN | 4 | PTX4 | 11 | TOP862NA | 20 | 84330EML/84333EML/84335EML | 27 |
| B.RO 3WN | 4 | | | TWIN | 20 | 8747EML | 27 |
| B.RO 4WN | 4 | BECKER® | | | | 94330EML/94333EML/94335EML | 27 |
| B.RO OVER | 4 | MICRO | 12 | CARDALE DOORS® | | 94334CE | 27 |
| B.RO WN RED | 4 | | | 433 | 20 | 94334E | 27 |
| MINIPASS | 5 | BELFOX® | | 433 II | 20 | 94335E | 28 |
| PASS | 5 | 773 | 13 | 433-M | 20 | 953ESTD | 28 |
| TECH3 | 5 | 783 | 13 | 868-4C | 20 | 953ESTD | 28 |
| ALLTRONIK® | | 7834-MINI | 13 | | | 953ESTD | 28 |
| S425 | 6 | DHS 7 | 14 | CARDIN® | | 971 LM | 28 |
| ALUKON® | | | | S437 TX | 20 | 9747E | 28 |
| COMFORT 220 | 6 | BENINCA® | | S438 TX | 20 | G4330E | 28 |
| MT87A1 | 6 | APPLE | 14 | S449 QZ1 | 21 | | |
| | | CUPIDO 2/4 | 14 | S449 QZ2 | 21 | CIMESA® | |
| | | IO.2WV BLUE | 14 | S449 QZ3 | 21 | EM | 28 |
| | | IO.2WV ORANGE | 14 | S449 QZ4 | 21 | | |
| ALULUX® | | LOT A | 14 | S486 QZ1 OLD | 21 | CLEMSA® | |
| DIGITAL 302 | 6 | LOT W | 15 | S486 QZ2 OLD | 21 | D | 28 |
| DIGITAL 302 | 6 | LOT WMS | 15 | S486 QZ3 OLD | 22 | DIGICODE MH | 28 |
| MT87A1 | 7 | LOT X | 15 | S486 QZ4 | 22 | E | 29 |
| | | LOT XPS | 15 | TXQ 486 | 22 | E-300 | 29 |
| ANSONIC® | | LOT XW | 15 | TXQ 486 NEW | 22 | E-600 | 29 |
| SA434 | 7 | LOT2WCV | 15 | TXQ S449 GREEN | 22 | E-CODE N | 29 |
| SF433 | 8 | ROLLKEY | 15 | | | E20 | 29 |
| | | T4 WV | 15 | CASALI® | | EM | 29 |
| APERTO® | | T0.G02 WV | 15 | JA332 AMIGO 868 | 22 | FA | 29 |
| CPS | 8 | T0.G04 WV | 15 | | | M-60 | 29 |
| | | T0.GOQV | 16 | CASIT® | | MASTERCODE | 29 |
| APERTO (SOMMER)® | | T0.GOWP | 16 | BE HAPPY S 1P | 22 | MH | 30 |

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.

Air4 V PLUS (IB)

| | | | | | | | |
|--------------------|----|-------------------|----|-----------------|----|-------------------------|----|
| MH-E | 30 | GOL4C | 36 | ERREKA® | | FORSA® | |
| MT | 30 | | | BARR | 42 | BUTTERFLY | 48 |
| MT-X | 30 | DMIL® | | BM | 42 | MINI GO | 48 |
| MT-Y | 30 | GO | 36 | CEME | 42 | RT1 | 48 |
| MT-Z | 30 | NEO10 DMIL | 36 | CLEM | 42 | RT2 | 49 |
| MUTANCODE T2 | 30 | TWIN | 37 | CLMX | 42 | RT4 | 49 |
| T | 30 | | | CLMY | 43 | TRIEME | 49 |
| T-8 | 30 | DOORMATIC® | | CYJC | 43 | TWIN | 49 |
| CYACSA® | | AM-300 | 37 | IRIS 2/4 433 | 43 | TX26 | 49 |
| MINI GO | 31 | AZ-433 | 37 | IRIS 2/4 868 | 43 | TXE | 49 |
| NEO | 31 | EURO | 37 | JC | 43 | | |
| TWIN | 31 | MILENY | 37 | JJM | 43 | GENIUS® | |
| DASPI® | | DUCATI® | | LIRA 433 | 43 | AMIGO 868 | 49 |
| ZERO 2 RC | 31 | TE2 | 37 | LIRA 868 | 43 | AMIGOLD 2-4 868 | 50 |
| ZERO 4 RC | 31 | TPR | 38 | LUNA | 43 | BRAVO TE4433H | 50 |
| | | TSAW | 38 | MATZ | 44 | ECHO | 50 |
| | | TSAWN | 38 | MATZ AZUL | 44 | JA40 | 50 |
| DEA SYSTEM® | | | | MC | 44 | KILO 868 | 50 |
| 306 | 31 | E-KING® | | MT | 44 | | |
| GENIE R 273 | 32 | 433 | 38 | RESON 2 | 44 | GIBIDI® | |
| GENIE S | 32 | 433 II | 38 | RESON 4 | 44 | AU1600 | 50 |
| GENIE S 263L | 32 | 433-M | 38 | RLT | 44 | AU1600 WOOD | 50 |
| GOLD 238 S1 | 32 | 868-4C | 38 | ROLLER 2 433 | 44 | AU1680 | 50 |
| GOLD 238 S2 | 32 | TX433 | 38 | ROLLER 2 868 | 44 | AU1680 WOOD | 50 |
| GOLD 239 S4 | 32 | TX868 | 38 | ROLLER 4 868 | 44 | AU3000 DOMINO | 50 |
| GOLD 306 | 32 | | | SGOX | 45 | AU01590 | 51 |
| GOLD R | 32 | ECE® | | SMAT | 45 | | |
| MIO TD | 32 | 433 TX4 | 38 | SOL 2/4R 433 | 45 | GIBIDI/OPEN OUT® | |
| PUNTO 268 | 33 | ECE 433 | 39 | SOL 2/4R 868 | 45 | L110 | 51 |
| PUNTO 278 | 33 | | | TEMI | 45 | TMB | 51 |
| TR2/4 | 33 | ECOSTAR® | | TENZ | 45 | TSM | 51 |
| DELMA® | | 40 | 39 | VEGA 2/4 433 | 45 | GOBBATO® | |
| APOLLO-300-4 | 33 | EINHELL® | | VEGA 2/4 868 | 45 | RAD/B2S | 51 |
| APOLLO-433-4 | 33 | HS433 | 39 | FAAC® | | GR® | |
| APOLLO-433-4 NEW | 33 | | | 418 SL | 45 | GR 433 | 52 |
| KING-433 | 33 | ELBE® | | DL 2/4 868 SLH | 45 | | |
| MIZ-300 | 33 | 50 | 39 | R40 330 NEW | 46 | GULLIVER® | |
| MIZ-433 | 33 | | | R40 330 OLD | 46 | MDRS | 52 |
| DETUMANDO® | | ELEMAT® | | T433 SLH | 46 | MDW/2 | 52 |
| DTM ROLL | 34 | EL2 PLUS | 39 | T868 SLH | 46 | HORMANN® | |
| | | MINI TEC 2C | 40 | TE433 HG | 46 | HS4 868 BS | 52 |
| | | TRINARY | 40 | TM 315 | 46 | HS868 | 52 |
| DICKERT® | | | | TM 3100 | 46 | | |
| HS-868 | 34 | ELKA® | | TM1 868 DS | 46 | HSE 433 | 52 |
| HS-868 GREY | 34 | SK | 40 | TM2 300 | 46 | HSE2 868 BS | 52 |
| IAMS 433 | 34 | SKX | 40 | TM2 300S | 46 | HSM 433 | 52 |
| IS-433 | 35 | SKX1LC | 40 | TML 433 SLH | 47 | HSM4 868 | 53 |
| IS-868 | 35 | SKX2LC | 40 | TML2 433 SLR | 47 | HSP4-868 | 53 |
| MAHS433 | 35 | SKX3LC | 41 | TML4 433 SLR | 47 | | |
| S10 -433-AL | 35 | SKX4LC | 41 | XT4 433 SLH | 47 | JCM® | |
| S10 AL | 35 | | | XT4 433RC-BE | 47 | BINARY | 53 |
| S10 AL | 35 | EMFA® | | XT4 868 SLH | 47 | CYACSA GO | 53 |
| S20-433-AL | 35 | BINARY | 41 | FADINI® | | DMIL GO | 53 |
| S20-868-AL | 36 | MA0868 | 41 | ASTRO 433 | 47 | EB | 53 |
| S5-433-AL | 36 | MAP433 | 41 | ASTRO 433M | 47 | EF | 53 |
| S5-868-AL | 36 | NEO | 41 | JUBI 433 | 48 | EM | 53 |
| | | TE3 | 41 | JUBI 433/2 TR | 48 | ET | 53 |
| DITEC® | | TRINARY | 42 | JUBI SMALL | 48 | FORSA GO | 53 |
| BIX LG4 | 36 | TWIN | 42 | | | FORSA GO | 54 |
| BIX LP2 | 36 | | | FERPORT® | | GO | 54 |
| BIX LS2 | 36 | ERONE® | | TAC 80 | 48 | GO CUBELLS | 54 |
| GOL4 | 36 | OVALI | 42 | | | GO GIBIDI | 54 |

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.



Air4 Residential Remotes

Air4 V PLUS (IB)

| | | | | | | | |
|--------------------|----|------------------------|----|-----------------------|----|--------------------------------|----|
| GO MINI-NTN | 54 | E945M | 60 | NOVOTRON | 66 | ROLLTORE® | |
| GO-2 ANTONIO ONECA | 54 | | | NOVOTRON 202 MB | 66 | MPSTFE | 72 |
| GO2 EMFA | 54 | MERLIN/PROLIFT® | | NOVOTRON 502 MAX 43-2 | 66 | R330 | 72 |
| HYDOM GO | 54 | C940 | 60 | NOVOTRON 504 MAX 43-4 | 66 | R40 | 73 |
| MINI GO2 NTN | 54 | C943 | 60 | | | R40-330 NEW | 73 |
| NEO DMIL | 54 | C945 | 60 | O&O® | | | |
| NEO EMFA | 55 | M842 (GREEN) | 60 | ELIOT | 67 | ROPER® | |
| NEO FORSA | 55 | M844 (GREEN) | 60 | RAY | 67 | GO | 73 |
| NEO PUYOL | 55 | | | T.COM R4-2 | 67 | NEO | 73 |
| NEO SERVIPARKING | 55 | MHOUSE® | | T.COM R8-4 | 67 | NER1 DCS | 73 |
| NEO10+KOM | 55 | GTX4 | 60 | TX | 67 | TRINARY | 73 |
| NEO20 SEC | 55 | TX-3-4 | 60 | PORTAMATIC® | | SABUTOM® | |
| NORTON GO | 55 | TX3 | 60 | MPH | 67 | BROOVER 3P | 73 |
| TECHG02 | 55 | | | MPSA | 68 | BROSTAR | 73 |
| TECHG04 | 55 | MOOVO® | | MPSN | 68 | NOVO | 73 |
| TRIEME | 56 | MT4 | 60 | PORTIS® | | SEA® | |
| TWIN | 56 | | | GO PRO MINI | 68 | COCCINELLA ROLL CARBON | 74 |
| KEY® | | MOTORSTAR® | | TELTS | 68 | COCCINELLA ROLL GREY | 74 |
| 900SUB 44WR | 56 | CLIKSTAR 53 | 61 | PRASTEL® | | COCCINELLA ROLL RED | 74 |
| 900TXB-42R | 56 | | | BFOR | 68 | EC 433 | 74 |
| TXB 44R | 56 | NEW GATE® | | KMFT | 68 | HEAD 2 433 | 74 |
| TXG 44R | 56 | NOV03 | 61 | MPSTFE | 68 | HEAD 4 433 | 74 |
| KING GATES® | | NICE® | | MPSTFE 2RE | 69 | HEAD ROLL 868-2 | 74 |
| CLIPPER | 56 | EASY S | 61 | MPSTFE RJ | 69 | SMART DUAL | 75 |
| STYLO 4 | 56 | ERA ON1E | 62 | MPSTL E | 69 | SMART DUAL 433 | 75 |
| LABEL® | | ERA ON1E FM | 62 | PROEM® | | SEAV® | |
| SPYCO-1 | 56 | ERA ON2E | 62 | ER4C4ACS | 70 | BE HAPPY RS1 NEW | 75 |
| SPYCO-3 | 57 | ERA ON2E FM | 62 | ERC/ACD | 70 | BE HAPPY RS2 NEW | 75 |
| LEB® | | ERA-FLO1R | 62 | PUJOL® | | BE HAPPY RS3 NEW | 75 |
| TCP 2 | 57 | ERA-FLO2R | 62 | ET | 70 | BE HAPPY S1 | 75 |
| TCP 3 | 57 | ERA-FLO4R | 63 | MARTE | 70 | BE HAPPY S2 | 75 |
| TMW | 57 | ERGO | 63 | NEO | 70 | BE HAPPY S3 | 75 |
| TMW | 57 | FLO1 | 63 | P15 | 70 | SERAI® | |
| | | FLO1R-S | 63 | TWIN | 70 | SER 310 | 75 |
| LIFE® | | FLO2 | 63 | VARIO 3 BLACK | 71 | SIMBA® | |
| FID02 | 57 | FLO2R-S | 63 | VARIO 3 OCEAN | 71 | RC | 76 |
| FID04 | 57 | FLO4 | 63 | VARIO MARS | 71 | SIMINOR® | |
| VIP2 | 57 | FLO4R-S | 63 | QUASAR® | | CVX | 76 |
| VIP2R | 57 | INTI | 63 | BETA | 71 | CVXNL | 76 |
| VIP4 | 58 | ON4 | 63 | ETA | 71 | ERXC4ACS / ER2C4ACS / ER4C4ACS | 76 |
| VIP4R | 58 | SMILO SM2 | 64 | TX S433 2 | 71 | MITTO | 76 |
| | | SMILO SM4 | 64 | RIB® | | SIM433 | 77 |
| LINEAR® | | VERY VR | 64 | LITHIO | 71 | SIM433 | 77 |
| LINEAR | 58 | NORTON® | | MOON | 72 | SOMFY® | |
| | | NEO40-NTN | 65 | SUN | 72 | ALARMA | 77 |
| MARANTEC® | | TXCD | 65 | ROGER® | | CVX | 77 |
| 21R | 58 | TXE | 65 | TX10 | 72 | K-EASY | 77 |
| D23 | 59 | | | TX22 | 72 | K-EASY NEW | 77 |
| D384-868 | 59 | NOVOFERM® | | | | K-EASY OLD | 77 |
| DIGITAL 21 | 59 | HS 43-1E | 65 | | | KEYGO GX523 | 77 |
| DIGITAL 30 868 | 59 | M512 | 65 | | | KEYTIS RTS | 77 |
| DIGITAL 313 | 59 | MCHS | 65 | | | KEYTIS RTS NS | 78 |
| DIGITAL 32 868 | 59 | MICRO-NOVOTRON 312 | 65 | | | KEYTIS-NS-2-RTS | 78 |
| | | MICRO-NOVOTRON 512 | 65 | | | KEYTIS-NS-4-RTS | 78 |
| MEDVA® | | MINI-NOVOTRON 302 | 65 | | | KEYTIS NS 4-RTS | 78 |
| UNITECH-3E | 59 | MINI-NOVOTRON 402 | 66 | | | MITTO | 78 |
| | | MINI-NOVOTRON 502 | 66 | | | TELIS 1-4 RTS | 78 |
| MERLIN 2.0® | | MINI-NOVOTRON 504 | 66 | | | TS 433 | 78 |
| E940M | 59 | MNHS | 66 | | | | |
| E943M | 59 | | | | | | |

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.

Air4 V PLUS (IB)

SOMMER®

| | |
|---------------|----|
| 4010 | 78 |
| 4020 TX03-868 | 78 |
| 4025 433 | 79 |
| 4025 868 | 79 |
| 4026 TX03-868 | 79 |
| TRX-55-868-4 | 79 |
| TX03-434-2-XP | 79 |
| TX03-868-2-XP | 80 |
| TX03-868-4-XP | 80 |

STAGNOLI®

| | |
|------------|----|
| ZEUS AZ442 | 80 |
|------------|----|

TAU®

| | |
|-------------|----|
| 250 K SLIM | 80 |
| 250 SLIM RP | 80 |
| 250 T4 RC | 80 |
| 250-BUG 2 | 80 |
| 250-BUG 4 | 80 |

TEDSEN®

| | |
|--------|----|
| SKJ | 81 |
| SKX | 81 |
| SKX DL | 81 |
| SKX HD | 81 |
| SKX HD | 81 |
| SKX LC | 81 |
| SKX MD | 81 |
| SKX SL | 81 |
| SM | 81 |

TELCOMA®

| | |
|------------|----|
| EDGE | 82 |
| FM 402 | 82 |
| FM 402 | 82 |
| FM 402 E | 82 |
| FM 404 | 82 |
| FM 404 E | 82 |
| NOIRE E | 82 |
| RCS | 83 |
| TANGO SLIM | 83 |

V2®

| | |
|-------------|----|
| HANDY | 83 |
| PHOENIX 433 | 83 |
| PHOX 433 | 83 |
| TPR-43KF | 84 |
| TRC | 84 |
| TSC | 84 |
| TXC2 | 84 |
| TXC4 | 84 |

VDS®

| | |
|-----------|----|
| ECO-R | 84 |
| TRQ 2P/4P | 84 |



Air4 Residential Remotes

Air4 Q

| | | | | | | | |
|-------------------------|----|----------------------------|----|--------------------|----|-------------------------|----|
| ALBANO® | | MAXI | 12 | KG | 25 | FORC 441 | 48 |
| MICRO TRINARY-B | 3 | MINI | 12 | MK | 25 | | |
| TX-MICROTRINARY | 3 | | | | | | |
| TX-PLC | 3 | | | | | | |
| TX-PR | 3 | BELFOX® | | | | | |
| TX-TRINARY | 3 | 712 | 12 | CLEMSA® | | FORSA® | |
| | | 712 | 12 | F/C | 29 | GAMMA27 | 48 |
| | | 713 | 13 | TX-K | 30 | S27M | 49 |
| | | 723 | 13 | TX-L | 31 | STX | 49 |
| ALLMATIC® | | 733 | 13 | TX-M | 31 | | |
| AKMX | 3 | 735 | 13 | TX-ML | 31 | GIBIDI/OPEN OUT® | |
| AKMX | 4 | 743 | 13 | TX-P | 31 | ARM AU01530 | 51 |
| AKMY | 4 | 745 | 13 | DEA SYSTEM® | | ARM AU01540 | 51 |
| AKMY | 4 | DHS 7 | 13 | DEA31 | 32 | MTQ 30-8 | 51 |
| ALLTRONIK® | | DHS 7 | 14 | DELMA® | | MTQ 40 | 51 |
| S206 | 5 | DX | 14 | KING-40 | 33 | | |
| S215 | 5 | DX | 14 | DICKERT® | | GR® | |
| S235 | 5 | | | AHS27 | 34 | GR 30-875 | 51 |
| S406 | 5 | BENINCA® | | AHS40 | 34 | GULLIVER® | |
| S406 | 5 | LOT E | 14 | DX27 | 34 | MDRQ | 52 |
| S415 | 5 | TX4 BLUE | 16 | DX40 | 34 | HORMANN® | |
| S415 | 5 | | | FHS10-B | 34 | HS40 | 52 |
| S435 | 6 | BERNAL® | | IAMS 40 | 34 | JCM® | |
| S435 | 6 | 36527 | 16 | IFMS20 | 35 | P115 | 55 |
| S435-B | 6 | BE27L | 16 | MAHS27 | 35 | LEB® | |
| S435-B | 6 | BS40L | 16 | MAHS40 | 35 | TQ | 57 |
| ALULUX® | | S521 | 16 | | | LINEAR® | |
| H-S40 | 6 | SERIE N | 16 | | | MULTICODE | 58 |
| MS 40 | 7 | BERNER TORANTRIEBE® | | DORMA® | | MARANTEC® | |
| MT 40A | 7 | S27L | 17 | MS41-2 | 37 | DIGITAL 21 | 59 |
| RATOR 40 | 7 | S40L | 17 | S41-1 | 37 | | |
| ALUTEC® | | BFT® | | ECOSTAR® | | NICE® | |
| RFKCO-40-5 | 7 | T0 | 18 | ECOSTAR | 39 | BIO BTK 27120 | 61 |
| T102497-40-5 | 7 | TZSP | 19 | | | BIO BTK 30875 | 61 |
| T397-40-2 | 7 | | | ELEMAT® | | BIO BTK 40685 | 61 |
| ANSONIC® | | CAME® | | K30 | 39 | EASY-K 30875 | 61 |
| SA40 | 7 | MT | 19 | QUARTZ | 40 | EASY-KM | 61 |
| SF40 | 7 | TCH | 19 | ELERO® | | EASY-KM 27120 | 61 |
| | | TOP302M | 19 | RFKCO-40-5 | 40 | EASY-KM 30875 | 61 |
| APERTO® | | CARDIN® | | T102497-40-5 | 40 | EASY-KM 40685 | 62 |
| RFKCO-40-5 | 8 | S466 PROG | 21 | T397-40-2 | 40 | NORMSTAHL® | |
| T102497-27-5 | 8 | S466 TX | 21 | ELKA® | | T12018 | 64 |
| T102497-40-5 | 8 | S466 TX29875 | 21 | SLX | 41 | T12030 | 64 |
| T397-40-2 | 8 | S476 TX4 | 21 | SM | 41 | T40 | 65 |
| ATODOR® | | S738 TX | 22 | EMFA® | | NOVOFERM® | |
| G750 EML | 9 | S738 TX27195 | 22 | QUARTZ | 41 | MS41 | 66 |
| ATTAS / DICKERT® | | CDS® | | ERONE® | | S41 | 66 |
| HS DX27 | 10 | 801016F27 | 23 | OVALI QUARTZ 27 | 42 | T102497-40-5 | 67 |
| | | 807117D | 24 | OVALI QUARTZ 30 | 42 | NOVOTECNIA® | |
| AUTODOOR® | | CELINSA® | | ERREKA® | | BITV | 67 |
| 1A4443-2 | 10 | AK | 24 | EL | 43 | BIX | 67 |
| B&B® | | AK-B | 24 | FAAC® | | PRASTEL® | |
| QTE | 11 | AK-C | 24 | TMN | 47 | KMFT | 68 |
| BECKER® | | AK-D | 24 | TMN | 47 | KMFPT | 68 |
| 4K | 12 | AK-G | 24 | FOCEBAT® | | MPSTLQ | 69 |
| 4K MINI OR MAXI | 12 | AK-L | 24 | FORC 141 | 48 | PROEM® | |
| K | 12 | AK-P | 24 | | | | |
| K | 12 | EK | 25 | | | | |
| K | 12 | K | 25 | | | | |
| | | K-B | 25 | | | | |

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.

Air4 Residential Remotes



Air4 Q

ERC/C27 70

PROGET®
QTE 70

PUJOL®
PJ 70

RIB®
MOON 72
T91 72
T91 72

ROLLTORE®
KMFTP 30385 72
R40-29.90 NEW 73

SEA®
AGTD 74
EC 30900 74
EC 40685 74

SIMBA®
CVG 76

SIMINOR®
CVM 76
CVS 76
EM47 76
S38 77

SOMFY®
OLD 78
RCS 78

SOMMER®
S435-40 79
S435-B 79
S501 79
T102497-27-5 79
T397-40-2 79

TELCOMA®
131500 81
FOX 230 82
FOX 440 82
RCK 82
RCKT 83
RCKTM 83

V2®
TCQ-30 83
TNQ 83
TPQ-AF 83

As per current legal rights relating to industrial property, we hereby inform you that the trademarks or brand names mentioned in our document are the exclusive property of the manufacturers of remote controls and authorised users. Such trademarks or brand names are given simply by way of information for the purpose of rapidly recognising the product. This document is reserved for professional duplicators who use Silca Air4 remote controls. The illustrations and technical data regarding remote controls given in this document are to be considered indicative. Silca reserves the right to make any modifications it deems necessary and opportune to improve the quality of Air4, without altering its essential characteristics.



Legal Notes

In compliance with current regulations relating to industrial property, we hereby state that the trademarks or trade names mentioned in this document are the exclusive property of authorized manufacturers of residential remotes and users. All said trade-marks or trade names are nominated only for the purposes of information so that any remote can be rapidly identified. This document is reserved exclusively for professionals who use Silca Air4 remotes.

All information and illustrations in this document are for guidance only. Silca reserves the right to alter Air4 product design, dimensions or info to improve the product quality.

In conformità alle disposizioni legali in vigore relative alle proprietà industriali, informiamo che i marchi o le denominazioni commerciali citate nel nostro documento sono di proprietà esclusiva dei Fabbrianti di Radiocomandi e degli utilizzatori autorizzati. Questi marchi o denominazioni commerciali sono indicati a titolo di semplice informazione, con lo scopo di riconoscere velocemente il prodotto. Questo documento è esclusivamente riservato ai professionisti della riproduzione che utilizzano radiocomandi Air4 Silca.

Le illustrazioni e i dati tecnici dei radiocomandi contenuti nel documento debbono considerarsi indicativi. Silca si riserva il diritto, ferme restando le caratteristiche essenziali di Air4, di apportare tutte le modifiche che ritiene necessarie e opportune al fine di migliorarne la qualità.

Entsprechend den geltenden Vorschriften zum Schutz der gewerblichen Rechte teilen wir mit, dass die Marken oder Handelsbezeichnungen, die in diesem Dokument genannt werden ausschließlich Eigentum der Hersteller der Fernbedienungen und der berechtigten Benutzer sind. Besagte Marken oder Handelsnamen werden nur zur Information bzw. zu schnellere Identifizierung erwähnt. Dieses Dokument richtet sich ausschließlich an die Schlüsselprofis, die die Fernbedienungen Air4 Silca verwenden.

Die Bilder und die technischen Daten der Fernbedienungen in dieser Broschüre sind nicht verbindlich. Silca behält sich das Recht vor alle Änderungen vorzunehmen, die zur Verbesserung der Qualität beitragen, ohne die wesentlichen Merkmale der Air4 zu modifizieren.

Conformément aux dispositions légales en vigueur en matière de propriété industrielle, nous vous informons que les marques ou les appellations commerciales citées dans notre document appartiennent exclusivement aux Fabricants des Radiocommandes et aux utilisateurs autorisés. Ces marques ou dénominations commerciales sont données à titre d'information uniquement dans le but d'identifier rapidement le produit. Ce document est réservé exclusivement aux professionnels de la reproduction de clés qui utilisent des radiocommandes Air4 Silca.

Les illustrations et les caractéristiques techniques des radiocommandes contenues dans le document sont indicatives. Silca se réserve, sans préjudice des caractéristiques essentielles d'Air4, d'apporter toutes les modifications qu'elle estimera nécessaires et opportunes dans le cadre d'une amélioration de la qualité.

Air4 Catalogue - P0QM-3

Issued by Silca S.p.A. - Vittorio Veneto, May 2018

Legal Notes



En cumplimiento de las disposiciones legales vigentes relativas a la propiedad industrial, informamos que las marcas o las denominaciones comerciales citadas en nuestro documento son propiedad exclusiva de los fabricantes de radiomandos y de los usuarios autorizados. Estas marcas o denominaciones comerciales se indican a título puramente informativo para reconocer rápidamente el producto. Este documento se reserva exclusivamente a los profesionales de la reproducción que usan los radiomandos Air4 Silca.

Las ilustraciones y los datos técnicos de los radiomandos contenidos en el documento han de considerarse indicativos. Silca se reserva el derecho - sin alterar las características esenciales de Air4 - de aportar todas las modificaciones que considere necesarias y oportunas para mejorar la calidad del producto.

Em conformidade com as disposições legais em vigor relativas à propriedade industrial, informamos que as marcas ou as denominações comerciais citadas na nossa documentação são propriedade exclusiva dos Fabricantes de Rádio Comandos e dos utilizadores autorizados. Essas marcas ou denominações comerciais são indicadas simplesmente a nível de informação, a fim de reconhecer rapidamente o produto. Este documento é reservado exclusivamente aos profissionais da reprodução que utilizam rádio comandos Air4 Silca.

As figuras e as características técnicas dos rádio comandos contidas no documento são facultadas a título indicativo. A Silca reserva-se o direito, ficando assentes as características essenciais de Air4, de produzir todas as alterações que julgar necessárias e oportunas com o fim de melhorar a sua qualidade.

Graag vestigen wij de aandacht op het feit dat, in overeenstemming met de wettelijke beschikkingen die van kracht zijn inzake industriële eigendommen, de in ons document geciteerde commerciële benamingen en merken exclusieve eigendom zijn van de betreffende fabrikanten van afstandsbedieningen en geautoriseerde gebruikers. Deze commerciële benamingen en merken worden zuiver informatief vermeld, met enkel als doel het product sneller te identificeren. Dit document is exclusief bestemd voor professionele sleutelmakers die Silca Air4 afstandsbedieningen gebruiken.

De illustraties en technische gegevens over de afstandsbedieningen vermeld in dit document zijn zuiver indicatief. Silca behoudt zich het recht voor alle wijzigingen uit te voeren die zij nodig en opportuun acht om de kwaliteit van de Air4 te verbeteren, met behoud van de essentiële productkenmerken.

Air4 Catalogue - P0QM-3

Issued by Silca S.p.A. - Vittorio Veneto, May 2018

ITALY

SILCA S.p.A.

Via Podgora, 20 (Z.I.)
31029 VITTORIO VENETO (TV)
Tel. +39 0438 9136
Fax +39 0438 913800
silca@silca.it
www.silca.biz - www.silca.it

GERMANY

SILCA GmbH

Siemensstrasse, 33
42551 VELBERT
Phone +49 2051 2710
Fax +49 2051 271172
info@silca.de
www.silca.de

UNITED KINGDOM

SILCA Ltd.

Unit 6 Lloyds Court
Manor Royal
CRAWLEY RH10 9QU
Phone +44 1293 531134
Fax +44 1293 531108
sales@silcaltltd.co.uk
www.silcaltltd.co.uk

SPAIN

SILCA KEY SYSTEMS S.A.

C/Santander 73A
08020 BARCELONA
Phone +34 93 4981400
Fax +34 93 2788004
silca@silca.es
www.silca.es

FRANCE

SILCA S.A.S.

12, Rue de Rouen
Z.I. Limay-Porcheville
78440 PORCHEVILLE
Phone +33 1 30983500
Fax +33 1 30983501
info@silca.fr
www.silca.fr

BENELUX

H. CILLEKENS & B.V.

Metaalweg, 4
6045 JB ROERMOND
Phone +31 475 325147
Fax +31 475 323640
info@hcillekens.nl
www.hcillekens.nl

UNITED KINGDOM

ADVANCED DIAGNOSTICS Ltd.

Eastboro Fields
Hemdale Business Park
CV11 6GL Nuneaton
Phone +44 2476 347000
Fax +44 2476 347100
sales@advanced-diagnostics.com
www.advanced-diagnostics.com

UNITED STATES

KABA ILCO CORP.

400 Jeffreys Road
Rocky Mount, NC 27804
Phone 1-252-446-3321
Fax 1-252-446-4702
info.ilco@kaba.com
www.ilco.us



dormakaba Group



NETWORK WITH US